Satisfy Professional's Needs

XGT

Makita®

Cordless Grass Trimmer
UR006G / UR007G / UR008G

XGT 40V max Li-ion

As powerful as 30cc petrol grass trimmer



Max Output
1.0 kW

BL MOTOR ADT AFT XPT WG WET GUARD

XGT 40V max Li-ion

High pow



WG WET GUARD

High water-resistance allows to operate the machine even if it is wet with water.

XPT

eXtreme Protection Technology

Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather

BL MOTOR

Rear end mounted motor


Makes the tool weight balance similar to engine grass trimmers, enabling user to easily lift up the saw head for ridge weed removal, etc.



ADT

Automatic torque Drive Technology


Automatically changes the cutting speed according to grass density.

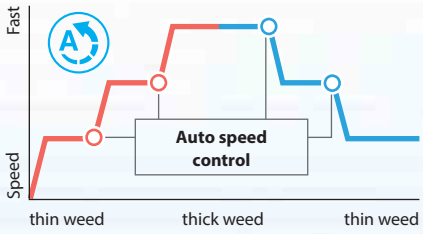


AFT

Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

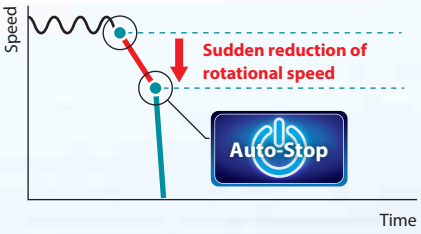

Toolless handle lock mechanism for good portability (UR006G only)

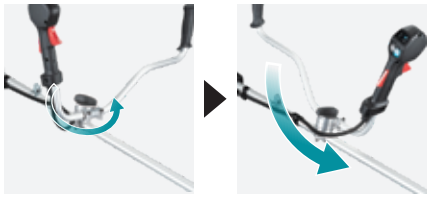



The vertical center line of the handle bar always stays aligned with that of user (UR006G only)



- Enabling user to work with less fatigue even in long continuous operation.
- Allowing for a wider swing.

New tool-less quick fastening handle holder (UR006G only)



- Compatible with two-piece handle bar
- Each handle-to-shaft angle is independently adjustable without tool.

wer as 30cc engine tool

Multi functional control panel: near right hand position for easy access and operation



Large push button main power switch

allows for easy on/off even with gloved hand.

Reverse button



Reverse switch for clearing entangled weeds and grass from cutting head



UR006G

Offset bike Handle

Cutting width: 430mm (17")

similar to 30mL class engine grass trimmers.

Protector (UR006G / UR007G)

- Dual-purpose protector, Nylon cutting head can be used by attaching Extension.
- Cutting width: 255mm with Metal blade 430mm with Nylon cutting head

Max Output

1.0 kW

UR007G

Loop-Handle



UR008G

Loop-Handle

Nylon Cutting Head and Plastic Blade only



Protector (UR008G)

- Designed exclusively for use with Nylon cutting head.
- Narrow design for wide working field
- Cutting width: 430mm

Run Time*

Nylon cutting head

High	Med	Low
12 /	24 /	38 min

with BL4050F

*on a single full battery charge / No load

40Vmax series movie

40Vmax mechanism movie

This movie was filmed in Japan.
Models and specs may vary by country.

Portable Power Pack

PDC01
Powered by up to four 18V LXT batteries



PDC1200
Powered by 36V-40Vmax built-in battery



Charger: DC4001

Adapter set (40Vmax)
Part No. 191N62-4



Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

Accessories

Trimmer head

Part No. 196324-1
Cord/Line : 2.4mm x3.6m
Ref. : UN-74L

Part No. 198266-5
Cord/Line : 2.4mm x6m
Ref. : UN-72L



Part No. 197296-3
Cord/Line : 2.0mm x3m
Ref. : ECO 4L



Part No. 191D89-4
Cord/Line : 2.0mm x4m
Ref. : 96-M10L

Part No. 191D91-9
Cord/Line : 2.4mm x3m
Ref. : 96-M10L



Part No. 198893-8 (EU)
Cord/Line : 2.0mm x3m
Ref. : 95-M10L



Brushcutter blade
For UR006G / UR007G

Blade dia	2-tooth blade	3-tooth blade	4-tooth blade
230mm	197997-3	195298-3	195150-5
255mm	198345-9	195299-1	196895-8

Plastic blade

Cutting width	Plastic blade Set	Replacement plastic blade
255mm	198383-1	198426-9
305mm	199868-0	199870-3

Four-leaf Spiral Nylon cord



Green		Orange	
Size	Part No.	Size	Part No.
2.0mmx15m	197472-9	2.4mmx15m	198501-1
2.0mmx30m	197473-7	2.4mmx30m	198502-9
2.0mmx160m	197474-5	2.4mmx120m	198503-7
2.0mmx280m	197475-3	2.4mmx180m	198504-5

Protection guard for brush cutting blades

Part No. 191B54-1
UR006G / UR007G



Part No. 191B55-9
UR008G



Shoulder strap assembly

Comfort
Part No.122906-3

front



back



Single
Part No.127759-5



Charging Time Reference

	DC40RA (Fast Charging)	DC40RC
BL4020 2.0Ah	**22**min	**30**min
*1**BL4025** 2.5Ah	**28**min	**38**min
*1**BL4040** 4.0Ah	**45**min	**67**min
*1**BL4050F** 5.0Ah	**50**min	**85**min

*1 Recommended battery

Cordless Grass Trimmer
UR006G / UR007G / UR008G

- Variable Speed
- Brake
- Reversing
- Electronic 3-Speed
- Constant Speed
- Soft Start

Cutting Width	*Metal Blade: 255 mm (10") (UR006G / UR007G only)*
	Nylon Cutting Head: 430 mm (17")
	Plastic Blade: 305 mm (12")
No Load Speed (RPM)	*Metal Blade (3 / 2 / 1): 0 - 7,000 / 0 - 5,500 / 0 - 4,600*
	Nylon Cutting Head (3 / 2 / 1): 0 - 5,500 / 0 - 5,000 / 0 - 4,600
	Plastic Blade (305 mm) (3 / 2 / 1): 0 - 7,000 / 0 - 5,500 / 0 - 4,600
Spindle Size	*M10 x 1.25 LH*
Dimensions (L x W x H)	*w/o Cutting Tool, w/ BL4050F:*
	UR006G: 1,840 x 681 x 563 mm (72-1/2 x 26-3/4 x 22-1/4")
	UR007G: 1,840 x 400 x 269 mm (72-1/2 x 15-3/4 x 10-5/8")
	UR008G: 1,828 x 227 x 301 mm (72 x 8-15/16 x 11-7/8")
Net Weight	*UR006G: 5.6 - 6.2 kg (12.3 - 13.7 lbs.)*
	UR007G: 5.2 - 5.8 kg (11.5 - 12.9 lbs.)
	UR008G: 5.0 - 5.6 kg (11.0 - 12.4 lbs.)

Standard Equipment : *Safety Goggles, Metal Blade (UR006G / UR007G) / Nylon Cutting Head / Plastic Blade (country-specific), Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver (UR006G / UR007G), Shoulder Belt, Battery, Charger*

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation
3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202105