Satisfy Professional's Needs


LXT

Cordless Impact Wrench







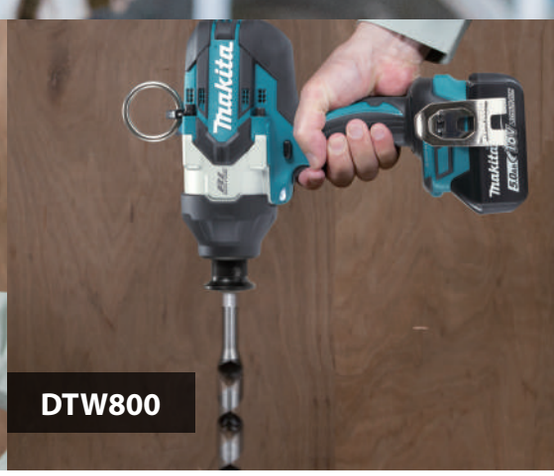

DTW1004

12.7mm (1/2")

Pin-detent Square drive



Max fastening torque **1,050** N·m

DTW1001

19mm (3/4")

C ring Square drive



Max fastening torque **1,250** N·m

DTW1002

12.7mm (1/2")

C ring Square drive



Max fastening torque **1,200** N·m

DTW800

11.1mm (7/16")

hex shank bit holder



Max fastening torque **800** N·m

BL MOTOR XPT



photo: DTW1004



photo: DTW1004

BL MOTOR

XPT



photo: DTW1004

Hanging ring (DTW800 only)



photo: DTW800

Twin LED job light
(with preglow and afterglow functions)



Forward/reverse push button switch

Ergonomically designed handle with rubberized soft grip

Variable speed control by trigger

Hook for operator convenience

Electronic 3 stage impact power selection






photo: DTW1004

Accessories

Socket assembly

model:
DTW1004 /
DTW1001 /
DTW1002



Extension handle set



Protector



Pin 4 set

model:
DTW1004



Charging Time

	Fast Charging DC18RC	DC18SD
BL1815N 1.5Ah	**15** min	**30** min
BL1820B 2.0Ah	**24** min	**45** min
BL1830B 3.0Ah	**22** min	**60** min
BL1840B 4.0Ah	**36** min	**90** min
BL1850B 5.0Ah	**45** min	**110** min
BL1860B 6.0Ah	**55** min	**130** min

Cordless Impact Wrench

DTW1004 1/2" (12.7 mm) / DTW1001 3/4" (19 mm) / DTW1002 1/2" (12.7 mm) / DTW800 7/16" (11.1 mm)

- Variable Speed
- Brake
- Reversing
- Electronic 3-Speed
- Built-in Job Light
- Carrying Case

Standard Equipment :
Charger, Battery, Hook

	DTW1004	DTW1001	DTW1002	DTW800
Fastening capacities	*Standard bolt: M12 - M30 (1/2 - 1-1/4")*	*Standard bolt: M12 - M30 (1/2 - 1-1/4")*	*Standard bolt: M12 - M30 (1/2 - 1-1/4")*	*Standard bolt: M12 - M24 (1/2 - 1")*
	High strength bolt (Grade 10.9): M10 - M20 (3/8 - 3/4")	*High strength bolt: M10 - M24 (3/8 - 1")*	*High strength bolt: M10 - M24 (3/8 - 1")*	*High strength bolt: M10 - M22 (3/8 - 7/8")*
	High strength bolt (Grade F10T): M16 - M24 (5/8 - 1")			
Square drive	*12.7 mm (1/2")*	*19 mm (3/4")*	*12.7 mm (1/2")*	*11.1 mm (7/16")*
Max fastening torque	*1,050 N·m (780 ft.lbs.)*	*1,250 N·m (920 ft.lbs.)*	*1,200 N·m (890 ft.lbs.)*	*800 N·m (590 ft.lbs.)*
Nut-busting torque	*1,300 N·m (960 ft.lbs.)*	*1,700 N·m (1,250 ft.lbs.)*	*1,600 N·m(1,180 ft.lbs.)*	-
No load speed (RPM)	*Hard / Med. / Soft: 0 - 2,000 / 0 - 1,000 / 0 - 900*	*Hard / Med. / Soft: 0 - 1,800 / 0 - 1,000 / 0 - 900*	*Hard / Med. / Soft: 0 - 1,800 / 0 - 1,000 / 0 - 900*	*Hard / Med. / Soft: 0 - 1,800 / 0 - 1,000 / 0 - 900*
Impacts per minute (IPM)	*Hard / Med. / Soft: 0 - 2,400 / 0 - 2,000 / 0 - 1,800*	*Hard / Med. / Soft: 0 - 2,200 / 0 - 2,000 / 0 - 1,800*	*Hard / Med. / Soft: 0 - 2,200 / 0 - 2,000 / 0 - 1,800*	*Hard / Med. / Soft: 0 - 2,200 / 0 - 2,000 / 0 - 1,800*
Vibration level	*Impact tightening of fasteners of the maximum capacity of the tool: 18.4 m/s²*	*Impact tightening of fasteners of the maximum capacity of the tool: 15.5 m/s²*	*Impact tightening of fasteners of the maximum capacity of the tool: 18 m/s²*	*Impact tightening of fasteners of the maximum capacity of the tool: 24 m/s²*
Sound pressure level	*98 dB(A)*	*101 dB(A)*	*100 dB(A)*	*98 dB(A)*
Sound power level	*106 dB(A)*	*109 dB(A)*	*108 dB(A)*	*106 dB(A)*
Dimensions (L x W x H)	*w/ BL1830B / BL1840B / BL1850B / BL1860B: 223 x 91 x 289 mm (8-3/4 x 3-5/8 x 11-3/8")*	*w/ BL1830B / BL1840B / BL1850B / BL1860B: 229 x 91 x 289 mm (9 x 3-5/8 x 11-3/8")*	*w/ BL1830B / BL1840B / BL1850B / BL1860B: 229 x 91 x 289 mm (9 x 3-5/8 x 11-3/8")*	*w/ BL1830B / BL1840B / BL1850B / BL1860B: 229 x 91 x 303 mm (9 x 3-5/8 x 11-7/8")*
Net weight	*3.1 - 3.4 kg (6.8 - 7.5 lbs.)*	*3.4 - 3.7 kg (7.5 - 8.2 lbs.)*	*3.3 - 3.6 kg (7.3 - 8 lbs.)*	*3.4 - 3.7 kg (8.2 - 7.5 lbs.)*

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation
3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202310