
Inductive sensor
IO-Link Communication and Configuration
NI50U-QV40-IOL6X2-H1141



Type designation	NI50U-QV40-IOL6X2-H1141
Ident no.	1625872
Rated switching distance Sn	50 mm
Mounting conditions	Non-flush, flush mountable
Secured operating distance	≤ (0,81 x Sn) mm
Repeat accuracy	≤ 2 % of full scale
Temperature drift	≤ ± 10 %
	≤ ± 20 %, ≤ -25 °C v ≥ +70 °C
Hysteresis	3…15 %
Ambient temperature	-25…+70 °C
Operating voltage	10…30 VDC
Residual ripple	≤ 10 % U_{ss}
DC rated operational current	≤ 150 mA
No-load current I_0	≤ 20 mA
Residual current	≤ 0.1 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes/ Cyclic
Voltage drop at I_e	≤ 1.8 V
Wire breakage/Reverse polarity protection	yes/ Complete
Output function	4-wire, NO/NC, PNP/NPN, IO-Link
Output 1	Switching output or IO-Link mode
Output 2	switching output
Protection class	⧈
Switching frequency	0.5 kHz
IO-Link	
IO-Link Specification	V 1.1
IO-Link port type	Class A
Communication Mode	COM 2 (38.4 kBaud)
Process data width	16 bit
Switchpoint information	2 bit
Status bit information	3 bit
Frame type	2.2
Minimum cycle time	8 ms
Function Pin 4	IO-Link
Function Pin 2	DI
Maximum cable length	20 m

- **Rectangular, height 40 mm**
- **Variable orientation of active face in 5 directions without tools**
- **Plastic, PBT-GF30-V0**
- **High luminance corner LEDs**
- **Optimum view on supply voltage and switching state from any position**
- **Factor 1 for all metals**
- **Increased switching distance**
- **Protection class IP68**
- **Resistant to magnetic fields**
- **Auto-compensation protects against predamping**
- **Partially embeddable**
- **DC 4-wire, 10…30 VDC**
- **M12 x 1 connector**
- **Configuration and communication via IO-Link v1.1 or via standard I/O**
- **Electrical outputs independently configurable**
- **Switching distance can be parametrized per output and hysteresis**
- **Identification via 32-byte memory**
- **Temperature monitoring with adjustable limits**
- **Various timer and pulse monitoring functions**

Wiring Diagram

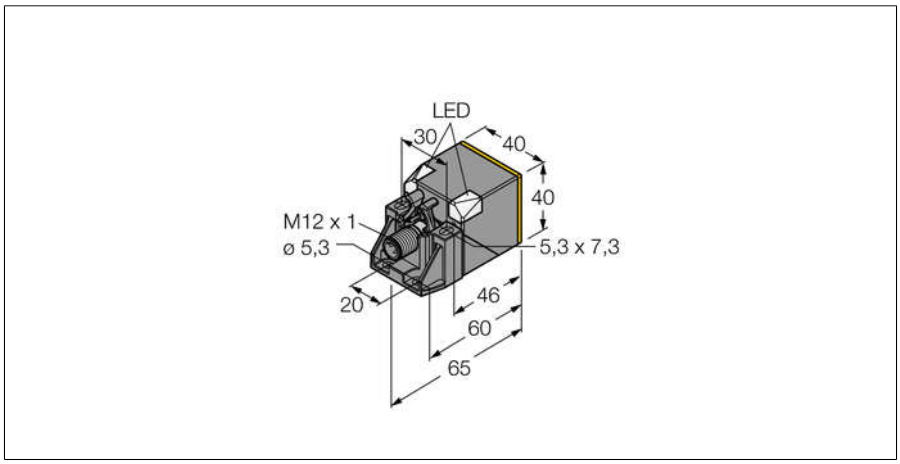

Functional principle

Inductive sensors detect metal objects contactless and wear-free. *uprox®3* sensors have significant advantages due to their patented ferrite-coreless multicoil system. They excel in largest switching distances, maximum flexibility and operational reliability as well as efficient standardization. In addition, the *uprox®3-IO-Link* sensors allow certain parameters to be set within predefined limits and various device functions to be configured to customer needs, using an IO-Link Master. For detailed information refer to the *uprox®3-IO-Link* manual.

Edition • 2019-02-15T20:33:52+01:00

Inductive sensor
IO-Link Communication and Configuration
NI50U-QV40-IOL6X2-H1141


Design	Rectangular,QV40
Dimensions	65 x 40 x 40 mm
	variable orientation of active face in 5 directions
Housing material	Plastic, PBT-GF30-V0, Black
Active area material	Plastic, PA6-GF30-X, yellow
Electrical connection	Connectors, M12 × 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
MTTF	874 years acc. to SN 29500 (Ed. 99) 40 °C
Packaging unit	1


Power-on indication	2 × LEDs,Green
Switching state	2 × LEDs, Yellow
Included in delivery	Fixing clamp for QV40


Edition • 2019-02-15T20:33:52+01:00

Inductive sensor
IO-Link Communication and Configuration
NI50U-QV40-IOL6X2-H1141

Distance D	240 mm
Distance W	105 mm
Distance S	60 mm
Distance G	300 mm
Distance N	30 mm
Width active area B	40 mm

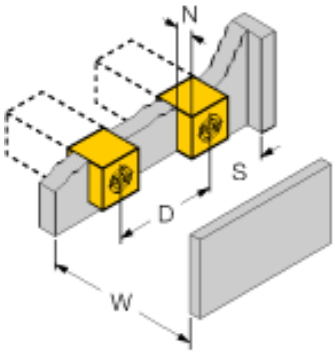

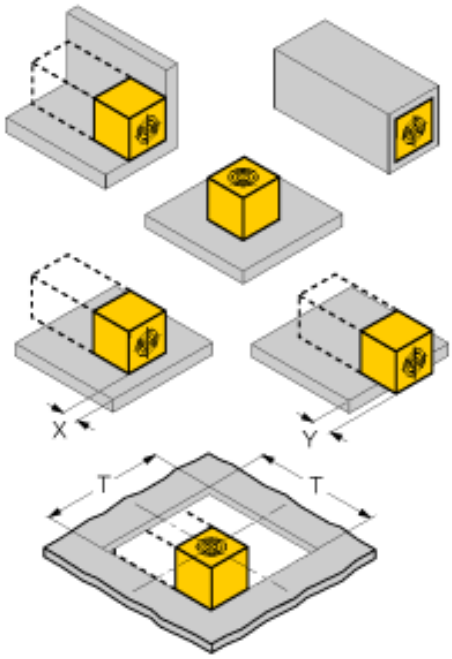




Flush mounting
1-side mounting: Sr = 35 mm; D = 240 mm
2-side mounting: Sr = 25 mm; D = 240 mm
3-side mounting: Sr = 20 mm; D = 80 mm
4-side mounting: Sr = 17 mm; D = 60 mm

Backside as well as recessed mounting with reduced switching distance

Recessed mounting in metal:
x = 10 mm: Sr = 20 mm
x = 20 mm: Sr = 20 mm
x = 30 mm: Sr = 20 mm
x = 40 mm: Sr = 20 mm

Protruded mounting:
y = 10 mm: Sr = 40 mm
y = 20 mm: Sr = 50 mm
y = 30 mm: Sr = 50 mm
y = 40 mm: Sr = 50 mm

Mounting in aperture plate: T = 150 mm:
Sensor with twisted turning angle
On metal Sr = 50 mm
Metal-enclosed on one side Sr = 25 mm
Metal-enclosed on two sides Sr = 15 mm
Metal-enclosed on three sides Sr = 12 mm

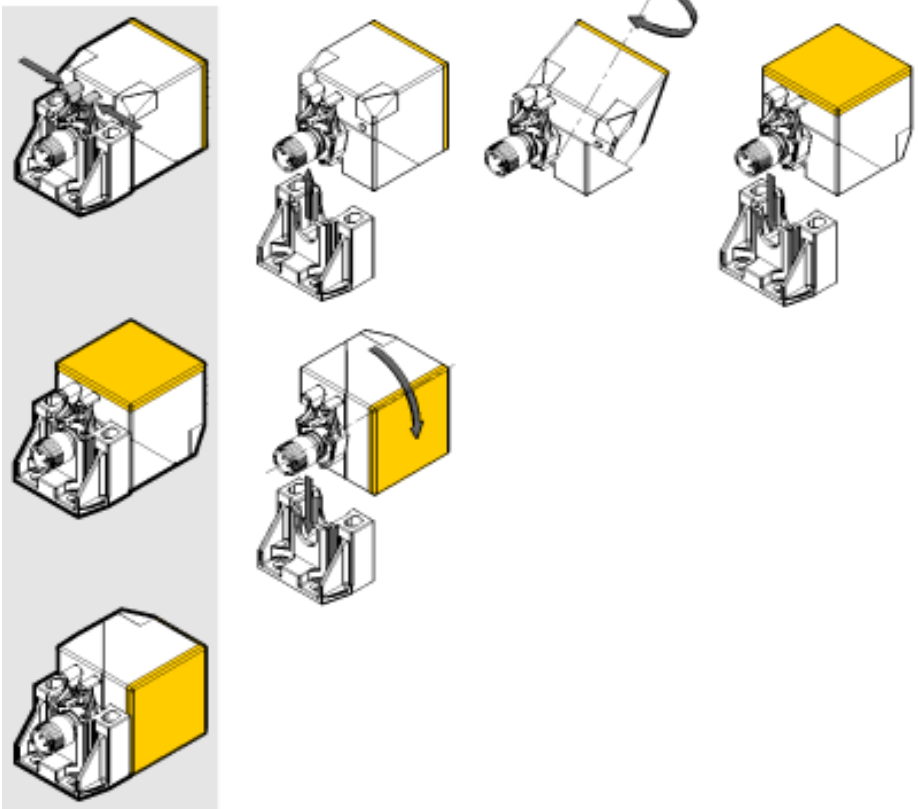



With a single action the active face can be positioned in 5 directions without tools.

A light squeeze of the bracket is enough to release the sensor from the fixing clamp. Afterwards, the active face can easily be twisted to change the position. Once the final position is attained, the sensor is simply inserted in the fixing clamp until the clamp snaps in. Safe and easy mounting is thus guaranteed.

Edition • 2019-02-15T20:33:52+01:00

Inductive sensor
IO-Link Communication and Configuration
NI50U-QV40-IOL6X2-H1141

Accessories

Type code	Ident no.	Description	
USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port	
BSS-CP40	6901318	Mounting bracket for rectangular devices; material: Polypropylene	

Edition • 2019-02-15T20:33:52+01:00