
Kraus & Naimer

Catalog 101
04/2021

Optional Extras and Enclosures

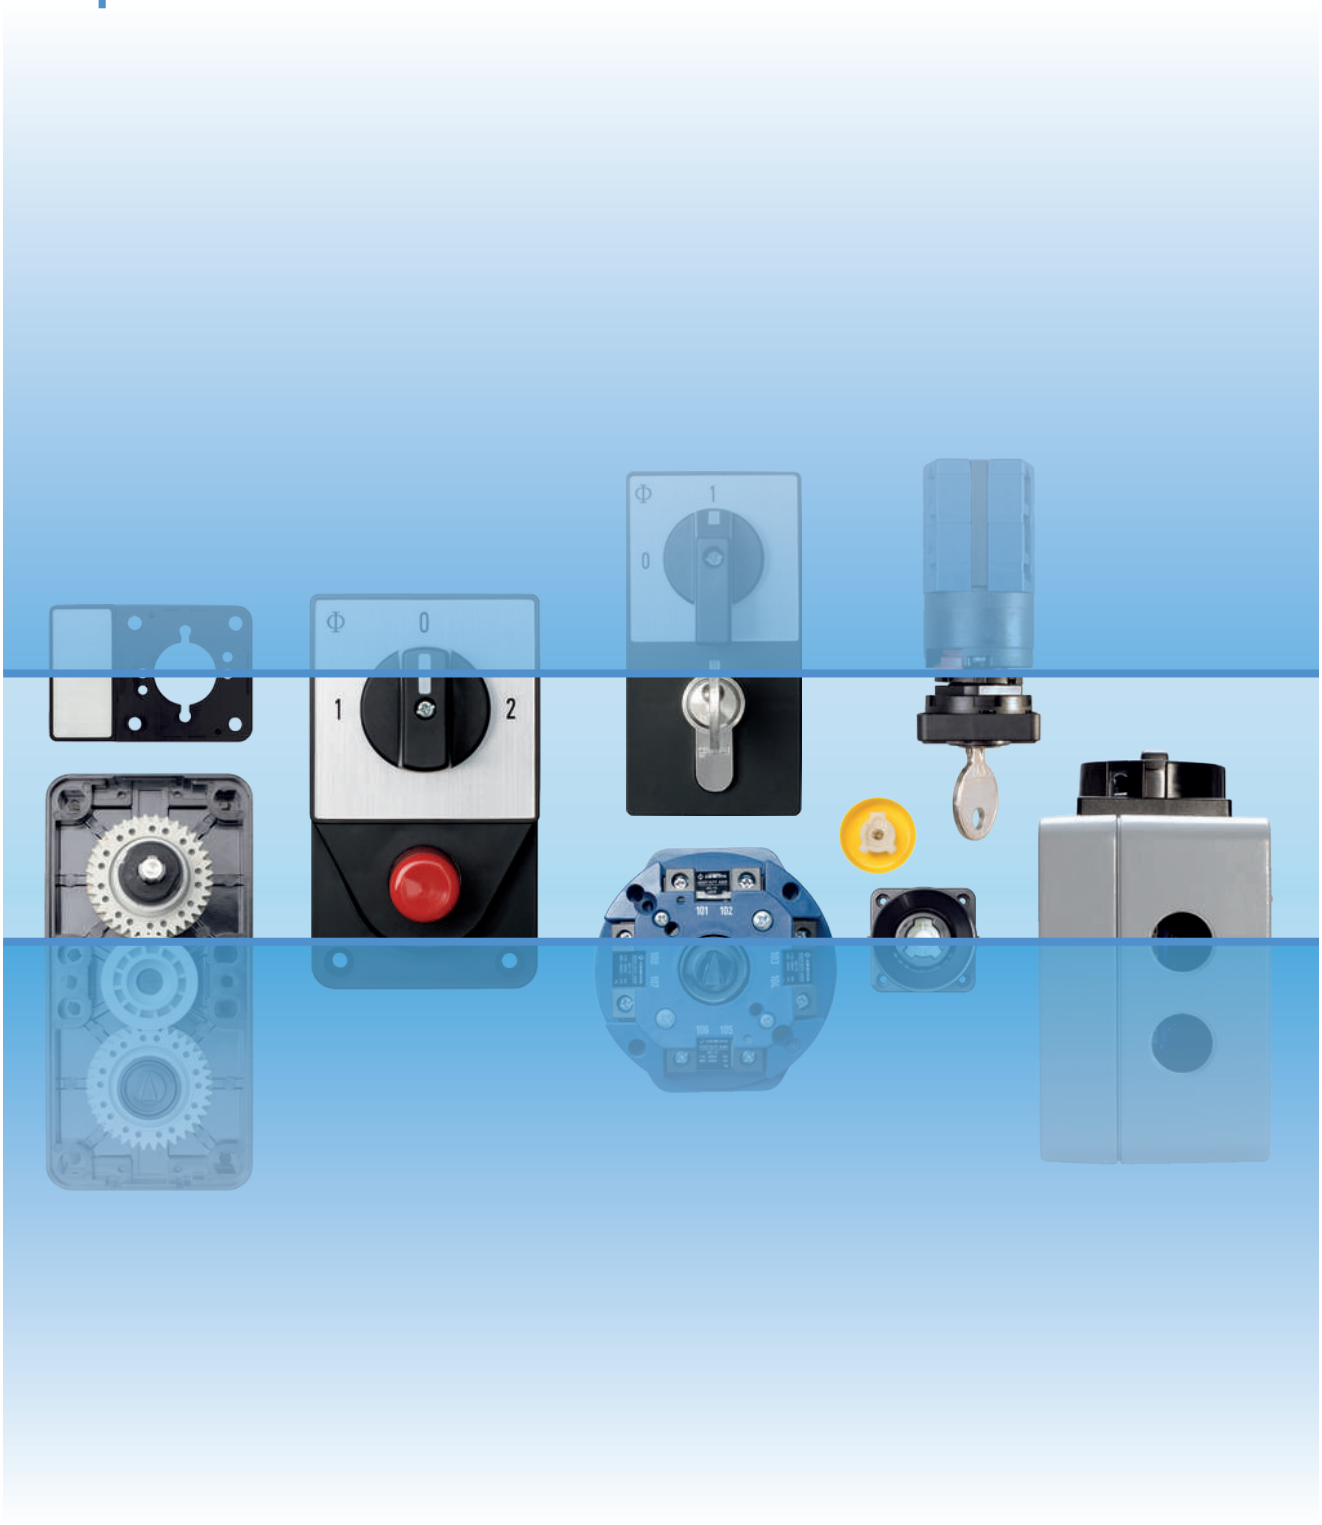

Kraus & Naimer


The development of the Blue Line rotary switch and motor starter product ranges is based on more than hundred years experience by Kraus & Naimer in the design and manufacture of electrical switchgear. Kraus & Naimer pioneered the introduction of the cam operated rotary switch and continues to be recognized as the world leader in that product field.

BLUE LINE

Blue Line products are protected by numerous patents through-out the industrial world. They are built to national and international standards and designed to withstand adverse temperatures and climates.

Blue Line products are accepted and universally recognized for their quality and workmanship. They are supported by a worldwide sales and service organization.

The Kraus & Naimer Registered Trademark



WORLDWIDE SYMBOL FOR QUALITY SWITCHGEAR

Disconnectors and Main Switches with Optional Extras acc. to IEC 60947-3 see Catalog 500

Contents

	Description Page	Dimensions Page
Construction Data	4	-
How to order	5	-
Optional Extras:		
Add-on Face Plates	24	41
Auxiliary Contacts	10	29
Bayonet/Switch Coupling	13	34
Control and Indicator Lamp Devices	9, 10	29
Door Clutches	7, 8	28, 31
Electromechanical Interlock	12	33
Ground and Neutral Terminal	13	35
Indicator Lamp Devices	10	31
Interlock between Switches	11	32
Key-lock Devices	17-20	36-39
Motor Drive	16	35
Padlock Devices	21	39, 40
Protective Cover	13	-
Push Button Interlock	12	33
Push-pull Interlock	11	32
Ratchet Coupling	15	34
Shaft Extension	6	28
Slip Clutch	15	34
Special Drive Units	14	35
Spring Return over several Positions	15	31
Stop and Go Device	11	31
Tandem Drives	13	32
Terminal Lugs	6	-
Trip Devices	16	34
Trip Indicator	8	-
Uni-directional Interlock	15	-
Switch Type Variations	23	40, 41
Enclosures	25-27	42-44
Blue Line Switchgear: Summary	46	-


Construction Data

The large cam switch line of the A, C, CA, CAD, CG, CH, CHR, D, L and X-series is complemented by a large number of optional extras and enclosures.
This substantial number of optional extras and enclosures is needed in order to meet the requirements of the world market.



One or more optional extras may be used in combination with any one switch provided they are of the same switch size. A few exceptions where this cannot be accomplished are noted on the following tables. In some cases, for technical strength or esthetic reason, it may be desirable that a switch be combined with an optional feature of the next larger switch size. Many options provide for such a possibility.

< back to table of contents >

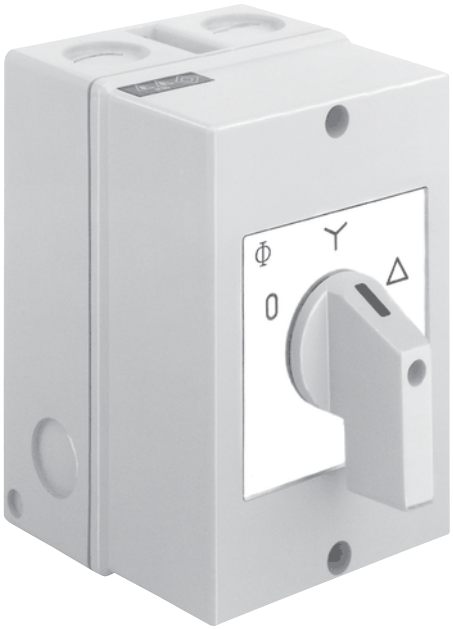

Enclosures are manufactured from plastic or aluminum material. They offer a high degree of protection (up to IP 66/67) thereby permitting switch operation under adverse environmental conditions. All KL- and KS-enclosures are flame resistant in accordance with UL94V-0. The materials used provide considerable strength and the best possible protection against corrosion. A large number of possibilities exist for combining switches, enclosures and appropriate optional extras.

How to order

Disconnectors and Main Switches with Optional Extras acc. to IEC 60947-3 see Catalog 500

When ordering Blue Line cam switches with optional extras, the following method of coding is required. Details on the enclosures and optional extras are shown in this catalog.

1. Switch Type

See Catalog 100, 110, 120, 130 or DC-Switch G20/G20S.

2. Switch Function

See Catalog 100, 110, 120, 130 or DC-Switch G20/G20S.

3. Type of Mounting

See Catalog 100, 110, 120, 130 or DC-Switch G20/G20S.

4. Enclosures

The assigned code numbers for the various enclosures are shown in this catalog on pages 25-27.

CA20B **A202** **PN**
V840G/

5. Optional Extras

Pages 6-24 list optional extras and their coding. A ● indicates the switch sizes in which the optional extra shown is available.

Possible combinations of switches of the same switch size with an optional extra of the next larger switch size are indicated by a ●. Only in this case indicate the next larger switch size in front of the coding.

There are some optional extras in existence which are available in a variety of programs. Additional ordering data may, therefore, be required. In the above case, a color description is required for the cover and handle disc.

Switch Types	Size of Mounting	Switch Types	Size of Mounting	Switch Types	Size of Mounting	Switch Types	Size of Mounting
A11	S1	CA10R	S0	CH10B	S1	DHR12	S0
A11C	S2	CA10B	S1	CH16	S0	DH12B	S1
A25	S1	CA11	S0	CH16B	S1	DHR12B	S1
A25C	S2	CA11B	S1	CHR6	S00	G20	S0
C26	S1	CA20	S0	CHR10	S0	G20S	S0
C26C	S2	CA20B	S1	CHR10B	S1	L350	S2
C32	S1	CA25	S0	CHR16	S0	L351	S2
C32C	S2	CA25B	S1	CHR16B	S1	L400	S3
C42	S1	CA40	S1	DK10	S0	L600	S3
C43	S2	CA50	S1	DH10	S0	L630	S2
C80	S2	CA63	S1	DHR10	S0	L631	S2
C125	S2	CAD11	S0	DH10B	S1	L800	S3
C200-4	S2	CAD12	S0	DK11	S0	L1000	S2
C315	S3	CG4	S00	DH11	S0	L1200	S3
C316	S3	CG4-1	S00	DHR11	S0	L1600	S3
CA4	S00	CGD4-1	S00	DH11B	S1	L2000	S3
CA4N	S00	CG6	S00	DHR11B	S1	X200	S3
CA4-1	S00	CG8	S0	DK12	S0	X400	S3
CAD4-1	S00	CH6	S00	DKR12	S0	X630	S3
CA10	S0	CH10	S0	DH12	S0		

< back to table of contents >

Optional Extras	Code	For Switch Sizes S00	S0	S1	S2	S3

Terminal Lugs



For screw with wire clamps

Terminal lugs facilitate the connecting of wires in installations where the terminals are not easily accessible.
All X switches, L switches and switches type C315/ C316 will be supplied with terminal lugs as standard.

Code	S00	S0	S1	S2	S3
M900		G20 G20S	A11 A25 C26 C32 C42	●	



Terminal lugs for quick connect termination

Each quick connect terminal may accept either one 6,3 mm quick connect lug or two 2,8 mm quick connect lugs. Switch type CA4 only accepts one quick connect lug 2,8 mm.

Code	S00	S0	S1	S2	S3
M930	[1] CA4 CH6	[1] CH10 CH16 DH10 DK10 G20 G20S	[1] A11 A25 CH10B CH16B DH10B		

Shaft extension



Dimensions p. 28

With asymmetric profile

Shaft length not adjustable

Shaft with unlimited adjustable length
with set screw
with shear ring

Adjustable shaft can be set to the desired length in a pre-mounted switch with VE mounting plate.

Code	S00	S0	S1	S2	S3
L100		●	●		
L100B			●		
M004D		●	●	●	●



Dimensions p. 28

With square profile

Shaft length not adjustable ☐ 6 mm ☐ 5 mm

Shaft with unlimited adjustable length
with set screw
with clamping bushing

Code	S00	S0	S1	S2	S3
L100A		●	●		
L105A		●			
M004E			●	●	●

Ordering data: Free shaft length or dimension from mounting surface to cover.

[1] The coding of the switch type may change as shown in Catalog 100, 120 and 130, page 6.

< back to table of contents >

< back to table of contents >

Optional Extras	Code	For Switch Sizes S0	S1	S2	S3
Standard Door Clutch					
 Dimensions p. 30 With shaft extension, shaft with unlimited adjustable length shaft fixation with set screw Front protection IP 40 Front protection IP 66/67	**M280E** **M280E/.EF**	●● ●●	● ●	● ●	● ●
 **Door clutches M700/M701**[1] For 3 padlocks	mm		4-8		
Handle lockable with padlocks Protection IP 66 The face Plate is available in black, yellow and alu. The handle may be supplied in black and red.	**M700**	●	●	●	●
 Dimensions p. 30 Standard handle and standard face plate Protection IP 65 The M700/M701 is a padlock door clutch and a mechanical interlocking safety device. Using the device the electrical panel may be opened only when the switch is in the OFF position and no padlock is fitted. Note: Only in the ON position can knowledgeable personnel using a simple tool to defeat the interlock. The M700's flexibility allows for successful installation with as much as + or - 5 mm of misalignment between the shaft and door.	**M701**	●●	●●	●	
 Unlock insert for the M700 ff. To open the door in ON-position. (After the locking has been made inactive, it is necessary to take effective precautions against an opening of the door by unauthorized persons.)	**S1D M700 29**				
 **Door clutches M800/M810.**[1] For 3 padlocks Door clutch utilizes a simple and robust design and features a compact size. It has an interlock in the ON-position while a padlock can be fitted in the OFF-position. The door clutch may be opened only if the switch is in the OFF-position. In special cases, however, authorized people have a requirement to open the door, even if the switch is in the ON-position. Further characteristics are the single hole mounting with IP 66/67 protection degree, as well as the Accepted Misalignment up to ± 3 mm horizontally and ± 5 mm vertically. Maximum 3 padlocks with a minimum shackle diameter from 5 up to 7,5 mm are possible.	mm		5-7,5		
	M800		●	●	
 Dimensions p. 30	**M810**	●	●		
Ordering data:	Dimension from face of the switch to the cover or dimension from mounting surface to cover as well as the interlock program and the color selection.				

[1]Additional shaft extension must be specified.

Optional Extras

Simplified Door Clutch



Single hole mounting 22 mm, protection IP 66.

Additional profile extension parts and shaft extension must be specified.

	Code	For Switch Sizes S0	S1	S2	S3
For shaft extension	**M295/.A**	●	●		
For profile extension parts	**M295/.B**	●	●		



With padlock device and single hole mounting 22 mm, protection IP 66.

Additional shaft extension must be specified.

	Code	For Switch Sizes S0	S1	S2	S3
	mm	6-8			
For 2 padlocks	**V840E**	●	●		
	mm	6-6,5			
For 2 padlocks	**V840D**	●			
	mm	7-8			
For 3 padlocks	**V840G**	●	●		
	mm	4-7			
For 4 padlocks	**V840F**	●	●		



The cover disc is available in black, yellow and electro-gray. The handle may be supplied in red, black and electro-gray.



	Code	For Switch Sizes S0	S1	S2	S3
	mm	3-7	4-7,5		
Up to 4 padlocks	**V845**	● ●	●		

Operation of the locking bar from the front.
Available in black, red and electro-gray.



Centering aid for simplified door clutches with single hole mounting and shaft extension — **M600** — ● (S1)

Misalignment between the shaft and mounting are compensated in all 4 directions.

Dimensions p. 29

Ordering data: Free shaft length or dimension from mounting surface to cover or distance from face of the switch to the cover and color selection.

Trip Indicator



	Code	For Switch Sizes S0	S1	S2	S3
With square face plate	**M120/A**	●	●		
With rectangular face plate	**M120/B**	●	●		

The trip indicator used on switches with spring return positions. It includes a colored indicator to show the last spring return position that handle has been turned.
Two possibilities for flag indicator exist:
a) left red - right green
b) left green - right red

Ordering data: The color to appear after left or right operation.

< back to table of contents >

< back to table of contents >

Optional Extras	Code	For Switch Sizes S00	S0	S1	S2

Control and Indicator Device (without Lamp)



Dimensions p. 29

For 1 lamp with BA9s socket

Max. power 2 W, Protection IP42

The control and indicator device with total switching angle of 360° includes a single hole mounting 22/30 mm with locking nut and can be mounted and dismounted without tools.

The following front end assemblies are available:
- Front ring (alternatively with add-on face plate)
- Face plate 48 x 48 mm
  (alternatively with add-on face plate)
- Face plate 64 x 64

Q120[1] ●



The operation may be as follows:
- Turn to operate
- Push-to-turn operation (e.g. discrepancy switch Q120/F)

Q120/F[1] ●

The push-to-turn version is available with 1 or 2 auxiliary contacts and a mechanical interlock. Select between a contact system with rigid contact bridge for excellent AC-15 making and breaking capabilities. Also available with gold contacts for use in aggressive envi-ronments. Or select a H-bridge design with „cross-wire“ gold-plated contact system for low voltages and currents.



LED-lamps with 4 chips and integrated bridge rectifier, BA9s socket

Colour	Voltage	Article Number
white	24 V–28 V AC/DC	P SN/LW024
red		P SN/LR024
green		P SN/LG024
white	220 V AC/DC	P SN/LW220
red		P SN/LR220
green		P SN/LG220
white	110 V–120 V AC/DC	P SN/LW110
red		P SN/LR110
green		P SN/LG110

Ordering data: Front end assembly + function of the mechanical interlock, quantity and operation of the auxiliary contacts and type of the contact system.

[1] Ambient temperature: 35 °C during 24 hours with peaks up to 40 °C

Control and Indicator Device with Light Conductor



The luminous source is a LED module with yellow light-emitting diode mounted at the end of the switch.
The transmission of light occurs via a light conductor.

Q100B ●

Technical Data:

Voltage	Frequency	Power Consumption
24 V	AC 50 - 60 Hz, DC	0,2 W
48 - 60 V	AC 50 - 60 Hz	0,3 W
48 - 60 V	DC	1 W
110 - 120 V	AC 50 - 60 Hz	0,3 W
110 - 120 V	DC	1,4 W
220 - 240 V	AC 50 - 60 Hz	0,3 W
with test terminal:		
24 V	DC	0,2 W
48 - 60 V	DC	1 W
110 - 120 V	DC	1,4 W



Q100B *E ●

Types of version
Without interlock (handle “turn to operate“)
With interlock (handle “push to turn“)
The control and indicator device is available for single hole mounting and mosaic.

Dimensions p. 29

Ordering data: Operating voltage and type of version.

Optional Extras	Code	For Switch Sizes S0	S1	S2	S3

Control and Indicator Device (without Lamp)



Dimensions p. 29

For 6 lamps with socket T6,8
Length of lamp 42-44 mm
Max. power per lamp 2,5 W

According to the operating voltage the lamps have to be paralleled or connected in series. As front end assembly an alu-face plate 51,8 x 51,8 mm is supplied.

Code	S0	S1	S2	S3
Q100/A		●		

Indicator Lamp Device (without Lamp)



Dimensions p. 31



With square face plate

With white lamp socket[1]
Without lamp socket

The lamp socket for switch size S0 had been designed for glowing lamps with socket E10.
For switches size S1, S2 and S3 the sockets are provided for lamps with thread E14.

With rectangular face plate

With white lamp socket[1]
Without lamp socket

[1]Additional colors on request.

Code	S0	S1	S2	S3
Q200/A1	●	●	●	●
Q200/A2	●	●	●	●
Q200/B1	●	●		
Q200/B2	●	●		

Auxiliary Contacts



Dimensions p. 29

These auxiliary contacts are controlled with a cam which can be programmed. The max. number of the auxiliary contacts for switches of size S1 and S2 is 4 pcs. and for switches of size S3 is 6 pcs.
Select between a contact system with a rigid bridge for excellent AC-15 making and breaking capabilities or a H-bridge design with “cross-wire“ contacts (sizes S1 and S2) for low voltages and currents. The contact systems with gold contacts or gold-plated contacts allow for use in aggressive environments also.
In cases where more than 4 resp. 6 auxiliary contacts are required, an auxiliary switch should be used alternatively.

Size				S1	S2/S3
Rated Insulation Voltage U_i			V	440	690
Rated Thermal Current I_u/I_{th}			A	10	16
AC-21	Switching of resistive loads, including moderate overloads		A	10	16
AC-15	Switching of control devices, contactors, vales etc.	110 V-240 V	A	2,5	6
		380 V-440 V	A	1,5	3
		500 V	A	-	1,5
Short Circuit Protection					
	Max. fuse size gG-charakteristic		A	10	10
Max. Permissible Wire Gage - copper wires only					
	single-core or stranded wire		mm^2	1,5	2,5
	Flexible wire		mm^2	1,5	2,5
	Flexible wire with sleeving in accordance with DIN 46228		mm^2	1	2,5

Ordering data: Quantity and operation of the auxiliary contacts and type of the contact system.

Code	S0	S1	S2	S3
M510B		A11 A25 CA40 CA50 CA63 C26 C32 C42	C80 C125 L350- L1000	●

< back to table of contents >

< back to table of contents >


Optional Extras		Code	For Switch Sizes S0	S1	S2	S3

Push-pull Interlock



Dimensions p. 32

AC-15	220 V-240 V 380 V-440 V	2,5 A 1,5 A



Dimensions p. 32

AC-15	240 V 500 V	6 A 3 A

To pull lateral spring return	**V110A**	●			
To pull lateral latching	**V115A**	●			
To push lateral spring return	**V130A**	●			
To push lateral latching	**V135A**	●			

The push-pull device is used to interlock the switch so that the handle can be rotated only when pushed or pulled. The push-pull device can be programmed to allow the interlock to operate only between pre-determined switch positions. Auxiliary contacts can be operated by means of the axial movement of the handle. For switches size S0 the max. number of auxiliary contacts is 2 pieces for all other sizes 8 pieces. In addition switches size S0 can also be combined with a trip indicator.

To pull lateral spring return	**V110**		●	●	●
To pull lateral latching	**V115**		●		
To pull and to push lateral spring return	**V120**		●	●	●
To push lateral spring return	**V130**		●	●	●
To push lateral latching	**V135**		●		

Ordering data: Description of the interlocking program, number and operation of the auxiliary contacts.

Stop and Go Device



Dimensions p. 31

The stop and go device prevents a fast switching thru the center OFF position. This is only possible with a 60° switching angle. The stop and go device only becomes activated in the center switch position, in either in both or one direction.	**V160**	●			

Ordering data: Operation of the stop and go device.

Interlock between Switches



Dimensions p. 32

For 2 switch columns	**V600/B**		●	●	●

An interlock between 2 or 3 switch columns permits the operation of one switch only when the other switch or switches are located in a pre-determined switching position. For heavy duty service reinforced devices are available.

For 3 switch columns	**V600/C**		●	●	●

Ordering data: Description of the interlocking program.

Optional Extras	Code	For Switch Sizes S0	S1	S2	S3

Push Button Interlock



With square face plate

Switching only possible if push button is pressed.

Up to 4 auxiliary contacts can be operated by pressing the push button.

V400/A1 ● ●[1] ● ●



With rectangular face plate

Switching only possible if push button is pressed.

V400/B1 ● ●[1]

Dimensions p. 33

Ordering data: Number and operation of the auxiliary contacts.

Electromechanical Interlock[2]



For switches size S1

The electromechanical interlock locks the switch in any switching position. The interlock device is operated by energizing or de-energizing the electromechanical system. Adding auxiliary contacts to the switch permits the device to be operated only in pre-determined positions.

The optional extra S1 V140/2 can be equipped with a positive breaking auxiliary contact according to IEC 60947-5-1

24 V - 600 V 50 Hz/60 Hz
11 W Power Consumption

V140 ●



For switches size S2 and S3 or for switches size S1 with DC solenoid

V140 ● ● ●



Magnet
available Voltage:
24 V - 240 V 50 Hz/60 Hz /DC
20 W Power Consumption

S1E V140/

Dimensions p. 33

Ordering data: Advise if the interlock is activated either by energizing or de-energizing of the electrical system. Coil voltage also required.

[1] With auxiliary contacts available only up to switch type CA25B.

[2] Ambient temperature: 35 °C during 24 hours with peaks up to 40 °C.

< back to table of contents >

< back to table of contents >

Optional Extras	Code	For Switch Sizes S00	S0	S1	S2	S3

Protective Cover



The protective cover prevents accidental contact with current-carrying terminals.

Code	S00	S0	S1	S2	S3
M160			C26 C32 C42 A25	C80 C125	C315 C316 L400

Ground and Neutral Terminal



Dimensions p. 35

	Code	S00	S0	S1	S2	S3
Ground terminal	**H040/E**		●			
Neutral terminal	**H040/N**		●			
Ground and neutral terminal	**H040/NE**		●			

Tandem Drive



Dimensions p. 32

	Code	S00	S0	S1	S2	S3
For 2 switch columns Two or three switch columns can be operated simultaneously. Special programs are available to reinforce the device for heavyduty applications.	**M300/B**			●	●	●
For 3 switch columns	**M300/C**			●	●	●
For 4 switch columns	**M300/D**					●

Bayonet/Switch Coupling



Dimensions p. 34

The device is used to couple switches into one column

	Code	S00	S0	S1	S2	S3
Switches of the same size	**M270**			●	●	●
Switches of different sizes	**M275**	●	●	●	●	●

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

Special Drives



Dimensions p. 35

Heavy duty drive unit

The device is designed to allow customer to couple his own operating device to the switch.

G800/A ●



Dimensions p. 35

Heavy duty drive unit with actuator and roller

G800/B ●



Dimensions p. 35

Double action lever

G800/C ●



Dimensions p. 35

Rope operation

Available for spring return, maintained or stepping operation.

G900/B ●

< back to table of contents >

Optional Extras	Code	For Switch Sizes S0	S1	S2	S3

Spring Return over several Positions



Dimensions p. 31

Spring return from both sides	**M470/A**	●●	●	●	
Spring return from one side	**M470**	●●	●		

Spring return for angular displacement up to 30° can be accomplished by using the latching mechanism only. If a large number of contacts must be opened simultaneously or a total angular displacement is larger than 30° over which the spring return is operational, the switch must use one of the spring return devices.
Spring return from both sides can be designed to permit maintained position on each side of center.

Ordering data: For M470, specify spring return from either left or right side and details of maintained positions, if required.

Uni-directional Interlock



The uni-directional interlock prevents the switch from being operated counterclockwise. The interlock may be in either all positions or in pre-determined positions only.

	M400	●	●	●	●

Ordering data: Specify which positions should be interlocked.

Slip Clutch and Ratchet Coupling



Dimensions p. 34

Slip clutch

	M200	●	●		

Using the slip clutch, two cam shafts can be coupled in such a way so that the secondary cam shaft will operate only after the primary cam shaft has been moved over a pre-determined angle. This slip clutch allows e. g. the de-energized changing back of switches for pole-changeable motors. Not available for D-switches.

Ratchet coupling

	M230		CA40 CA50 CA63 C26 C32		

A ratchet coupling attaches to the rear of the switch. Additional stages are then attached behind the coupling device which serves to operate that portion of the switch only when the handle is turned counterclockwise. When the handle is turned clockwise, the rear switch portion remains in the same position.

< back to table of contents >

Optional Extras	Code	For Switch Sizes S0	S1	S2	S3

Electromechanical Trip Device (Undervoltage Release)[1]



Dimensions p. 34

	Code	S0	S1	S2	S3
Operating voltage and frequency:					
AC/50 Hz	**V350/A**		●		
AC/60 Hz	**V350/B**		●		
AC/50/60 Hz	**V350/C**		●		
DC	**V350/D**		●		

The device includes a magnetic system which releases the switch to the trip position at voltage failure or undervoltage of 70 % of the nominal voltage. The device is trip-free, in that the switch can be operated only when the primary voltage is available. When using DC voltage, an economy resistor must be provided.
Switches with integrated undervoltage release are described on page 23.

Ordering data: Operating voltage and frequency for the magnetic system.

Electromechanical Trip Device (Shunt-trip)[1]



Dimensions p. 34

The device permits the switch to be turned to the trip position by remote control. The coil is designed for short-time duty requiring an auxiliary contact in the switch which de-energizes the coil in the trip position.

Controlling of the magnetic system:
24 V-440 V/50 Hz, 60 Hz or DC

	Code	S0	S1	S2	S3
	V360/A		●		

Ordering data: Operating voltage for the magnetic system.

Motor Drive[1]



Dimensions p. 35

The motor drive consists of an AC motor with capacitor, gear train and Geneva gear. This device allows switches to be operated from a remote location. Motor voltages available are 230 V, 50 Hz and 117 V, 60 Hz.
Possible control systems:
- Follow-up control
- Impulse control

Further information as well as special control systems upon request.

	Code	S0	S1	S2	S3
	R300		●	●	●

[1] Ambient temperature: 35 °C during 24 hours with peaks up to 40 °C.

< back to table of contents >


< back to table of contents >

Optional Extras

Key Lock device

	Code	For Switch Sizes S00	S0	S1	S2
 Dimensions p. 36	For 1 stage switches in PN enclosure	**V750/**	CA11 CA20		
	For 2 stage switches in PN enclosure		CA10- CA20		
 Dimensions p. 36	For 1 stage switches with plaster depth trim (With half-cylinder see page 19)		CA10		
 Dimensions p. 36	For base mounting with type of mounting VE21	**V750D/**	CA4 CG4 ●		
	For single hole mounting combined with 16/22 mm, protection IP 66/67/69k				
 Dimensions p. 36	Micromec lock	**V750D/5**			
	With front ring (mounting FS1)				
	Face plate 30 x 30 mm (mounting FS2)		●		
	Face plate 30 x 39 mm (mounting FS4)		●		
	Locking program in which the key can be removed:		●		
	A B E F C G R D				
 Dimensions p. 36	Lock 601	**V750D/2**[1]			
	With front ring (mounting FS1)				
	Face plate 30 x 30 mm (mounting FS2)		●		
	Face plate 30 x 39 mm (mounting FS4)		●		
	Locking program in which the key can be removed:		●		
	C G M H P D N J Q				
 Dimensions p. 36	For single hole mounting combined with 22 mm, protection 66/67/69k	**V750D/3**			
	With front ring (mounting FT1)		●		
	Face plate 48 x 48 mm (mounting FT2)		●		
	Face plate 64 x 64 mm (mounting FH3)		●		
	Face plate 48 x 59 mm (mounting FT6)		●		
	Face plate 64 x 78,5 mm (mounting FH4)		●		
	Locking program in which the key can be removed:				
	C G M H P K D N J Q S				
Ordering data:	Locking program of the key.				

[1] At high safety requirements use V750D/1.

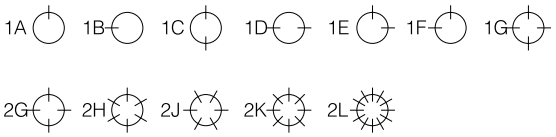Optional Extras		Code	For Switch Sizes S0	S1	S2	S3
Key-lock Device with Kaba Lock						
 Dimensions p. 37	For single hole mounting 25 mm					
	With front ring (mounting EL)	**V750D/**	●			
	For four hole panel mounting					
 Dimensions p. 37	Face plate 48 x 48 mm (mounting E)	**V750D/A**	●			
	Face plate 64 x 64 mm (mounting EG)	**V750D/A**	●			
	Face plate 48 x 60 mm (mounting E)	**V750D/B**	●			
	Face plate 64 x 78,8 mm (mounting EG)	**V750D/B**	●			
 Dimensions p. 37	For snap-on base mounting on track acc. to EN 50022	**V750D/**	●			
	With face plate for 45 mm knock-out (mounting VE2)					
	Locking program in which the key can be removed: 					
Ordering data:	Locking program of the key.					
Key-lock Device with Profile Cylinder						
 Dimensions p. 37	The key-lock device V750E with profile cylinder is furnished with a single hole mounting 22 mm for switches in size S0. The key can be removed in one switch position or for switches with 60° switching angle in up to six switch positions. The device with profile cylinder can be supplied with standard lock cylinders manufactured by CES, BKS or IKON.	**V750E**	●			

< back to table of contents >

Optional Extras	Code	For Switch Sizes S0	S1	S2	S3

Key-lock Device with Kaba Lock



Dimensions p. 38

For single hole mounting 40 mm

Face plate 64 x 64 mm (mounting EL2)
With front ring (mounting EL1)

Key can only be removed in the 12 o'clock position.
Central locking systems are available.

V750/A1 | ● | ●

Key-lock Device with Half-cylinder Lock



Dimensions p. 38

For switches with plaster depth trim

For 1 stage switches in standard flush mounting box
For multiple staged switches in special flush mounting box
Protection IP 42

The switch must have an arrested position in 12 o'clock. The key is only removable in the 12 o'clock position. The max. angular displacement is 2 x 135°.

V755.UE1 | BA20



Dust cap for key-lock device
Protection IP 43

S0D V755 12



Dimensions p. 38

For panel mounting
Protection IP 42

The key is removable in the 12 o'clock position. The max. angular displacement is 2 x 120°.
Protection IP 42

Additional programs with key removable in 2 positions are available on request.

V755.E | ●

< back to table of contents >

Optional Extras	Code	For Switch Sizes S0	S1	S2	S3

Safety-key-lock Device with separate Drive



Dimensions p. 38

With small cylinder lock

Square face plate	**V760/A.E**	●●	●		
Rectangular face plate	**V760/B.E**	●●	●		



Dimensions p. 38

With commercial half-cylinder lock

Square face plate	**V760/A**	●	●	●	●
Rectangular face plate	**V760/B**	●	●		



Dimensions p. 38

With half-cylinder lock

Square face plate	**V765**	●			



Dimensions p. 38

With dust cap
Protection IP 43

Various key positions and locking programs are available.
Key positions:
Key can be removed in locked and unlocked positions.
Key can be removed only in locked positions.
Locking programs:

Locking Program No.	Switching Angle	Switch Positions		Size
		To be locked	Not to be locked	
1	30°-90°	one	the balance	S0-S3
2	20°	all	none	S1, S3
	30°-90°			S0-S3
3	30°-90°	the balance	one	S1-S3
4[1]	30°-90°	one[1]	the balance[1]	S0-S3

[1]Locking program 4 permits the locking of the device in any switch position. However, the actual locking becomes effective in a pre-determined switch position only.

Ordering data: Advise locking program and positions in which the key can be removed.

< back to table of contents >

< back to table of contents >

Optional Extras	Code	For Switch Sizes				
		S00	S0	S1	S2	S3
Padlock Device						
 Dimensions p. 39 For 1 padlock with lock bow diameter for 4-5,5 mm. The handle may be supplied in black and red.	mm **V840K**	3,5-5 ●				
 Dimensions p. 39 The padlock is an integral part of the switch handle itself and can hold 2 padlocks. The lock bar is accessible from the bottom. Handle can be sealed in the locked and unlocked positions. The handle may be supplied in black, red and electro-gray.	mm **V840A/A** mm **V840A/C**		3,5-4,5 ● 3-4 ●	4-6 ●		
 Dimensions p. 39 For 1 padlock For mounting VE2 and VE21 with lock bar accessible from the front. Available in red and electro-gray.	mm **V840B**		4,5-6 ●			
 Dimensions p. 39 Up to 4 padlocks The lock bar is accessible from the front and may be supplied in black, red and electro-gray.	mm **V845**	3-7 ● ●	4-7,5 ● ●	4-8 ● ●	4-8,5 ●	
Spring loaded push rod Up to 4 padlocks	mm **V846**	4-7,5 ●	●			
Ordering data: Color variation.						

Optional Extras

Padlock Device

	Code	For Switch Sizes S00	S0	S1	S2	S3
 Dimensions p. 39						
Padlock device with integrated F- or B-handle The cover disc is available in black, yellow and electro-gray. The handle may be supplied in black, red and electro-gray.						
For 2 padlocks	mm	3-7				
	V840D	●	●			
 Dimensions p. 39						
For 3 padlocks With F-handle	mm				4-8	
	V840D				●	
For 3 padlocks With F-handle	mm			7-8		
	V840G		●	●		
For 3 padlocks With B-handle	mm			7-8		
	V840G/B		●	●		
 Dimensions p. 39						
For 4 padlocks With F-handle	mm			4-7		
	V840F/F		●	●		
For 4 padlocks With B-handle	mm			4-7		
	V840F/B		●	●		
 Dimensions p. 40						
For 2 padlocks For 3 padlocks For 6 padlocks Upon request, the device can be programmed to lock in several switch positions.	mm			3-5,5	4-7,5	4-7,5
	V850		●	●	●	
				●	●	●
 Dimensions p. 40						
Padlock device for C switches with base mounting for locking when control cabinet is opened. Padlock device with **simplified door clutch and single hole mounting** see page 8.	mm			3-8		
	V841		●	●	●	
 Dimensions p. 40						
	mm			3-8		
	V842		●	●	●	
Ordering data:	Color variation.					

< back to table of contents >

< back to table of contents >

Switch Type Variations	Suffix Code	For Switch Sizes S0	S1	S2	S3

PFR (Power Failure Release)[1]



Dimensions p. 40

Size S0

The magnetic system includes a low hum DC coil with incapsulated diode rectifier (blocking voltage 1000 V) = it, therefore, works independent of frequency. PFR switches are available with 24 V-600 V coils.
Available switching detents: 1 x 60° (60° to the right of center OFF), 2 x 60° (60° to the right and left of center OFF).

X — CA..

Alternatively with trip-free release
(Switching angle 1 x 60°)

Y — CA.. CG8



Dimensions p. 40

The PFR switch series is designed to provide protection for both machines and machine operators by preventing the equipment (which has been operating) from restarting automatically after a power failure.
The device includes a magnetic system which releases the switch (by means of a linear spring return mechanism) to the trip position at voltage failure or undervoltage of 70 % of the nominal voltage.

Size S1

Operating voltage for the magnetic system:
24 V-500 V/50 Hz
24 V-600 V/60 Hz

(Switching angle 1 x 60°)

X — A25 CA40 CA50 CA63 C26 C32 C42

Ordering data: Operating voltage for size S0 as well operating voltage and frequency for size S1 for the magnetic system.

Lockout-relay[1]



Dimensions p. 41

With manual release

M — CA10 CH.. — A11 A25 CA40 CA50 CA63 C26 C42

The lockout-relay is typically used to remotely switch electrical circuits from one power source to another.

The device contains a totally incapsulated coil and linear spring return mechanism which is compressed by manually turning the handle to the ON position (60° to the right of OFF). Once in the ON position, the handle is mechanically locked in place and cannot be manually turned back to OFF. When the coil is energized, however, the unit will automatically spring return to the OFF position.

A second version is available with push button manual release for test purposes.

Technical Data:

Voltage	Frequency	Power Consumption
24 - 28 V	AC 50 - 60 Hz, DC	135 VA
32 - 40 V	AC 50 - 60 Hz, DC	145 VA
42- 50 V	AC 50 - 60 Hz, DC	155 VA
60 V	AC 50 - 60 Hz, DC	165 VA
110 - 125 V	AC 50 - 60 Hz, DC	185 VA
220 - 240 V*	AC 50 - 60 Hz, DC	220 VA
380 - 440 V*	AC 50 - 60 Hz, DC	240 VA

* for DC on request



Dimensions p. 41

Without manual release



L — CA10 CH.. — A11 A25 CA40 CA50 CA63 C26

Ordering data: Operating voltage and frequency for the magnetic system.

[1]Ambient temperature: 35 °C during 24 hours with peaks up to 40 °C. [2]In preparation.

Optional Extras

Rectangular Add-on Face plates

	Code	For Switch Sizes S00	S0	S1	S2	S3
Add-on face plates for switches with single hole mounting and four hole panel mounting The face plates can be engraved or embossed from the front or alternatively from the back. Face plates in different height are also available. The face plate frame is black, the face plate brushed aluminum. For switch sizes S0, S1, S2 and S3 yellow face plates are also available.						
Add-on face plates with black face plate frame, face plates brushed aluminum						
Switches with single hole mounting 22 mm and front ring						
 For front inscription	F991/A0B/C-PRD	●	●			
For inscription on the back	F991/A0B-PRD	●	●			
 For front inscription	F991/A0B/C-PRB	●	●			
For inscription on the back	F991/A0B-PRB	●	●			
Dimensions p. 41						
Switches with single hole mounting or four hole panel mounting 22 mm and square face plate						
 For front inscription						
For inscription on the back	F991/A0B/C-PRC	●	●	●		
	F991/A0B-PRC	●	●	●		
 For front inscription						
For inscription on the back	F991/A0B/C-PRA	●	●	●	●	●
	F991/A0B-PRA	●	●	●	●	●
Face plates brushed aluminum						
Dimensions p. 41						
 For front inscription						
For inscription on the back	F991/A00/C-P2B	●	●	●		
	F991/A00-P2B	●	●	●		
 For front inscription						
For inscription on the back	F991/A00/C-P2A	●	●	●	●	●
	F991/A00-P2A	●	●	●	●	●
Ordering data: Color variation, if differing from the described version.						

< back to table of contents >

< back to table of contents >

Enclosures	Code	For Switch Sizes			
		S00	S0	S1	S2

Plastic Enclosures

Enclosure series protection IP 66/67, made of strong durable plastic, increased wiring space and cover coupling

KS and KL series
With high UV-resistance, Flammability Standard: UL94 V-0

CS and CL series
For applications in an aggressive environment, such as oil, chemical substances and grease

Each enclosure has 2 knock-outs on top and bottom for metric thread according to EN 50262. Standard equipment includes both a ground and neutral terminal. Size S0 enclosures are also available with lateral conduit knock-out and a cover interlock which allows for opening without dismantling the handle. They can also be supplied with a cover locked in 1 position. These enclosures are also available for conduit entries for PG-thread.



The following switch types can be mounted:

Switch type	Max. no. of stages
CA4	3
CG4	2
CG6	2

	KS3/CS3	M16			
Without cover interlock	**KS10/CS10**		M25		
	KS50/CS50		M20		
With cover interlock (the enclosure can only be opened at 9 o'clock position)	**KS11/CS11**		M25		
	KS51/CS51		M20		
With cover interlock (the enclosure can only be opened at 12 o'clock position)	**KS12/CS12**		M25		
	KS52/CS52		M20		



The following switch types can be mounted:

Switch type	Max. no. of stages
CA10	6
CA11, CA20	5
CA25, CG8, CH10-CHR16	4

Without cover interlock	**KL10/CL10**		M25		
	KL50/CL50		M20		
With cover interlock (the enclosure can only be opened at 9 o'clock position)	**KL11/CL11**		M25		
	KL51/CL51		M20		
With cover interlock (the enclosure can only be opened at 12 o'clock position)	**KL12/CL12**		M25		
	KL52/CL52		M20		



Dimensions p. 42

The following switch types can be mounted:

Switch type	Max. no. of stages
CA10	3
CA11	2
CA20, CA25, CG8	2
CH10-CHR16	2

Enclosures	Code	For Switch Sizes			
		S0	S1	S2	S3

Plastic Enclosures (Front Drive)



Protection IP 65

Conduit entries with metric ISO-thread

Code	S0	S1	S2	S3
PF1	M20	M20		
PF4		M25		

The following switch types can be mounted:

Switch type	Max. no. of stages
A11, A25	7
CA10, CA11, CA20, CA25, CA10B[1], CA11B, CA20B, CH10, CH16	4
CA40, CA50, CA63	6
C26, C42	4
C32	5



Protection IP 42

Conduit entries with metric ISO-thread

Code	S0	S1	S2	S3
PN1	M20	M20		
PN4		M25		

The following switch types can be mounted:

Switch type	Max. no. of stages
A11, A25	6
CA10, CA11, CA20, CA25, CA10B[1], CA11B, CA20B, CH10, CH16	4
CA40, CA50, CA63	6
C26, C32	4
C42	3



Dimensions p. 43

A lamp can be installed on request.

[1]Only for 4 stages.

< back to table of contents >

< back to table of contents >

Enclosures	Code	For Switch Sizes			
		S0	S1	S2	S3

Plastic Enclosures



Dimensions p. 44

	Code	S0	S1	S2	S3
Protection IP 44					
Conduit entries with metric ISO-thread	**PK1**	M25	M25		
Conduit entries without thread	**PK9**	●	●		

The following switch types can be mounted:

Switch type	Max. no. of stages
A11	12
CA10, CA10R	12
CA11, CA20, CAD11, CAD12	12
CA10B, CA11B, CA20B	12

Aluminum Enclosures



Dimensions p. 44

	Code	S0	S1	S2	S3
Protection IP 65					
Conduit entries with metric ISO-thread	**GK1**	M20	M20 M25		
Without conduit entries	**GK9**	●	●		


The following switch types can be mounted:

Switch type	Max. no. of stages
A11, A25	10
CA10, CA10R	3
CA11	2
CA20	2
CA10B	12
CA11B	10
CA20B	10
CA25B	9
CA40, CA50, CA63	10

Additional conduit entries on request.

Shaft Extension

L100, L100A, L105A

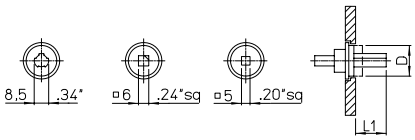

Free shaft length for


	E/EF	KN1/KD1	KD2	VE
S0	L1-2,3	L1-5,1	-	L1
S1	L1-2,5	-	L1-2,5	L1

Size	L1	L1	L1	L1	L1	L1	L1	L1	L1
S0	19	24	28	32	37	42	47	52	57
S1	19,8	23,8	27,8	32,8	37,8	42,8	47,8	52,8	57,8

	L1	L1	L1	L1	L1	L1	L1	L1	L1
S0	62	67	72	77	82	87	92	97	102
S1	62,8	67,8	72,8	77,8	82,8	87,8	92,8	97,8	102,8

Size	D
S0	13,8 .54
S1	18,5 .73


M004D, M004E



L = Shaft length
L1 = Free shaft length max.
[1] = Only for square shaft


Size	L[1]	L1[1]	L	L1	L	L1	L	L1	L	L1	D1	D2	A	SW
S0			60 2.36	40 1.57	80 3.15	60 2.36	100 3.94	80 3.15	120 4.72	100 3.94	6 .24	13,8 .54		12 .47
S1	56,5 2.22	20 .79	70 2.76	40 1.57	90 3.54	60 2.36	110 4.33	80 3.15	130 5.12	100 3.94	8,5 .34	18,5 .73	6 .24	16 .63
S2	70 2.76	40 1.57	100 3.94	70 2.76	130 5.12	100 3.94	160 6.30	130 5.12	190 7.48	160 6.30	11,2 .44	24,6 .97	8 .32	22 .87
S3	95 3.74	40 1.57	130 5.12	75 2.95	165 6.50	110 4.33	200 7.87	145 5.71	235 9.25	180 7.09	14 .55	35,1 1.38	10 .39	39 1.18

Simplified Door Clutch

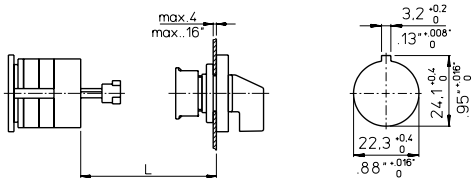


M295		L min.	L max.
M295/A	S0/S1	27 1.06	112 4.41
M295/B	S0/S1	25 .98	90 3.54

V840E

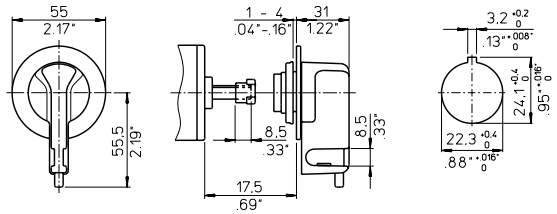


V840F/V840G




Size	L min.	L max.
S0	30 1.18	55 2.17
S1	28 1.10	55 2.17

V845

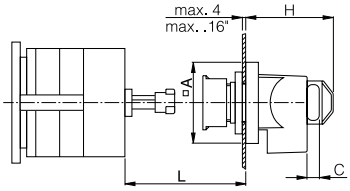

Size	A	C	H	L min.	L max.
S0	48 1.89	7,2 .28	52 2.05	30 1.18	55 2.17
S1	64 2.52	8,1 .32	58 2.28	28 1.10	55 2.17

M600

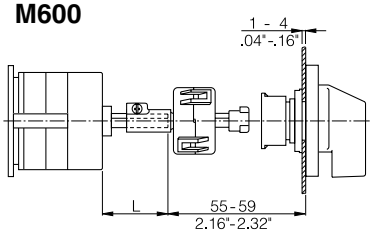

L see L100 and M004D above.

< back to table of contents >


Optional Extras

Dimensions mm / inch

Auxiliary Contacts


M510B

E mounting




Size	M	D
S1	16	64
S2	18,7	84
S3	17	128

VE mounting

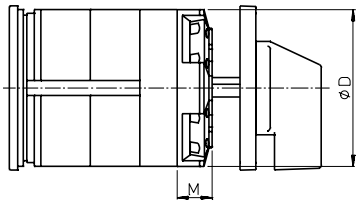


Size	M	D
S1	11,5	64
S2	11,7	84
S3	8	128


Control and Indicator Device (without Lamps)




S0 Q120/A1 - S0 Q120/A5
Q120 Turn to operate
C-, DH-switches




S0 Q120/A..A1 - S0 Q120/M..D5
Q120 Push-to-turn operation with a/c
C-, DH-switches




S0 Q120/A00Z1 - S0 Q120/Z00Z5
Q120 Push-to-turn operation without a/c
C-, DH-, DK-switches






With adaptor ring



Lamp
(LED recommended)

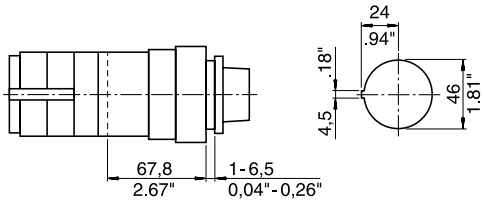



Q100/A


Face plate

51,8 x 51,8 mm


Q100B

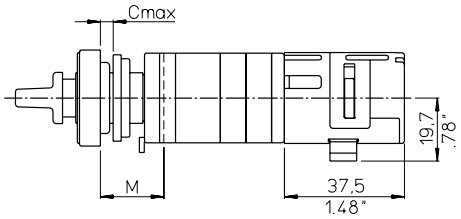







Without interlock
M = 17,7 C = 5
.70 .20




With interlock
M = 19,5 C = 6,5
.77 .26

Q100B *E

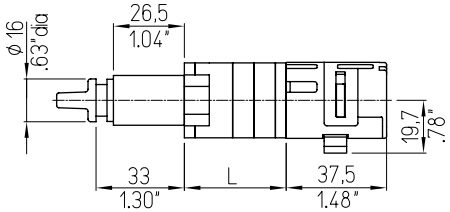




Standard Door Clutch

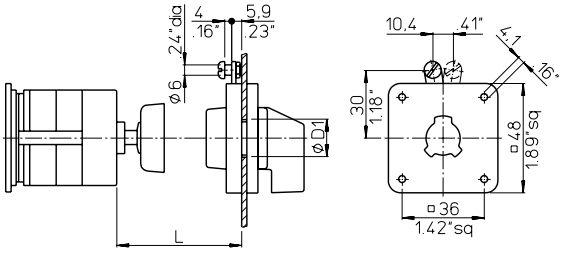


M280D, M280D/.EF, M280E, M280E/.EF

For switches of size S0

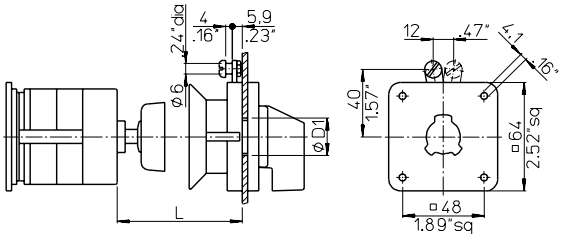

For switches of size S1 and S0 ●

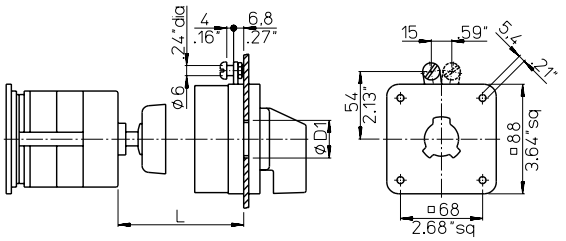


For switches of size S2 and S3


L = Shaft length

Size	L		L		L		L		D1
S0	36 1.42	55 2.17	56 2.20	75 2.95	76 2.99	95 3.74	96 3.78	116 4.57	19-22 .75-.87
S0 ●	36 1.42	55 2.17	56 2.20	75 2.95	76 2.99	95 3.74	96 3.78	116 4.57	19-22 .75-.87
S1	32 1.26	57 2.24	58 2.28	77 3.03	78 3.07	97 3.82	98 3.86	118 4.65	19-22 .75-.87
S2	60 2.36	90 3.54	90 3.54	120 4.72	120 4.72	150 5.91	150 5.91	180 7.09	26-30 1.02-1.18
S3	60 2.36	95 3.74	95 3.74	130 5.12	130 5.12	165 6.50	165 6.50	200 7.87	26-30 1.02-1.18


M700

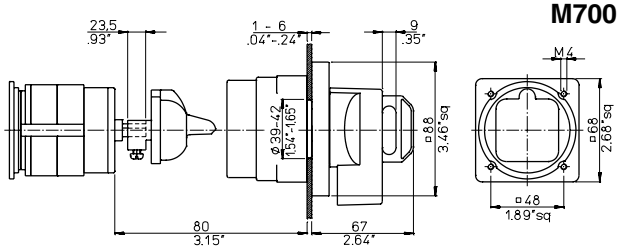


M701

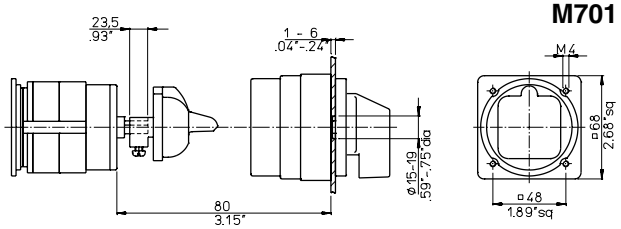

M800

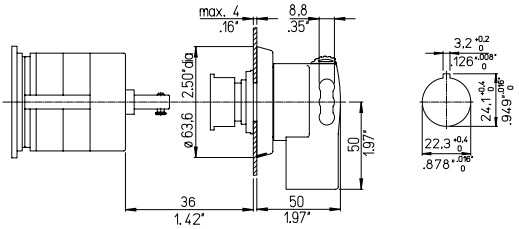

M810

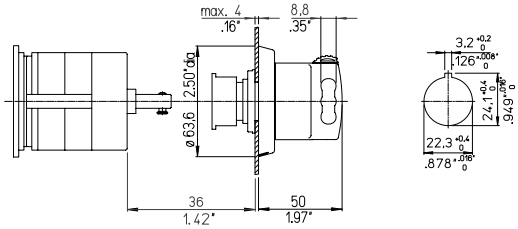


< back to table of contents >

Optional Extras — Dimensions mm / inch


Indicator Lamp Device

Q200/A1, Q200/A2, Q200/B1, Q200/B2


For switches of size S0

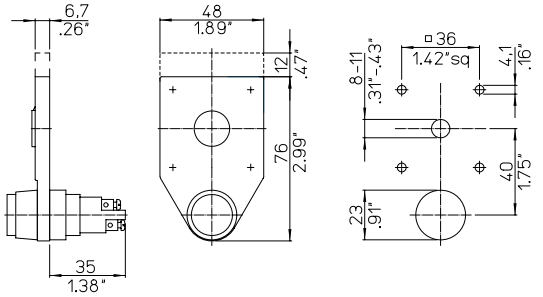


For switches of size S1

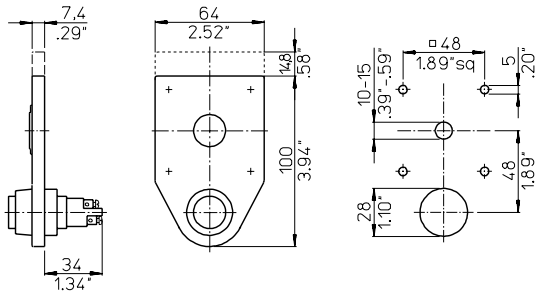

For switches of size S2

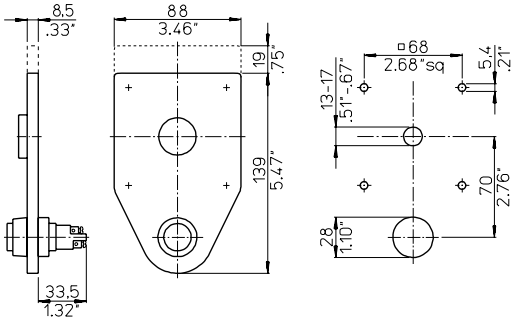


For switches of size S3

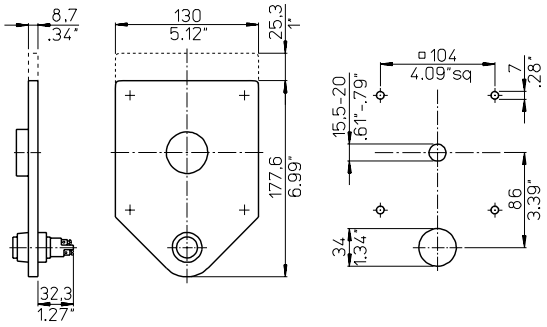


Stop and Go Device

V160



Spring Return over several Positions

M470/A, M470




Size	M470/A M	M470 M
S0 ●	33,3 1.31	33,3 1.31
S0[1] ●	40,3 1.59	29,2 1.15
S1[1]	33,3 1.31	22,2 .87
S2	75 2.95	

[1] shaft hole 18,5 mm/.73 inch


Push-pull Interlock

V110A, V115A, V130A, V135A

E, EG



FT2, FH3




M = Additional length of the switch

Mounting	E[1]		EG[2]		FT2		FH3	
	V110A V130A	V115A V135A	V110A V130A	V115A V135A	V110A V130A	V115A V135A	V110A V130A	V115A V135A
M w/o a/c	17,5 .69	33,5 1.32	24,5 .96	40,5 1.59	24,0 .94	40,0 1.57	31,0 1.22	47,0 1.85
M with a/c	33,5 1.32	33,5 1.32	40,5 1.59	40,5 1.59	40,0 1.57	40,0 1.57	47,0 1.85	47,0 1.85
S	1-2 .04-.08	1-2 .04-.08	1-2 .04-.08	1-2 .04-.08	1-6 .04-.24	1-6 .04-.24	1-6 .04-.24	1-6 .04-.24

[1]shaft hole 15-19 mm/.59-.75 inch
[2]shaft hole 19-22 mm/.75-.87 inch

V110, V115, V130, V135

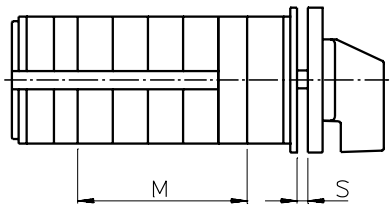


M = Additional length of the switch

Size	No. of auxiliary contacts 0-2 M	3 + 4 M	5 + 6 M	7 + 8 M	S
S1[1]	39,9 1.57	57,4 2.26	74,9 2.95	92,4 3.64	0-4 0-.16
S1	29,5 1.16	47 1.85	64,5 2.54	82 3.23	0-4 0-.16

[1]For switch type CA..B, CH..B, CG..B, DH..B

V110, V120, V130

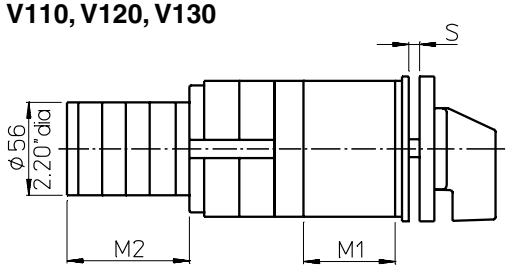


M1 = Additional length of the switch
M2 = Additional length of the auxiliary switch

Size	No. of auxiliary contacts 0 M1	1 + 2 M1+M2	3 + 4 M1+M2	5 + 6 M1+M2	7 + 8 M1+M2	S
S1[1]	51,7 2.04	101,4 3.99	120,4 4.74	139,4 5.49	158,4 6.24	0-4,5 0-.18
S2	69 2.72	127,6 5.02	146,6 5.77	165,6 6.52	184,6 7.27	0-5,5 0-.22
S3	85 3.35	151,6 5.96	170,5 6.71	189,5 7.46	208,5 8.21	0-7 0-.28

[1]Only for V120

Interlock between Switches and Tandem Drive


V600/B, V600/C, M300/B, M300/C, M300/D

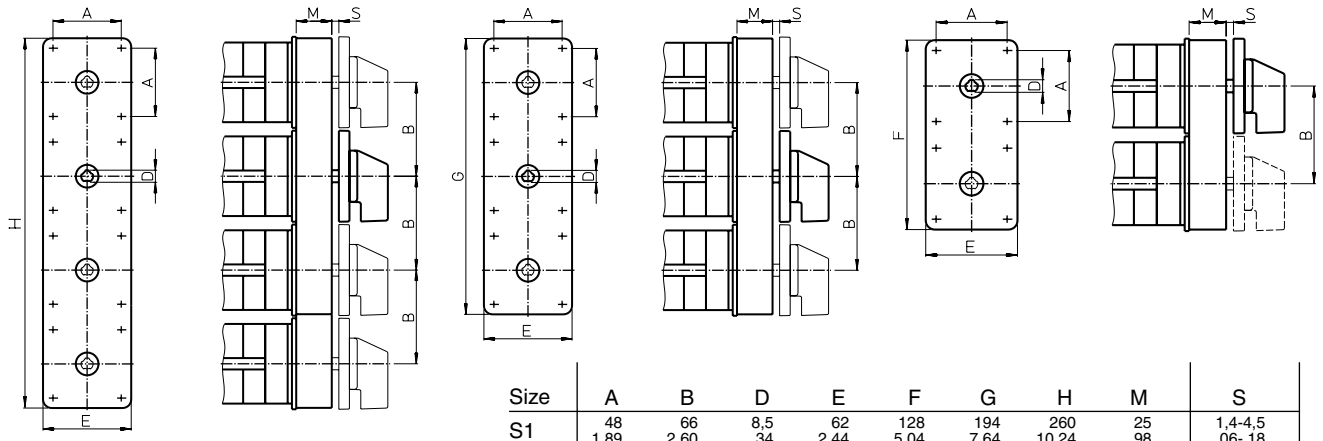

Size	A	B	D	E	F	G	H	M	S
S1	48 1.89	66 2.60	8,5 .34	62 2.44	128 5.04	194 7.64	260 10.24	25 .98	1,4-4,5 .06-.18
S2	68 2.68	93 3.66	11,2 .44	92 3.62	183 7.20	276 10.87	369 14.53	30 1.18	1,5-7,0 .06-.28
S3	88 3.46	144 5.67	14 .55	130 5.13	274 10.79	418 16.47	562 22.13	24 .94	1,5-8,3 .06-.33

< back to table of contents >

Push Button Interlock

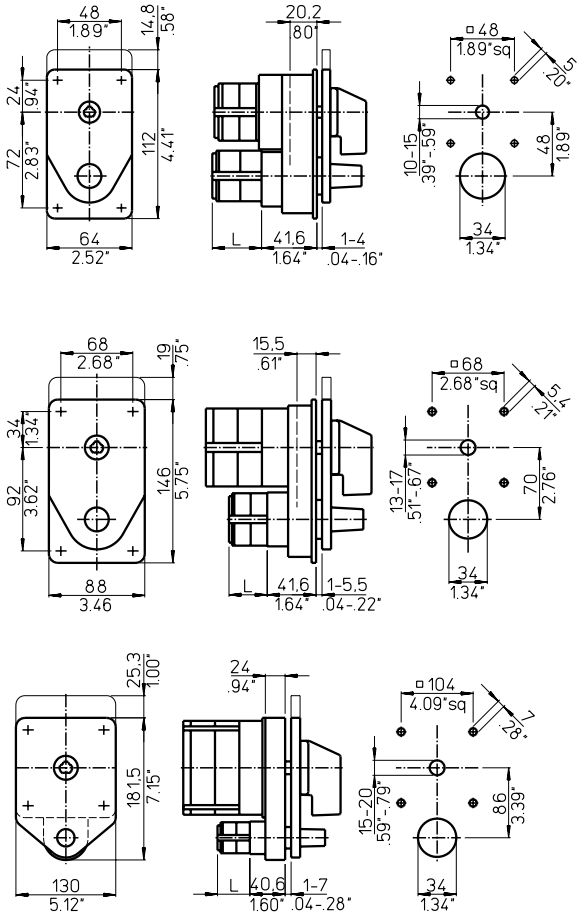

V400/A1, V400/A2, V400/B1, V400/B2


For switches of size S0 and S1

	No. of auxiliary contacts	
	2	4
L	21,7 .85	34,4 1.35

For switches of size S2

For switches of size S3

Electromechanical Interlock

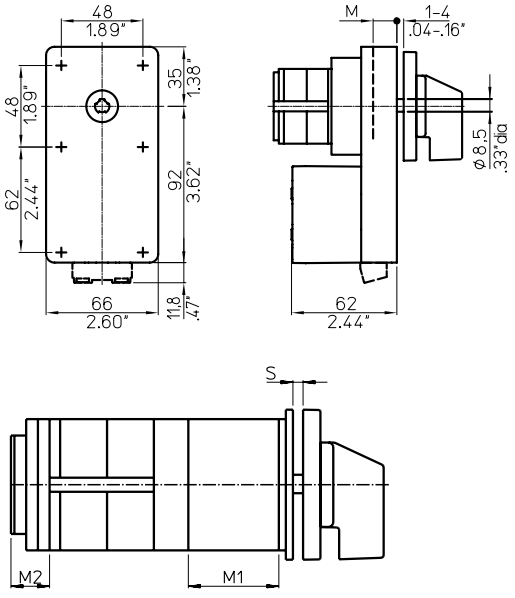

V140

For switches of size S1

	M
S1	13
CA40-63, A11, A25	35,2


For switches of size S1, S2 and S3

M1 = Additional length for the interlock
M2 = Additional length for the coupling pieces of the solenoid
Additional length for the solenoid upon request.

Size	M1 + M2	S
S1	56 2.20	0-4 0-.16
S2	102 4.02	0-5,5 0-.22
S3	111,1 4.37	0-7 0-.28

< back to table of contents >

Bayonet/Switch Coupling

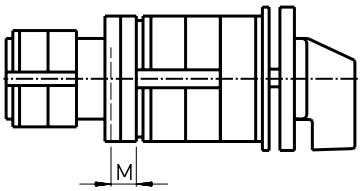


M270

	Coupled switch		
Size	S1	S2	S3
Main switch	M	M	M
S1	9,8 .39		
S2		12,9 .51	
S3			32,9 1.30

M275

	Coupled switch			
Size	S00	S0	S1	S2
Main switch	M	M	M	M
S0	0 0	5,5 .22		
S1	1,3 .05	0,8 .03		
S2	10,2 .40	4,4 .17	2,9 .11	
S3	12,7 .50	12,2 .48	11,4 .45	11,4 .45


Slip Clutch and Ratchet Coupling



M200, M230

M = One switch stage

Electromechanical Trip Device (Undervoltage Release and Shunt-trip)

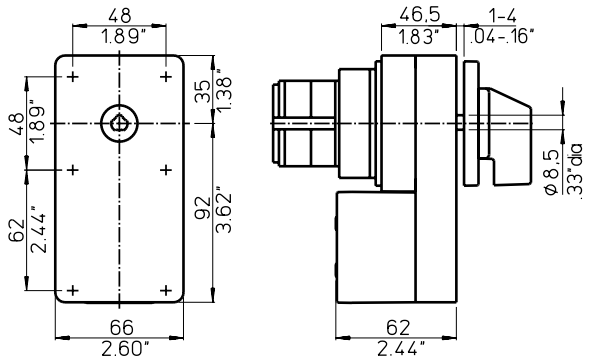

V350/A, V350/B, V350/D
V360/A, V360/B, V360/D


< back to table of contents >

Optional Extras


Dimensions mm / inch

Special Drive Units


G800/A

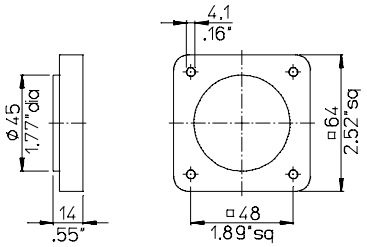


G800/B

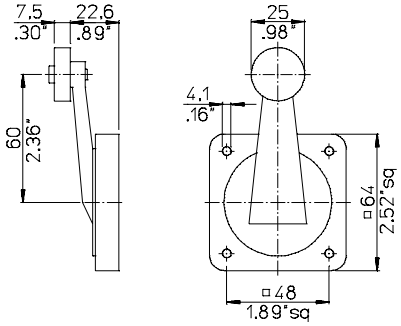

G800/C




G900/B

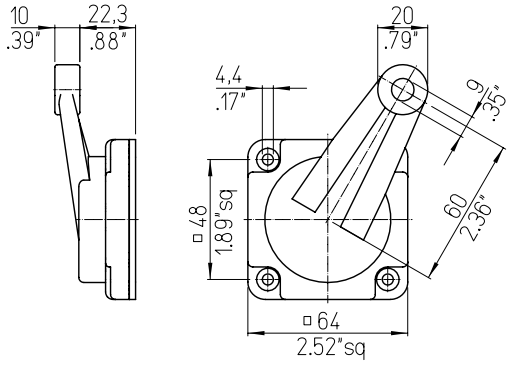


Ground and Neutral Terminal

H040/E, H040/N, H040/NE




Motor Drive

R300

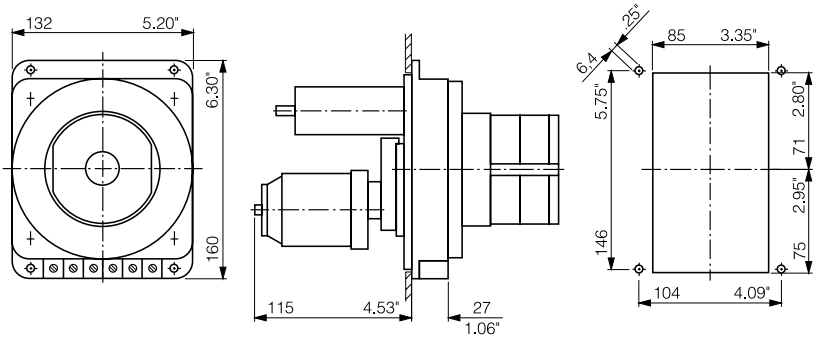


< back to table of contents >

Key-lock Device with small Cylinder Lock

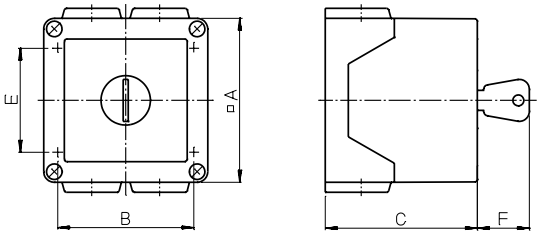


V750

Switch type	No. of stages	A	B	C	E	F	Conduit entries 4 x ISO
CA10	2	64 2.52	50 1.97	68,8 2.71	36 1.42	26 1.02	20
CA11, CA20	1 + 2	82 3.23	68 2.68	75,5 2.97	52 2.05	29 1.14	20

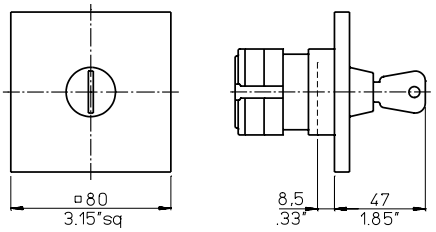


For 1 stage CA10 switches with plaster depth trim

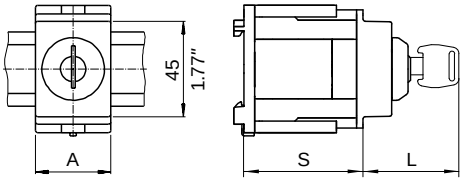

For base mounting with type of mounting VE21

Switch Type	A	L
CA4, CG4	35,57 1.40	45 1.77
CA10, CA11, CA20, CA25, CG8, CH10, DH10	52,3 2.06	56,6 1.73

Fl.	CA4	CG4	CA10		CA11		CA20		CA25		CG8		CH10		DH10	
	S	S	Smin	Smax	Smin	Smax	Smin	Smax	Smin	Smax	Smin	Smax	Smin	Smax	Smin	Smax
1	-	44 1.73	44 1.73	52 2.05	48 1.89	56 2.20	48 1.89	56 2.20	50 1.97	58 2.28	52 2.05	60 2.36	54 2.13	60 2.36	54 2.13	60 2.36
2	44 1.73	54 2.13	54 2.13	60 2.36	60 2.36	68 2.68	60 2.36	68 2.68	64 2.52	72 2.83	64 2.52	72 2.83	68 2.68	74 0.77	72 2.83	74 2.91
3	50 1.97	68 2.68	64 2.52	72 2.83	72 2.83	74 2.91	74 2.91	74 2.91	-	-	-	-	-	-	-	-
4	58 2.28	-	72 2.83	74 2.91	-	-	-	-	-	-	-	-	-	-	-	-
5	68 2.68	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

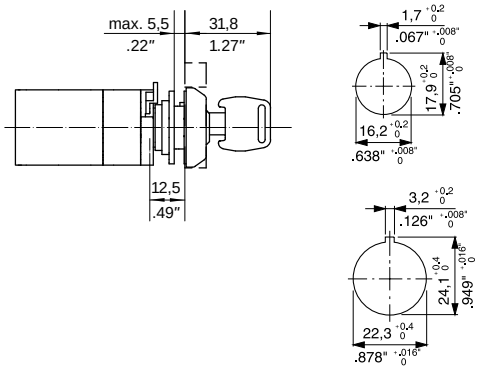


V750D/5 and V750D/2

For single hole mounting combined with 16/22 mm

Front ring 29,5 mm Ø (mounting FS1)

Face plates
30 x 30 mm (mounting FS2)
30 x 39 mm (mounting FS4)

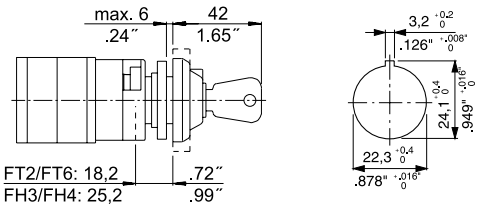

V750D/3


For single hole mounting 22 mm

Front ring 39 mm Ø (mounting FT1)

Face plate
48 x 48 mm (mounting FT2)
64 x 64 mm (mounting FH3)
48 x 59 mm (mounting FT6)
64 x 78,5 mm (mounting FH4)

< back to table of contents >


Key-lock Device with Kaba Lock

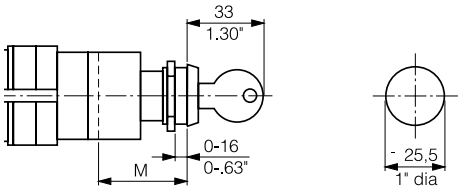

V750D

With front ring (mounting EL)

Locking program	M
1A-1G	37,2 1.46
2G-2L	47,2 1.86

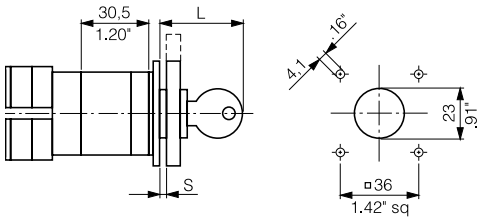


V750D/A, V750D/B

Face plates

48 x 48 mm (mounting E)

48 x 60 mm (mounting E)

Locking program	S	L
1A-1G	1-3,5 .04-.14	40,3 1.59
2G-2L	1-12,5 .04-.49	49,3 1.94

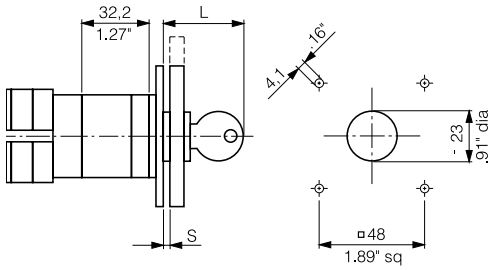


V750D/A, V750D/B

Face plates

64 x 64 mm (mounting EG)

64 x 78,8 mm (mounting EG)

Locking program	S	L
1A-1G	1-3,5 .04-.14	39,8 1.57
2G-2L	1-12,5 .04-.49	48,8 1.92




V750D (mounting VE2)


Max. no. of stages S =

	CA10	CA11	CA20	CG8	CH10
50 mm 1.97"	1	-	-	-	-
61 mm 2.40"	2	1	1	1	1
67 mm 2.64"	-	2	2	-	-
69 mm 2.72"	3	2	2	-	-

Key-lock Device with Profile Cylinder

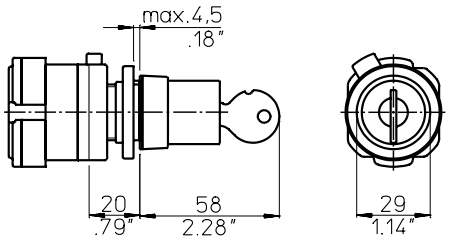

V750E




< back to table of contents >

Optional Extras

Dimensions mm / inch

Key-lock Device with Kaba Lock

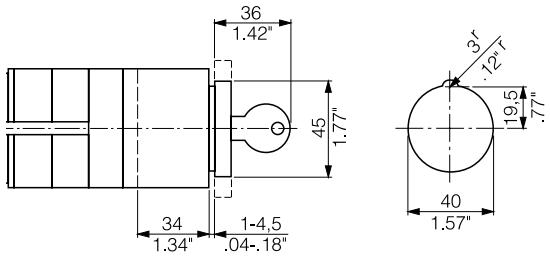


V750/A1


With face plate 64 x 64 mm (mounting EL2)
With front ring (mounting EL1)

Key-lock Device with Half-cylinder Lock


V755.UE1

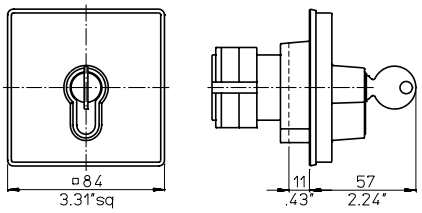

V755.E Different drilling plans

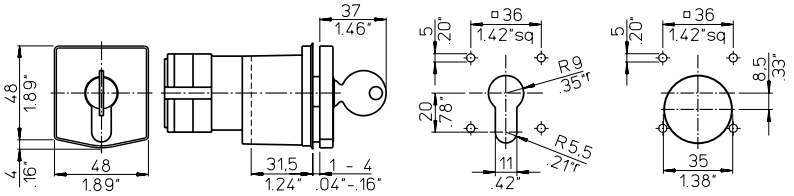

Safety Key-lock Device with separate Drive

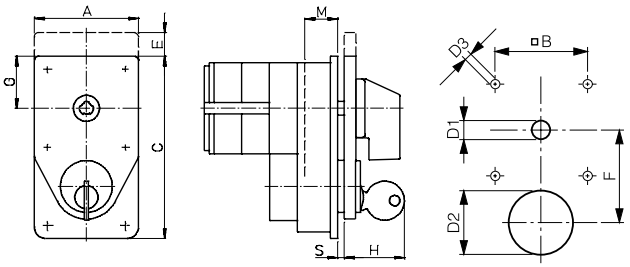


V760/A.E, V760/B.E, V760/A, V760/B


Size of the optional extra	A	B	C	E	F	G
S0	48 1.89	36 1.42	82 3.23	12 .47	40 1.57	24 .94
S1	64 2.52	48 1.89	112 4.41	14,8 .58	48 1.89	32 1.26
S2	88 3.46	68 2.68	146 5.75	– –	70 2.76	44 1.73
S3	130 5.12	104 4.09	181,5 7.15	– –	86 3.39	65 2.56

	H	D1	D2	D3	M	S
S0	31 1.22	8,5 .33	22-23 .87-.91	5 .20	9,5 .37	1-4 .04-.16
S1	34,5 1.36	10 .39	34 1.34	5 .20	20,2 .80	1-4 .04-.16
S2	35,5 1.40	12 .47	34 1.34	5,4 .21	15,5 .61	1-5,5 .04-.22
S3	36,5 1.44	15 .59	34 1.34	7 .28	24 .94	1-7 .04-.28


V765

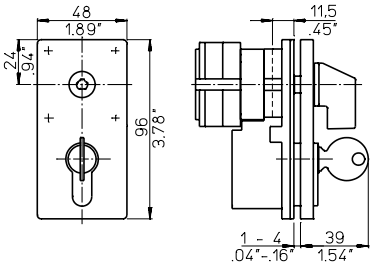

Different drilling plans

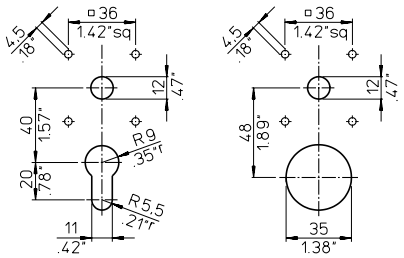

V790




< back to table of contents >

Optional Extras

Dimensions mm / inch

Padlock Device

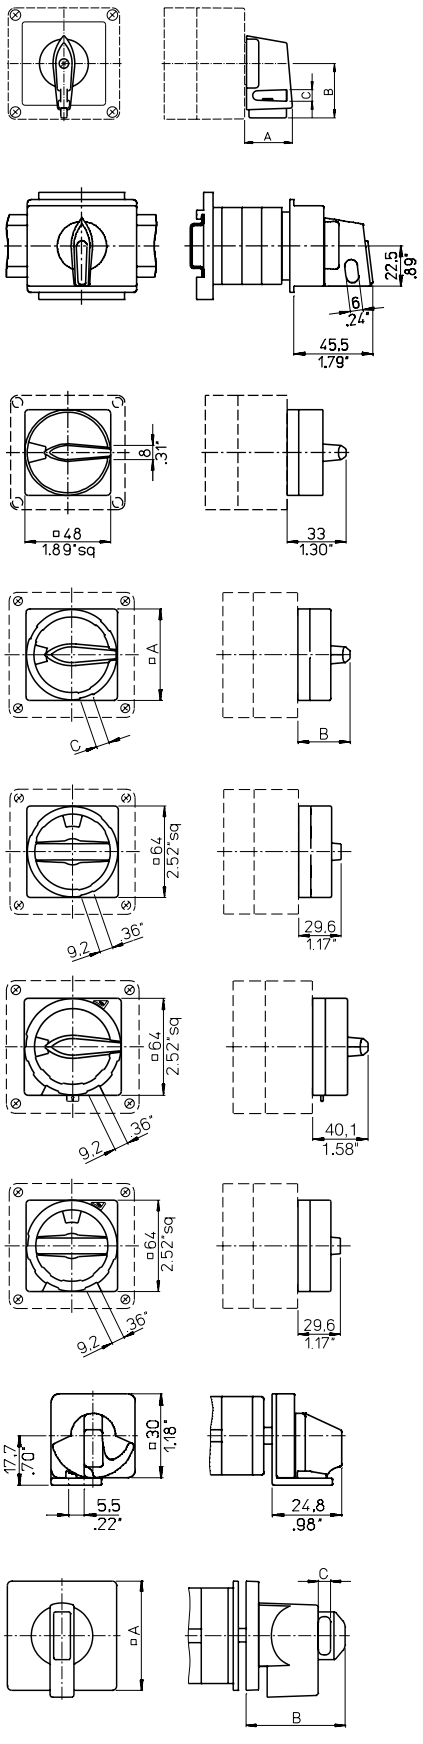

V840A

For 2 padlocks

Size	A	B	C
S0	27,7 1.07	31,5 1.24	5 .20
S1	35 1.38	40 1.57	7 .28

V840B

For 2 padlocks

V840D

For 2 padlocks

V840G, V840D

For 3 padlocks

	A	B	C
V840G	64 2.52	40,1 1.58	9,2 .36
V840D	88 3.46	49,3 1.94	10 .39

V840G/B

For 3 padlocks

V840F/F

For 4 padlocks

V840F/B

For 4 padlocks


V840K

For 1 padlock

V845, V846 (S1 only)

Size	A	B	C
S0	48 1.89	51 2.01	7,2 .28
S1	64 2.52	58 2.28	8,1 .32
S2	88 3.46	73 2.87	9 .35
S3	130 5.12	86,5 3.41	9,2 .36

Padlock Device

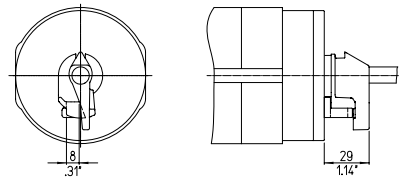


V841

V842


V850

For 2 padlocks

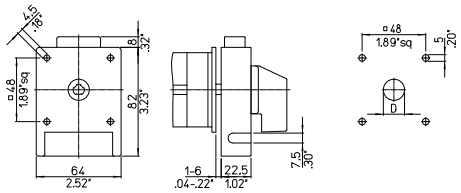


	D
S1 V850/A1	10-15/.39-.59
S1 V850/11	8-15/.31-.59
S1 V850/12	10-15/.39-.59
S1 V850/13	19-22/.75-.87

For 3 padlocks

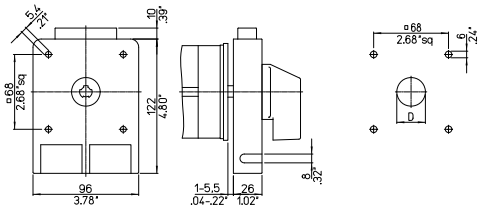


	D
S2 V850/A1	26-30/1.02-1.18
S2 V850/11	10-15/.39-.59
S2 V850/12	26-30/1.02-1.18
S2 V850/13	26-30/1.02-1.18

For 6 padlocks

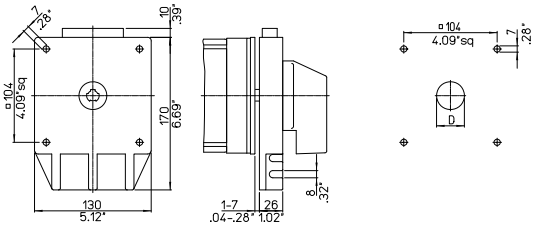

	D
S3 V850/A1	15.5-20/.61-.79
S3 V850/11	26-30/1.02-1.18
S3 V850/12	15.5-20/.61-.79
S3 V850/13	22-25/.87-.98


PFR (Power Failure Release)

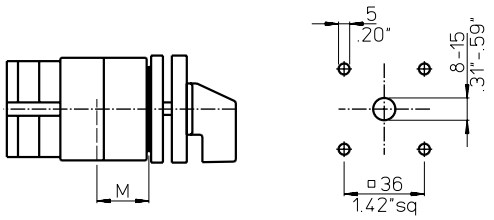

Size S0

Without trip-free release — M 23,3 .92

With trip-free release — 31,5 1.24

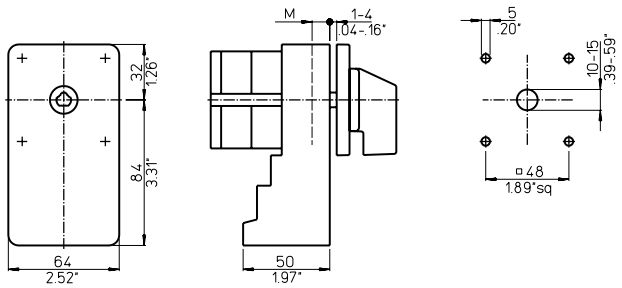


Size S1

	M
S1	10,2
CA40-63, A25	22,9


< back to table of contents >

Lockout-relays

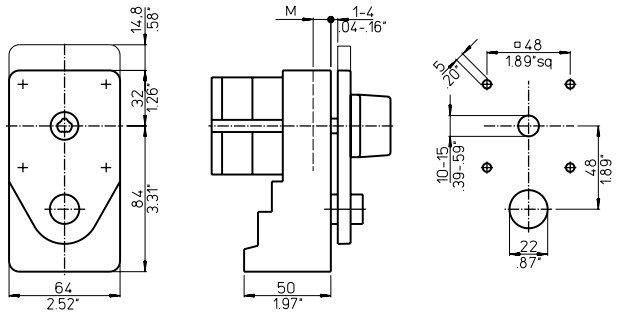

With manual release


	M
S0, S1	10,2
CA40-63, A25	22,9

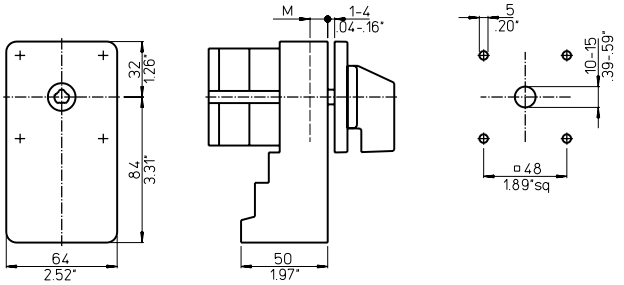


Without manual release

Rectangular Add-on Face Plates

PRA




PRB




F991/...-..., F991/.../C-...

	PRA					PRB	
	S00	S0	S1	S2	S3	S00	S0
A	29,5 1.16	47,8 1.88	63,8 2.51	87,8 3.46	129,8 5.11	29,5 1.16	47,8 1.88
B	35 1.38	48 1.89	60 2.36	80 3.15	115 4.53	35 1.38	48 1.89
C	4 .16	4 .16	5 .20	6 .24	7 .28	4 .16	4 .16
M	0,7 .03	0,7 .03	0,8 .03	1 .04	1,2 .05	0,7 .03	0,7 .03

PRC




PRD



	PRC			PRD	
	S00	S0	S1	S00	S0
A	29,5 1.16	47,8 1.88	63,8 2.51	29,5 1.16	47,8 1.88
B	25,5 .98	36 1.42	47 1.85	25,5 .98	36 1.42
C	4 .16	4 .16	5 .20	4 .16	4 .16
M	0,7 .03	0,7 .03	0,8 .03	0,7 .03	0,7 .03

< back to table of contents >


Plastic Enclosures

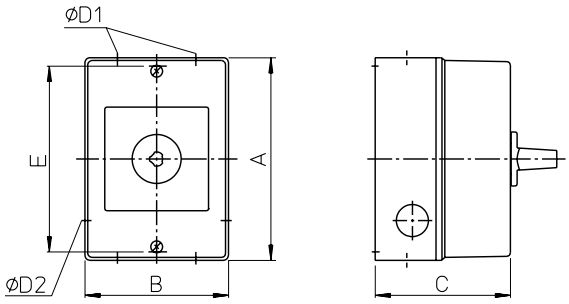


Mounting	Switch type	Max. no. of stages	A	B	C	Conduit entries 4 x D1	Conduit entries 2 x D2	E
KS3 CS3	CA4	2	90	70	60	16	-	82
	CG4	1	3.54	2.76	2.36	.63		3.23
	CA4	3						
	CG4	2	90	70	77	16	-	82
	CG6	2	3.54	2.76	3.03	.63		3.23
KS10, KS11, KS12 CS10, CS11, CS12	CA10	4						
	CA11	3						
	CA20, CA25, CG8	2	121	86	80	20/25	20	110
	CH10-CHR16	2	4.76	3.39	3.15	.79/.98	.79	4.33
KS50, KS51, KS52 CS50, CS51, CS52	CA10	6						
	CA11, CA20	5	121	86	106	20/25	20	110
	CA25, CG8, CH10-CHR16	4	4.76	3.39	4.17	.79/.98	.79	4.33
KL10, KL11, KL12 KL50, KL51, KL52 CL50, CL51, CL52 CL10, CL11, CL12	CA10	3						
	CA11, CA20, CA25, CG8	2	160	85	80	20/25	20	150
	CH10-CHR16	2	6.30	3.35	3.15	.79/.98	.79	5.91

< back to table of contents >


Plastic Enclosures (Front Drive)




For switch type
CA10



For switch type
CA11, CA20, CA10B, CA11B, CA20B, CH10, CH16, CA25



For switch type
A11, A14, CA40, CA50, CA63




Switch type	No. of stages	PN. C	PF. C	ISO
A11, A25	1-3	89	94,5	M25
	4-6	132	137,5	
CA10	1	36,6	41,3	M20
	2	45,8	50,8	
	3	55,3	60,3	
	4	64,8	69,8	
CA11, CA20, CA11B, CA20B	1 + 2	59,7	64,7	M20
CA11, CA20, CA10B, CA11B, CA20B	3 + 4[1]	85,1	90,1	M20
CH10, CH16	1	59,7	64,7	M20
	2 + 3	85,1	90,1	
	4	93	98	
CA25	1 + 2	59,7	64,7	M20
	3	85,1	90,1	
	4	93	98	
CA40, CA50, CA63	1-3	89	94,5	M25
	4-6	132	137,5	

[1]CA10B only for 4 stages


< back to table of contents >

Plastic Enclosures (Lateral Drive)

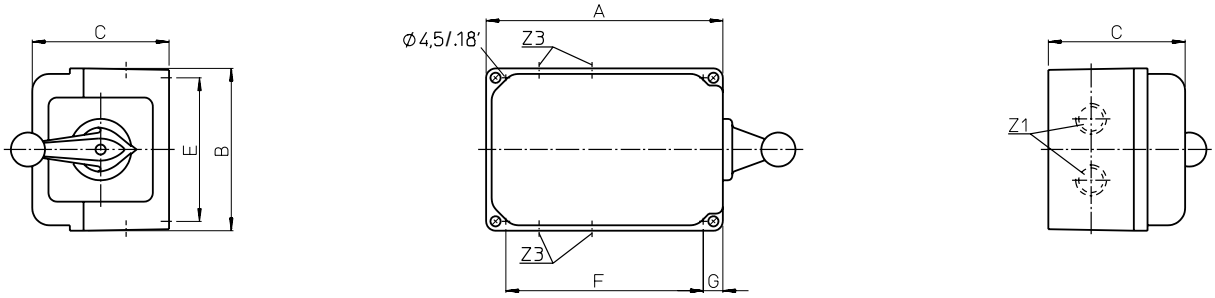

Switch type	Max. no. of stages	A	B	C	E	F	G	Conduit entries Z1	Z3	ISO
CA10, CA10R, CAD11, CAD12, CA10B A11, CA11, CA20, CA11B, CA20B	4 3	92 3.62	90 3.54	75 2.95	80 3.15	68 2.68	12 .47	●	-	M25
CA10, CA10R, CAD11, CAD12 CA10B A11, CA11, CA20, CA11B, CA20B	7 6 5	115 4.53	90 3.54	75 2.95	80 3.15	91 3.58	12 .47	-	●	M25
CA10, CA10R, CAD11, CAD12 CA10B A11, CA11, CA20, CA11B, CA20B	10 9 7	140 5.51	90 3.54	75 2.95	80 3.15	116 4.57	12 .47	-	●	M25
CA10, CA10R, CAD11, CAD12, CA10B A11, CA11, CA20, CA11B, CA20B	12 9	165 6.50	90 3.54	75 2.95	80 3.15	141 5.55	12 .47	-	●	M25
A11, CA11, CA20, CA11B, CA20B	11	190 7.48	90 3.54	75 2.95	80 3.15	166 6.54	12 .47	-	●	M25
A11, CA11, CA20, CA11B, CA20B	12	215 8.46	90 3.54	75 2.95	80 3.15	191 7.52	12 .47	-	●	M25

Aluminum Enclosures

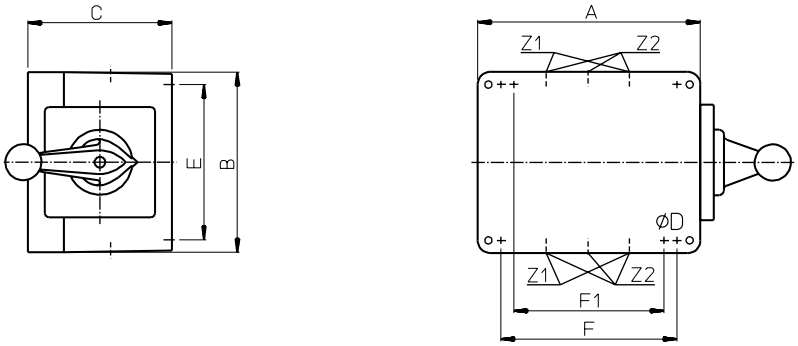

Switch types	No. of stages	A	B	C	D	E	F	F1	Conduit entries Z1	Z2	ISO
CA10, CA10R CA11, CA20	3 2	80 3.15	75 2.95	57 2.24	4,8 .19	63 2.48	-	52 2.05	●	-	M20
CA10B CA11B, CA20B CA25B	4 3 2	100 3.94	100 3.94	80 3.15	4.8 .19	86 3.39	66 2.60	-	●	-	M20
A11, A14 CA10B CA11B CA20B, CA25B CA40, CA50, CA63	5 7 6 5 5	140 5.51	140 5.51	90 3.54	7 .28	120 4.72	93 3.66	-	●	-	M25
A11, A14 CA10B CA11B, CA20B CA25B CA40, CA50, CA63	10 12 10 9 10	200 7.87	140 5.51	90 3.54	7 .28	93 3.66	180 7.09	-	-	●	M25

< back to table of contents >

Notes:

The Range of “Blue Line” Switchgear

Technical literature covering the following products is available on request.

	Catalog Number
Main Switches and Main Switches with Emergency Function 16 A-315 A **Maintenance Switches 20 A-315 A** **Switch Disconnectors 20 A-315 A** According to IEC 60947-3, EN 60947-3, VDE 0660 part 107, IEC 60204, EN 60204 and VDE 0113	**500**
C, CA and CAD Switches 10 A-315 A and L Switches 350 A-2400 A C, CA and CAD switches are designed for universal application. They are recommended for instrument, isolator, double-throw and motor control. L switches are designed for load and off-load applications. They are used to switch resistive or low inductive loads.	**100**
Optional Extras and Enclosures The complete product line, a large number of optional extras is available, including door interlocks, push-pull devices, cylinder and padlock attachments, control and indicator devices, AC motor drives, as well as enclosures, both insulated and metal.	**101**
A and AD Switches 6 A-25 A A and AD switches have 4 contacts in each switching stage. These switches provide an extensive range of switch functions and require a minimum mounting depth. Up to 24 switching positions are possible, with availability of 48 contacts per 12 stage switch column.	**110**
CG, CH and CHR Switches 10 A-25 A Ultra compact CG, CH and CHR switches are ideally suited for control and instrumentation applications. Switch terminals are “finger-proof” and conveniently accessible for wiring and are delivered open. All CG4 switches offer specially designed gold plated contacts or H-bridges with “cross-wire” contact systems, which facilitates their use in electronic circuitry and chemically aggressive environments.	**120**
DH, DHR, DK and DKR Switches 6 A-16 A DH, DHR, DK and DKR switches incorporate unique corrosion resistant contacts that permit operation on system voltage as low as 1 V. They have fully enclosed and protected contacts which can be operated either by rotary and/or lateral handle movement. D switches are used in calibration and semiconductor circuits. They are also used for relay and contactor control.	**130**
X Switches 200 A-630 A X switches can be applied for load, tap and gang switching duties. They incorporate 6 contacts in each switching stage. Their compact design provides a minimum length dimension for mounting purposes.	**140**
KG Switches 20 A-315 A and KH and KHR Switches 16 A-80 A KG, KH and KHR switches are excellent circuit interruptors. They have high through fault and fault making capacities and are especially designed for use as isolators and safety switches for machine tools, distribution panels and switchboards. KG ON/OFF switches offer unusually high dimensioned air and creepage distances between terminals which are designed for time saving “straight-line” wiring. ON/OFF switches are available with up to 8 poles and double-throw switches are available with up to 4 poles.	**150**
Push Buttons and Pilot Lights, 22,5 mm Ø A complete range of state-of-the-art push buttons and pilot lights represent an ideal combination of functional security and economical efficiency in a modular design.	**302**

We reserve the right to make technical and dimensional changes without prior notice.

SALES AND SERVICE ORGANIZATION

Australia
Kraus & Naimer Pty. Ltd.
379 Liverpool Road, ASHFIELD, N.S.W. 2131
P: 1800 567 948
E: sales-au@krausnaimer.com

Austria
Kraus & Naimer GmbH
Schumanngasse 39
1180 WIEN
P: +43 1 404 06 0
E: sales-at@krausnaimer.com

Belgium, Luxembourg
Kraus & Naimer B.V.
Ikaros Business Park
Ikaroslaan 2
1930 ZAVENTHEM
P: +32 2 757 0141
F: +32 2 757 1640
E: sales-be@krausnaimer.com

Brazil
Central and South America
Kraus & Naimer Ind. Com. Ltda.
Rua Santa Monica, 1061
Parque Industrial San Jose
P: +55 11 2198 1288
F: +55 11 2198 1251
E: knbrasil@krausnaimer.com.br

Canada
Kraus & Naimer Ltd.
219 Connie Crescent, Unit 13A
CONCORD, Ontario, L4K 1L4
P: +1 905 738 1666
E: sales-ca@krausnaimer.com

Cyprus
ELECTROMATIC CONSTRUCTIONS LTD.
72, Evagoras Pallikarides Str., 2235 LATSIA-Nicosia
P. O. Box 12630, 2251 LATSIA-Nicosia
P: +357 2 48 41 41
F: +357 2 48 57 47
E: electromatic@cytanet.com.cy

Czech Republic
OBZOR, výrobní družstvo Zlín
Na Slanici 378
763 02 ZLÍN
P: +420 577 195 150
F: +420 577 195 152
E: odbyt@obzor.cz

Denmark
THIIM A/S
Transformervej 31
2860 SOEBORG
P: +45 4485 8000
F: +45 4485 8005
E: thiim@thiim.com

Finland
Kraus & Naimer Oy
Kiitoradankuja 8
01530 VANTAA
P: +358 9 825 424 0
E: sales-fi@krausnaimer.com

France
Kraus & Naimer s.a.s.
33, rue Bobillot
75013 PARIS
P: +33 1 58 40 80 80
E: sales-fr@krausnaimer.com

Germany
Kraus & Naimer GmbH
Wikingerstraße 20-28, 76189 KARLSRUHE
Postfach 10 01 24, 76231 KARLSRUHE
P: +49 721 59 88 0
E: sales-de@krausnaimer.com

Great Britain
Kraus & Naimer Ltd.
115 London Road
NEWBURY/BERKSHIRE RG14 2AH
P: +44 1635 262626
F: +44 1635 37807
E: sales-uk@krausnaimer.com

Greece
KALAMARAKIS-SAPOUNAS S. A.
Ionias & Neromilou Str., P. O. Box 46566
13671 ACHARNES/ATHENS
P: +30 2 10 240 6000 6
F: +30 2 10 240 6007
E: kalamarakis.sapounas@ksa.gr

Hungary
GANZ KK KFT.
X. Kőbányal út 41/c, Postfach 87
1475 BUDAPEST
P: +36 1 261 5479
E: ganzkk@ganzkk.hu

Iceland
JOHAN RÖNNING LTD.
Klettagarðar 25
104 REYKJAVIK
P: +354 5200 800
E: ronning@ronning.is

Republic of Ireland
Kraus & Naimer Ltd.
4235 Atlantic Avenue
Westpark Business Campus
Shannon, Co. Clare
P: +353 61 704700
F: +353 61 471084
E: sales-ie@krausnaimer.com

Italy
Kraus & Naimer s.r.l.
Via Terracini, 9
24047 TREVIGLIO (BG)
P: +39 0363 30 11 12
E: sales-it@krausnaimer.com

Japan
Kraus & Naimer Ltd.
Yoshiwada Building 2F
1-11-6 Hamamatsucho
Minato-Ku, TOKYO 105-0013
P: +81 3 3436 6151
F: +81 3 3436 6325
E: sales-jp@krausnaimer.com

Mexico
JC INGENIERÍA Y CONTROL, SA DE CV.
Ángel Gaviño 30.
C. Satélite, C. Medicos,
Naucalpan Edo. de Mexico, C.P. 53100
P: +52 55 55 62 75 77
F: +52 55 55 62 04 34
E: ventas@jcingenieriaycontrol.com

Netherlands
Kraus & Naimer B.V.
Wegtersweg 38-40, Postbus 199
7556 BR HENGELO (Ov.)
P: +31 74 291 9441
F: +31 74 291 98380
E: sales-nl@krausnaimer.com

New Zealand
Kraus & Naimer Ltd.
42 Miramar Avenue, WELLINGTON 6022
P. O. Box 15-009, WELLINGTON 6243
P: + 64 0800 736 522
E: sales-nz@krausnaimer.com

Norway
Kraus & Naimer AB Avd. Norge
Postboks 27 Vollebekk
0516 Oslo
P: +47 22 64 44 20
E: sales-no@krausnaimer.com

Poland
ASTAT LOGISTYKA SP. Z O.O.
Dąbrowskiego 441
60451 POZNAŃ
P: +48 61 849 80 89
E: k.swiderski@astat.pl

Portugal
ELECTRICOL-DAMAS, FERREIRA & DAMASCENO, LDA.
Apartado 1063, S. Ant. Cavaleiros
2670 LOURES
P: +351 21 989 8939
F: +351 21 988 6464
E: electricol@electricol.pt

Singapore, India, Middle East – UAE
Kraus & Naimer Pte. Ltd.
115A, Commonwealth Drive
#03-17/23
SINGAPORE 149 596
P: +65 6473 8166
E: sales-sg@krausnaimer.com

Slovenia
SCHRACK TECHNIK D.O.O.
Pameče 175
SI-2380 SLOVENJ GRADEC
P: +386 2 88 392 00
F: +386 2 88 434 71
E: d.goljat@schrack.si

Republic of South Africa
Kraus & Naimer Pty. Ltd.
7 Village Crescent, Linbro Village
Linbro Business Park, SANDTON 2065
P. O. Box 511, KELVIN 2054
P: +27 11 608 6060
E: sales-za@krausnaimer.com

Spain
Kraus & Naimer B.V.
P: +34 662 696 014
E: sales-es@krausnaimer.com

Sweden
Kraus & Naimer AB
Dr. Widerströms Gata 11, Hägersten
Box 42097, 126 14 STOCKHOLM
P: +46 8 97 00 80
E: sales-se@krausnaimer.com

Switzerland
AWAG Elektrotechnik AG
Sandbüelstraße 2
CH-8604 VOLKETSWIL
P: +41 44 908 19 19
E: info@awag.ch

Turkey
KARDES ELEKTRIK SANAYI VE TICARET A.S.
Yassioren Mah. Hifa Sok. No: 4
34277 Arnavutkoy-Istanbul-Turkey
P: +90 212 624 92 04 118
F: +90 212 592 48 10
E: info@unalkardes.com.tr

USA
Kraus & Naimer Inc.
760 New Brunswick Road
SOMERSET, NJ 08873
P: +1 732 560 1240
E: sales-us@krausnaimer.com

Kraus & Naimer

Contact us:

www.krausnaimer.com