Satisfy Professional's Needs

XGT

Makita®

Cordless Circular Saw
HS012G 165 mm (6-1/2")

XGT 40V max Li-ion



Max Cutting capacity

57 mm

Bevel angle: 0°

Work amount on a full battery charge BL4025

approx 110 cuts.

Test material: 50mm x 300mm Melapi

Lightweight


at 3.2 kg

with BL4025

BL MOTOR AWS BRAKE XPT

Excellent combination of high power and lightweight design

Compact design

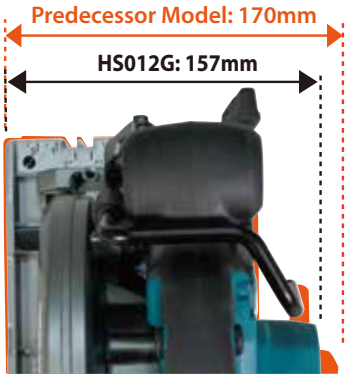

Tool hanger





Metal guide for cutting line



Magnesium diecast
Base plate, Safety cover and Blade case

Electric brake

eXtreme Protection Technology

Bevel range



Positive bevel stop
(at 22.5°and 45°)
(0° - right: 50°)

Twin LED Job light



with preglow and afterglow functions

Large lock-off lever



Auto-start Wireless System



connects to compatible vacuum cleaners via Bluetooth.

Accessories


Specialized EFFICUT blade



Size (mm)	Part No.
165x 1.4 x 20 x 25T	B-63018


Guide rail adapter, Guide rail and Guide rail bag

Guide rail adapter
Part No. 196953-0



Overall length (m)	Guide rail Part No.	Guide rail bag Part No.
1	199140-0	E-05670
1.4	194368-5	E-05664
1.5	199141-8	
1.9	194925-9	E-10920
3	194367-7	E-10936

Clamp set






Part No. type A: 194385-5
type B: 199826-6

Bevel guide set

Adjustable angle of Guide rail






Part No. 196664-7

Guide rail Joint connector 2pc set





Part No. 198884-9
198885-7(EU)

Charging Time

40V max Li-ion	Fast Charging DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min
BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Circular Saw

HS012G 165 mm (6-1/2")

- Brake
- Constant Speed
- Soft Start
- Dust Collection
- Built-in Job Light
- Carrying Case

Wheel Diameter	*165 mm (6-1/2")*
Hole Diameter	*20 mm (13/16")*
Max Cutting Capacity	*0°: 57 mm (2-1/4")*
	45°: 41 mm (1-5/8")
No Load Speed (RPM)	*5,200*
Vibration Level	*2.5 m/s² or less*
Sound Pressure Level	*91 dB(A)*
Sound Power Level	*102 dB(A)*
Dimensions (L x W x H)	*wo/ Battery: 298 x 157 x 246 mm (11-3/4 x 6-3/16 x 9-11/16")*
	w/ BL4020 / BL4025: 352 x 157 x 246 mm (13-7/8 x 6-3/16 x 9-11/16")
	w/ BL4040: 359 x 157 x 246 mm (14-9/64 x 6-3/16 x 9-11/16")
	w/ BL4050F: 388 x 157 x 246 mm (15-1/4 x 6-3/16 x 9-11/16")
	w/ BL4080F: 406 x 157 x 246 mm (16 x 6-3/16 x 9-11/16")
Net weight	*3.2 - 4.4 kg (7.1 - 9.7 lbs.)*

Standard Equipment : TCT saw blade, Hex wrench, Dust nozzle, Guide rule (country-specific), Battery , Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation
3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202301