Compact overall length

Model	DF332D	DF032D	HP332D
Length	154mm	124mm	168mm



BL MOTOR

Mechanical 2-speed transmission
High rotational speed
1st (Low)/ 0-450 min^{-1}, 2nd (High)/ 0-1,500 min^{-1}



Best possible ergonomic handle for driver-drill applications



A In order to provide maximum thrust to the bit, the top back of the handle is ergonomically contoured and widened according to the U-shape formed between user's thumb and index finger.

B Ribbed rubber grip enables all finger tips to hold the handle securely against the strong rotational force of counter torque even in single-handed operation.

10.8V CXT



BL1015
10.8V 1.5Ah

BL1020B
10.8V 2.0Ah
with Battery fuel gauge

BL1040B
10.8V 4.0Ah
with Battery fuel gauge


DF032D


HP332D

Cordless Driver Drill DF332D / DF032D 10mm (3/8")

Torque Setting 20
Brake
Mechanical 2-Speed
Variable Speed
Reversing
Built-in Job Light
Carrying Case

	DF332D	DF032D
Capacity	*Steel : 10mm (3/8")*	*Steel : 10mm (3/8")*
	Wood : 28mm (1-1/8")	*Wood : 28mm (1-1/8")*
No load speed (rpm)	*Hi : 0-1,500*	*Hi : 0-1,500*
	Lo : 0-450	*Lo : 0-450*
Max tightening torque	*Hard / Soft : 35 / 21N·m*	*Hard / Soft : 35 / 21N·m*
Max lock torque	*32N·m (280in·lbs)*	*32N·m (280in·lbs)*
Dimensions (L x W x H)	*154x66x217mm*	*124x66x217mm*
	(6-1/6"x2-5/8"x8-1/2")	*(4-7/8"x2-5/8"x8-1/2")*
Net weight*	*1.0kg (2.3lbs) with BL1020B*	*0.88kg (1.9lbs) with BL1020B*
	1.2kg (2.6lbs) with BL1040B	*1.0kg (2.3lbs) with BL1040B*

Standard Equipment : Battery, Charger, Battery cover, Belt clip, Phillips bit

Cordless Hammer Driver Drill HP332D 10mm (3/8")

Torque Setting 20
Brake
Mechanical 2-Speed
Variable Speed
Reversing
Built-in Job Light
Carrying Case

	HP332D
Capacity	*Steel : 10mm (3/8")*
	Wood : 28mm (1-1/8")
	Masonry : 8mm (5/16")
Impacts per minute (ipm)	*Hi : 0-22,500*
	Lo : 0-6,750
No load speed (rpm)	*Hi : 0-1,500*
	Lo : 0-450
Max tightening torque	*Hard / Soft : 35 / 21N·m*
Max lock torque	*32N·m (280in·lbs)*
Dimensions (L x W x H)	*168x66x217mm*
	(6-5/8"x2-5/8"x8-1/2")
Net weight*	*1.1kg (2.4lbs) with BL1020B*
	1.3kg (2.8lbs) with BL1040B

Standard Equipment :
Battery, Charger, Battery cover, Belt clip, Phillips bit

**weight according to EPTA-Procedure 01/2003*

Items of standard equipment and specifications may vary by country or area.

Makita Corporation
3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201601

Satisfy Professional's Needs

Makita

Cordless Driver Drill
Cordless Hammer Driver Drill

CXT

10.8V LITHIUM-ION

BL MOTOR

Max lock torque 32 N·m

Light weight 0.88kg
DF032D
(with BL1020B)

Photo : HP332D

Extremely Compact and Lightweight

Powered by Slide Li-ion Battery of Makita's New 10.8V Platform

BL1015 1.5Ah

BL1020B 2.0Ah

BL1040B 4.0Ah



Cordless Driver Drill
10mm (3/8")
DF332D



Cordless Driver Drill
10mm (3/8")
DF032D

Cordless Hammer Driver Drill
10mm (3/8")
HP332D



Fast Charging

22 minutes

DC10SA

to fully charge a 1.5Ah slide Li-ion battery



BL1015



DC10SA

Developed specially for charging the slide Li-ion batteries of new 10.8V platform

Forced air cooling system DC10SA only

- Stand-by time until the charge starts can be greatly shortened by using charger DC10SA equipped with a built-in cooling fan.
- Effectively cools down every battery cell with the forced air cooling system and the heat sinks.





Charging status indicator

shows the charging status of a battery being charged in 2 stages: less than 80% and 80% or more.






Compact and lightweight design

DC10WC provides higher charging performance than DC10WA, but with a more compact and lightweight design.
(It's same charging time(50mim.)as DC10WA for 1.3Ah battery although the new battery is 1.5Ah.)



Multi-Contact Slide-type Terminal

- Ensures stable contact with tool even under extreme vibration.
- Allows tools to be equipped with an ergonomic handle design.



Wall mountable for charging

can be mounted on the wall for charging, allowing the user to obtain maximum working space on workbench.



Li-ion Battery & Charger Time Reference, Compatibility Chart

10.8V LITHIUM-ION	BL1015 10.8V 1.5Ah	BL1020B 10.8V 2.0Ah with Battery fuel gauge	BL1040B 10.8V 4.0Ah with Battery fuel gauge
DC10SA for 10.8V	22 min	30 min	60 min
DC10WC for 10.8V	50 min	70 min	130 min

Battery fuel gauge

(BL1020B, BL1040B)

The power remaining in the battery can be indicated in 4 stages simply by pushing a button.



Battery fuel gauge (4 stage LED)


Compact eXtreme Technology

High-efficiency brushless motor

enables high power and more work amount.

Drilling Work amount at High speed

Test conditions: Drilled holes through a 30mm thick Melapi with ø12mm Auger bit in high speed mode with 2.0Ah battery.

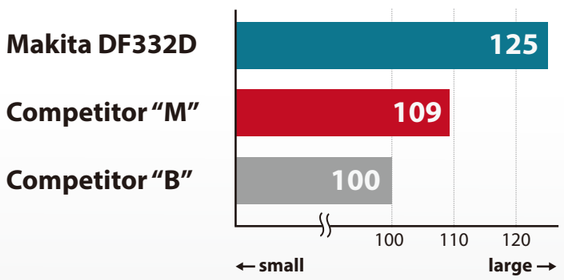

Compact overall length





Cordless Driver Drill

DF332D

DF032D

6.35mm (1/4")
Hex chuck

No load speed:
0-1,500rpm
Max tightening torque:
35N·m (310in·lbs)
(Hard joint)





Cordless Hammer Driver Drill

HP332D

No load speed: 0-1,500rpm
Max tightening torque:
35N·m (310in·lbs) (Hard joint)

