Satisfy Professional's Needs

LXT

Cordless Auto Feed Screwdriver
DFR551 / DFR452

High rotation speed
6,000 rpm



18V LITHIUM-ION

DFR551

55 mm (2-3/16")



DFR452

41 mm (1-5/8")



Continuous work amount

Model: DFR452
Battery: BL1850B / Trigger lock-on condition
Drove 25mm drywall screw through 12.5mm Drywall into 38mm SPF plate.

Push drive is on.

2,700 pcs

BL MOTOR XPT

Cordless Auto Feed Screwdriver



Collated drywall screw

Model	Diameter	Overall length
DFR551	3.5 - 4.2 mm	25 - 55 mm
DFR452		20 - 41 mm

More reliable Casing attachment

Enhanced durability

- Screw feeding mechanism redesigned to improve durability and reduce screw fall
- Improved durability by changing the material of Casing from Plastic to Aluminum.



Quick attachment / removal

Reduces the trouble of reversing and replacing a bit







Push drive technology

The motor rotates at full speed only when the screw is pressed against the board to reduce power consumption and noise.

Push

Motor starts up.



Drive

Tightening finished. ▶ Motor stops when bit is removed from screw head.



Continuous work amount

Model: DFR452
Battery: BL1850B / Trigger lock-on condition
Drove 25mm drywall screw through 12.5mm Drywall into 38mm SPF plate.

Push drive is on.

2,700 pcs

Push drive is off.

880 pcs

BL MOTOR

Unfastening operation

The tool allows you to change the direction of driver bit rotation with ease, either towards the right (clockwise) to tighten a screw or towards the left (counterclockwise) to loosen a screw.


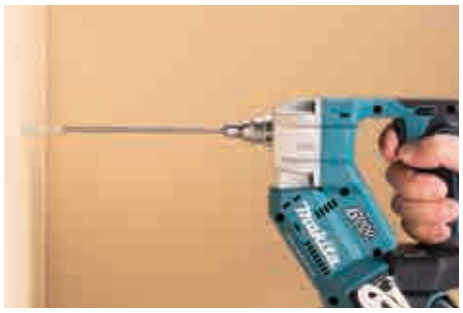




photo: DFR551

XPT

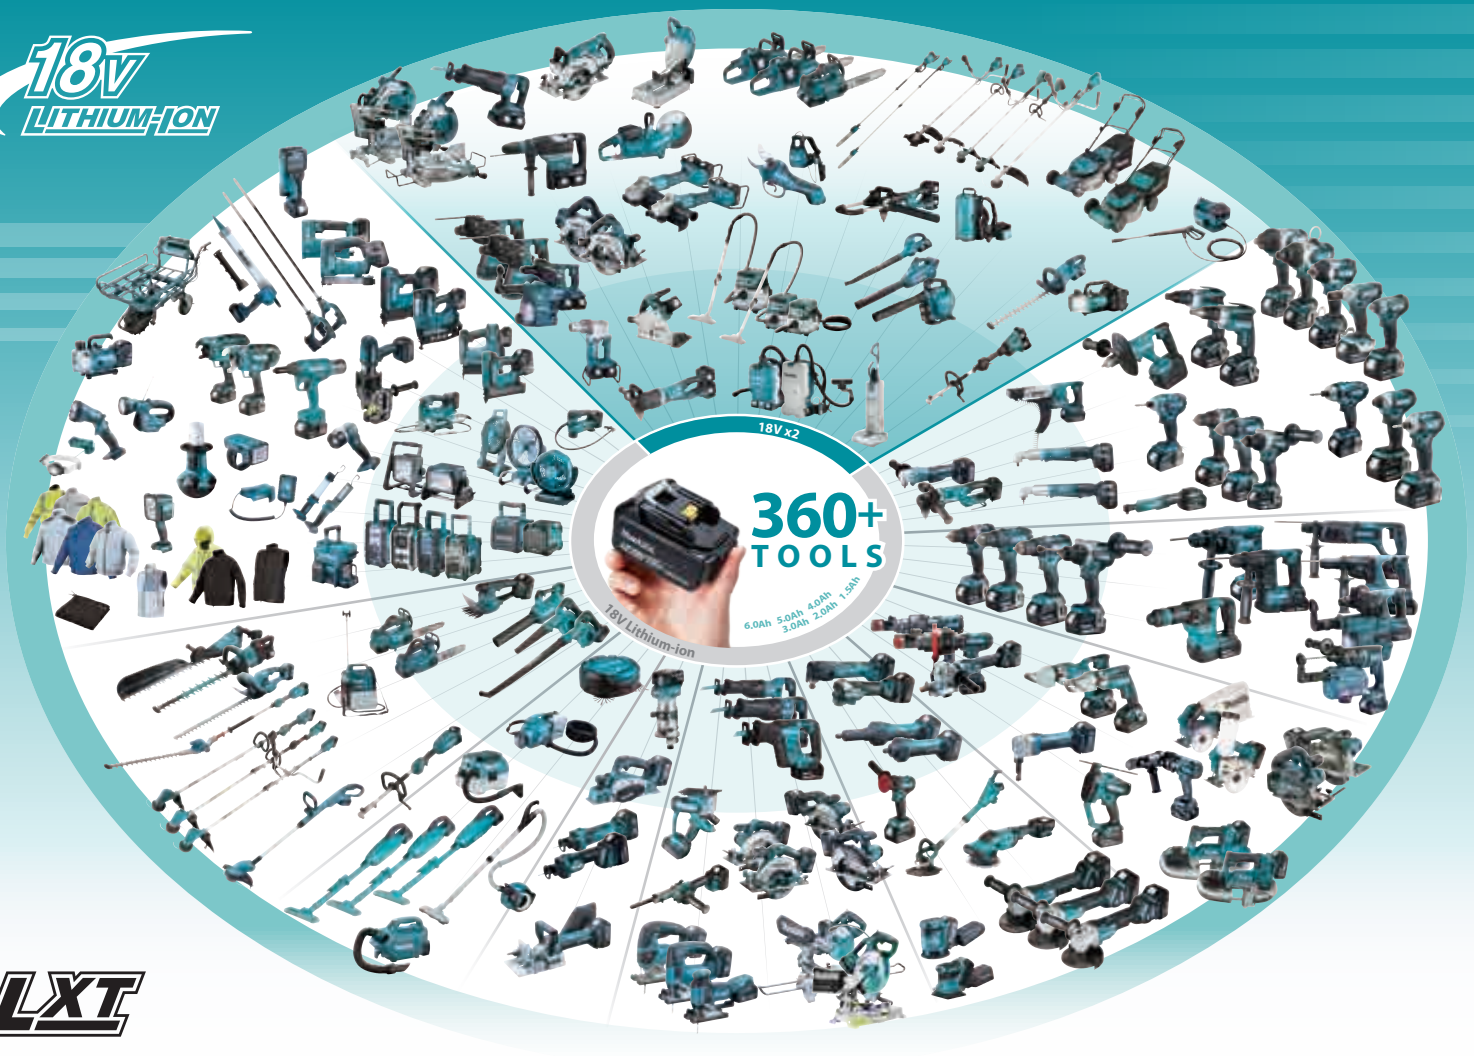

Accessories

Casing 55 set
Model: DFR551
Part No. 191W94-5



Casing 41 set
Model: DFR452
Part No. 191W93-7



Bit (5 pcs/set)



+ bit



Square bit



Pozidrive bit





Model	Description	Part No.
DFR551	+ bit 2-155 set	191V02-0
	Square bit 2-155 set	191V04-6
	Pozidrive bit 2-155 set	191V06-2
DFR452	+ bit 2-137 set	191V01-2
	Square bit 2-137 set	191V03-8
	Pozidrive bit 2-137 set	191V05-4

Charging Time

18V LITHIUM-ION	Fast Charging DC18RC	DC18RD	DC18SD
BL1815N 1.5Ah	**15** min		**30** min
BL1820B 2.0Ah	**24** min		**45** min
BL1830B 3.0Ah	**22** min		**60** min
BL1840B 4.0Ah	**36** min		**90** min
BL1850B 5.0Ah	**45** min		**110** min
BL1860B 6.0Ah	**55** min		**130** min

Cordless Auto Feed Screwdriver

DFR551 / DFR452

- Variable Speed
- Reversing
- Carrying Case

	DFR551	DFR452
Screw Strip	*3.5 - 4.2 x 20 - 41 mm (1/8 - 5/32 x 13/16 - 1-5/8 ")*	*3.5 - 4.2 x 25 - 55 mm (1/8 - 5/32 x 1 - 2-3/16 ")*
Driving Shank (Hex)	*6.35 mm (1/4")*	*6.35 mm (1/4")*
No Load Speed (RPM)	*0 - 6,000*	*0 - 6,000*
Sound Pressure Level	*74 dB(A)*	*75 dB(A)*
Vibration Level	*Screwdriving w/o Impact: 2.5 m/s² or less*	*Screwdriving w/o Impact: 2.5 m/s² or less*
Dimensions (L x W x H)	*w/o Battery: 396 x 88 x 165 mm (15-5/8 x 3-1/2 x 6-1/2") w/ BL1830B / BL1840B / BL1850B / BL1860B: 396 x 88 x 211 mm (15-5/8 x 3-1/2 x 8-5/16")*	*w/o Battery: 360 x 88 x 165 mm (14-1/8 x 3-1/2 x 6-1/2") w/ BL1830B / BL1840B / BL1850B / BL1860B: 360 x 88 x 211 mm (14-1/8 x 3-1/2 x 8-5/16")*
Net weight	*1.9 - 2.2 kg (4.2 - 4.9 lbs.)*	*1.9 - 2.2 kg (4.2 - 4.9 lbs.)*

Standard Equipment : Phillips Bit x3, Belt Clip, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation
3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202202