Accessories

End nozzle 74 set

Part No. 1914H0-2

A nozzle suitable for blowing away wet fallen leaves or other heavy objects.





Flat nozzle set

Part No. 1914H1-0

A nozzle for blowing off fallen leaves adhering to the ground, etc.





Portable Power Pack

Portable Power Pack

High energy capacity of 1,500Wh

PDC1500



Charger
DC4001
Charging time
PDC1500: 450 min.



Energy capacity of 1,200Wh

PDC1200



Charger
DC4001
Charging time
PDC1200: 360 min.





XPT

High water-resistance allows to operate the machine even if it is wet with water.

Battery Powered

Blower
UB003C



Backpack Blower
UB004C



Grass Trimmer
UR101C
UR201C
UR202C



Lawn mower
LM001C



Adapter set

40Vmax
Part No.
191N62-4



Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

18Vx2
Part No.
191J51-5



Adapter between Battery box of Portable power pack and Product on 18Vx2 LXT platform

Charging Time

	DC4001
PDC1500	450 min
PDC1200	360 min

Battery Powered Backpack Blower
UB004C

Variable Speed
Anti-restart function
Electronic 3-Speed
Constant Speed

Air volume	*w/ PDC1500, Cruise control mode, Mode 1 / 2 / 3: 8.5 / 15.2 / 19.7 m³/min* *w/ PDC1500, Boost mode: 20.9 m³/min*
Max air velocity	*w/ PDC1500, Cruise control mode, Mode 1 / 2 / 3: 33.2 / 59.0 / 76.3 m/s* *w/ PDC1500, Boost mode: 80.7 m/s*
Blowing force	*w/ PDC1500, Cruise control mode, Mode 1 / 2 / 3: 5 / 15 / 25 N* *w/ PDC1500, Boost mode: 28 N*
No load speed	*Cruise control mode, Mode 1 / 2 / 3: 10,500 / 18,000 / 22,500 min⁻¹* *Boost mode: 23,800 min⁻¹*
Continuous use	*55-200 min*
(Attachment)	*Standard nozzle*
(Battery)	*PDC1500*
Vibration level	*Operation w/o load, EN50636-2-100: 2.5 m/s² or less*
Vibration K factor	*Operation w/o load, EN50636-2-100: 1.5 m/s²*
Sound pressure level	*EN50636-2-100: 82.3 dB(A)*
Sound power level	*EN50636-2-100: 96.1 dB(A)*
Noise K factor	*3.1, 2.1 dB(A)*
Dimensions (L x W x H)	*460 x 575 x 585 mm (18-1/8 x 22-5/8 x 23")*
Net weight	*16.5 - 18.6 kg (36.4 - 41.0 lbs.)*
(Battery)	*PDC1200 - PDC1500*

Standard Equipment :
End nozzle, Flat nozzle, Pipe support belt complete, Pipe belt complete

Portable Power Pack
PDC1500

Capacity	43.55 Ah
Energy capacity	1,567.8 Wh
Number of cells	130
Charging time	450 min.
Dimensions	w/o Harness:
(L x W x H)	369 x 312 x 131 mm
	(14-1/2 x 12-1/4 x 5-1/8")
Net weight	Battery only:
	10.9 kg (24.0 lbs.)*
	Harness assembly:
	12.9 kg (28.4 lbs.)*
Power supply cord	Battery side: 1.2 m (3.9 ft)
	Adapter side: 0.6 m (2.0 ft)

*not covered by EPTA-Procedure

Standard Equipment : Harness, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.


Makita Corporation
3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202404

www.makita.com

Satisfy Professional's Needs

Battery Powered Backpack Blower
UB004C
Portable Power Pack
PDC1500

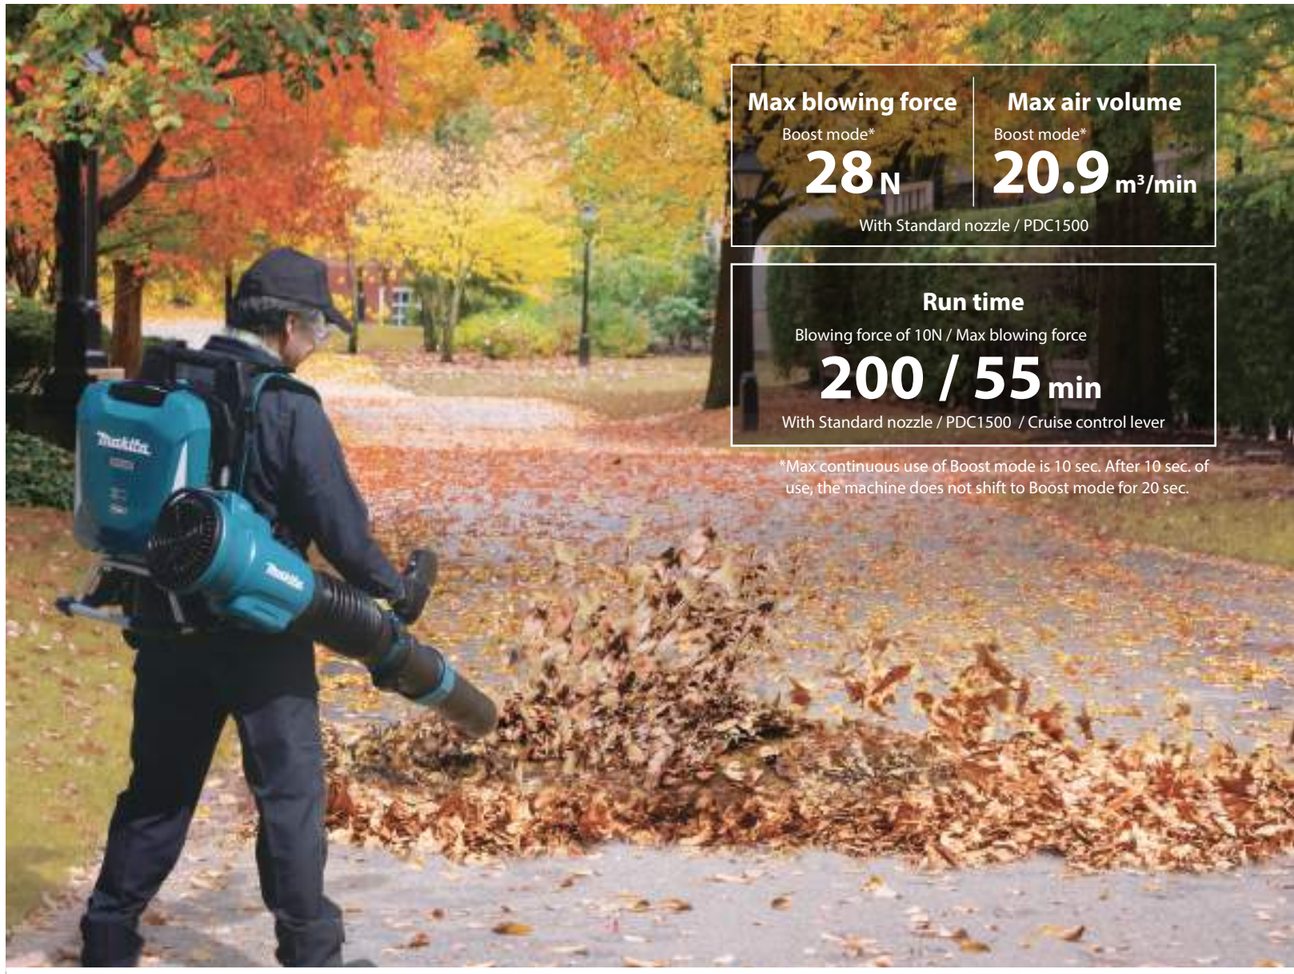

*Max continuous use of Boost mode is 10 sec. After 10 sec. of use, the machine does not shift to Boost mode for 20 sec.

With End nozzle 74



With Flat nozzle



BL MOTOR XPT



High blowing force of 25N and Max blowing force of 28N in Boost mode (with a time limit)



High power

The airflow path from Fan has been changed from a curved line in Predecessor model to a straight line, increasing blowing efficiency by approx 10%.



Max blowing force	Max air volume	Max air velocity
Boost mode*	Boost mode*	Boost mode*
28 N	20.9 m³/min	80.7 m/s

With Standard nozzle / PDC1500

*Max continuous use of Boost mode is 10 sec. After 10 sec. of use, the machine does not shift to Boost mode for 20 sec.

Connector

High blower performance similar to 65 cm³ class engine backpack blower

1,500Wh high capacity

Portable Power Pack

PDC1500

Quick removal/attachment

allows for the battery to be easily removed or attached to the main unit.



Reflectors

keep operator visible from a distance even in the dark.



4-LED fuel gauge

indicates the battery status by four green LEDs.



XPT

eXtreme Protection Technology / IPX4 compatible

High water-resistance allows to operate the machine even if it is wet with water.






Improvements for more comfortable backpacking experience

Redesigned backpack harness section for more comfortable backpacking experience
- Mesh fabric for belts for improved breathability
- Shoulder belt material and shape have been redesigned to reduce the stress on user's shoulders



Variable speed control by trigger + Cruise control lever

- Trigger can be fixed at a desired position by user.
- The machine can shift to Boost mode by pulling Trigger fully from the position where Trigger stops in the halfway position.

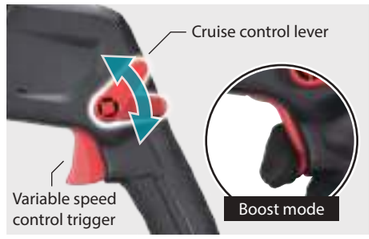

Position-adjustable grip

The grip position is adjustable forward/ backward and left/right to suit user's size or work posture.

