
# Cordless Angle Impact Driver TL064D
# Cordless Angle Impact Wrench TL065D




## Angle Impact Driver
## TL064D

# Ultra-Compact Angle Head

Ideal for Fastening in Tight Spots

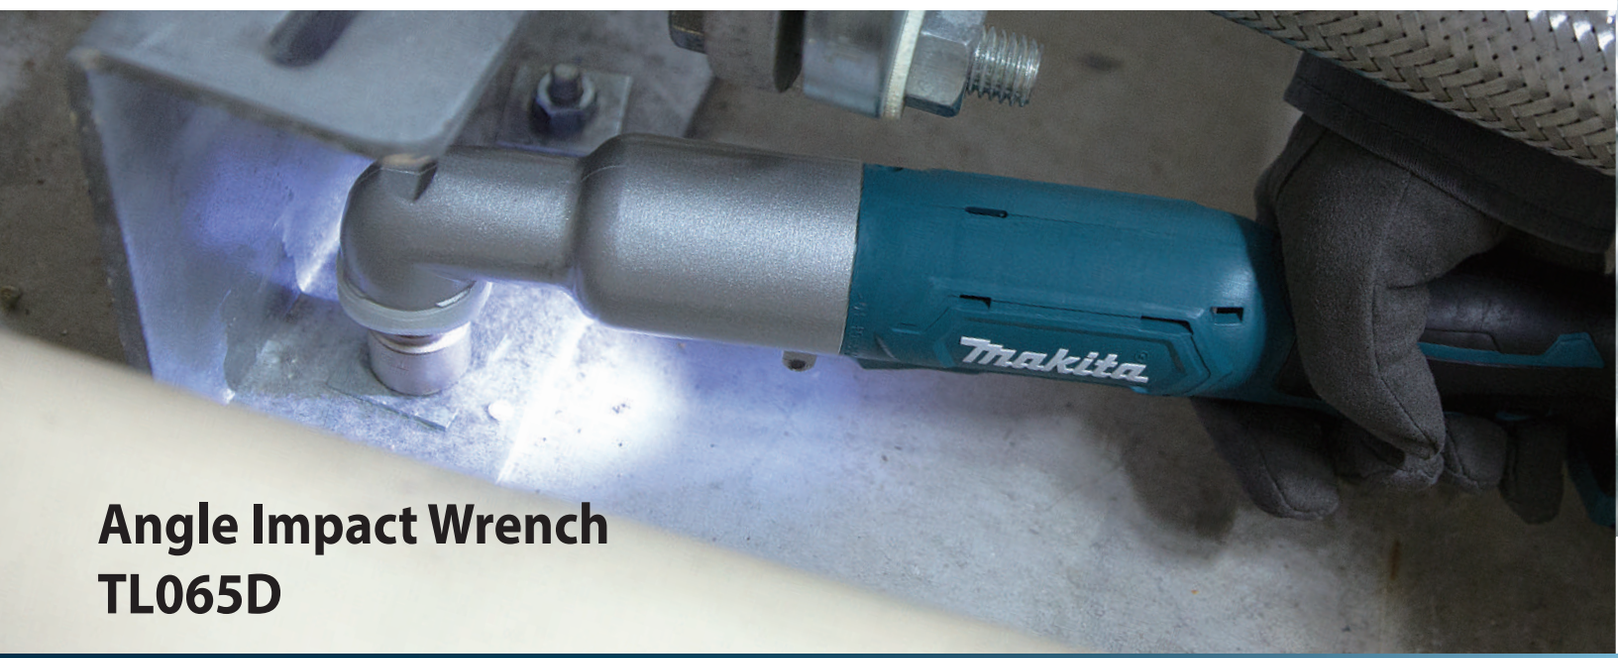


## Angle Impact Wrench
## TL065D




**Powered by Slide Li-ion Battery of Makita's New 12V max Platform**

CXT

12V max LITHIUM-ION

# Compact & Slim for Easy Handling

Head height **53mm**

Center height **18mm**

Max fastening torque **60N·m**

Lightweight **1.3kg** (2.8lbs.) w/BL1016




Photo : TL064D

### Single LED job light with preglow/ afterglow functions



### Li-ion Battery & Charging Time Reference, Compatibility Chart

| 12Vmax LITHIUM-ION CXT *with Battery fuel gauge | DC10SB  | DC10WD  |
|---|---|---|
| BL1016 1.5Ah  | 22 min | 50 min |
| *BL1021B 2.0Ah  | 30 min | 70 min |
| *BL1041B 4.0Ah  | 60 min | 130 min |

### For fastening and loosening in tight spaces




Hex Shank: 6.35 mm (1/4") TL064D only

### Angle wrench head



Square Drive: 9.5 mm (3/8") TL065D only

### Ergonomically designed handle with sure grip




Large switch lever

## Accessories

### Optional attachments for versatility




**Angle head**
Part No. 135183-8
(For C-form bit)
Part No. 135200-4




**Angle wrench head**
9.5mm (3/8") square drive
Part No. 135201-2



**Straight head**
Part No. 192440-7
(For E-form bit)
Part No. 192486-3



**Ratchet head**
Part No. 192439-2




**Socket adapter**
Use with Ratchet head
9.5mm (3/8") square drive
Part No. 134745-9
12.7mm (1/2") square drive
Part No. 134746-7



**Socket**
Use with Ratchet head
Size:17x 31
Part No. 134743-3
Size:19x 33
Part No. 134744-1



## Cordless Angle Impact Driver TL064D

## Cordless Angle Impact Wrench TL065D

Variable Speed
Brake
Reversing
Built-in Job Light
Carrying Case

*Standard Equipment :*
Phillips Bit, Belt Clip, Battery, Charger

| | TL064D |
|---|---|
| **Capacity** Machine Screw : | M4 - M8 (5/32" - 5/16") |
| Standard Bolt : | M4 - M12 (5/32" - 1/2") |
| High Tensile Bolt : | M4 - M8 (5/32" - 5/16") |
| Coarse thread (in length) : | 22 - 75mm (7/8" - 2-31/32") |
| **Hex Shank** | 6.35 mm (1/4") |
| **No Load Speed (RPM)** | 0 - 2,000 |
| **Impacts Per Minute (IPM)** | 0 - 3,000 |
| **Max Fastening Torque** | 60 N·m (530 in.lbs.) |
| **Vibration Level** | Impact tightening of fasteners of the maximum capacity of the tool: 15.0 m/s² |
| **Sound Pressure Level** | 91 dB(A) |
| **Sound Power Level** | 102 dB(A) |
| **Dimensions(L x W x H)** | 361x66x86mm (14-1/4"x2-5/8"x3-3/8") |
| **Net weight** | 1.3kg (2.8lbs.)- 1.6kg (3.6lbs.) |

Variable Speed
Brake
Reversing
Built-in Job Light
Carrying Case

*Standard Equipment :*
Belt Clip, Battery, Charger

| | TL065D |
|---|---|
| **Capacity** Standard Bolt : | M4 - M12 (5/32" - 1/2") |
| High Tensile Bolt : | M4 - M8 (5/32" - 5/16") |
| **Square Drive** | 9.5 mm (3/8") |
| **No Load Speed (RPM)** | 0 - 2,000 |
| **Impacts Per Minute (IPM)** | 0 - 3,000 |
| **Max Fastening Torque** | 60 N·m (530 in.lbs.) |
| **Vibration Level** | Impact tightening of fasteners of the maximum capacity of the tool: 18.0 m/s² |
| **Sound Pressure Level** | 90 dB(A) |
| **Sound Power Level** | 101 dB(A) |
| **Dimensions(L x W x H)** | 361x66x86mm (14-1/4"x2-5/8"x3-3/8") |
| **Net weight** | 1.3kg (2.8lbs.)- 1.6kg (3.6lbs.) |

*Items of standard equipment and specifications may vary by country or area.*
*The weight may differ depending on the attachment(s), including the battery cartridge.*
*The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.*


Makita Corporation
3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan



PRINTED IN JAPAN 201705