

Page 3-2

FOR BG SERIES MINI-CONTACTORS

- Type RF9, phase failure sensitive, manual resetting
- Type RFA9, phase failure sensitive, automatic resetting
- Type RFN9, non-phase failure sensitive, manual resetting
- Type RFNA9, non-phase failure sensitive, automatic resetting.



Page 3-4

FOR BF SERIES CONTACTORS

- Type RF38, phase failure sensitive, manual or automatic resetting
- Type RFN38, non phase failure sensitive, manual or automatic resetting
- Type RF95, phase failure sensitive, manual resetting
- Type RFA95, phase failure sensitive, automatic resetting
- Type RFN95, non phase failure sensitive, manual resetting
- Type RFNA95, non phase failure sensitive, automatic resetting.



Page 3-6

FOR B SERIES CONTACTORS

- Type RF200 and RF420, phase failure sensitive, manual or automatic resetting
- Type RFN200 and RFN420, non phase failure sensitive, manual or automatic resetting.



Page 3-9

THERMISTOR PROTECTION RELAY

- 24VDC and 24 to 240VAC supply types.

RF38 features

FRONT PROTECTION COVER OF THERMAL OVERLOAD RELAYS

A sealable protection cover is available. When fitted on to the relay front, it precludes all possible adjuster tampering and involuntary activation of the “Reset” and “Stop” buttons of the thermal overload relay.



CLEAR IDENTIFICATION OF THERMAL OVERLOAD RELAY MANUAL OR AUTOMATIC RESETTING

The RF38 thermal overload relay is supplied configured for manual resetting. Breaking the plate below the “Reset” button allows for the automatic resetting configuration.



FIXING EASE OF THE THERMAL OVERLOAD RELAY

While the thermal overload relay is being linked to the contactor, its auxiliary contact fits on and connects to the coil terminal by rigid terminal.
Complete relay fixing is done in a single operation, without the need of other connections.



SEALABLE RELAY COVER

A handy closing flap feature excludes any tampering of the thermal overload relay adjuster.



MOTOR PROTECTION RELAYS



- Thermal overload relays for currents between 0.09 and 420A
- Phase failure sensitive and non phase failure sensitive versions
- Automatic and/or manual resetting
- Independent or direct mounting on contactor
- Thermistor protection relay.

SEC. - PAGE

Thermal overload relays

For BG series mini-contactors ..... 3 - 2
For BF series contactors ..... 3 - 4
For B series contactors ..... 3 - 6
Accessories ..... 3 - 8

Electronic relay

Thermistor protection relay ..... 3 - 9

Dimensions ..... 3 - 10
Wiring diagrams ..... 3 - 11
Technical characteristics ..... 3 - 12

Phase failure / single phase sensitive
Three poles (three phase)



11 RF9...



11 RFA9...

Order code	Adjustment range	Protection fuses IEC aM	IEC gG	UL K5	Qty per pkg	Wt
	[A]	[A]	[A]	[A]	n°	[kg]
MANUAL RESETTING. Direct mounting on BG06, BG09, BG12 mini-contactors.						
11 RF9 015	0.09 - 0.15	0.25	—	—	1	0.116
11 RF9 023	0.14 - 0.23	0.5	—	1	1	0.116
11 RF9 033	0.2 - 0.33	0.5	1	1	1	0.116
11 RF9 05	0.3 - 0.5	1	2	3	1	0.116
11 RF9 075	0.45 - 0.75	1	2	3	1	0.116
11 RF9 1	0.6 - 1	2	4	3	5	0.116
11 RF9 1V5	0.9 - 1.5	2	4	6	5	0.116
11 RF9 2V3	1.4 - 2.3	4	6	10	5	0.116
11 RF9 33	2 - 3.3	4	10	10	5	0.116
11 RF9 5	3 - 5	6	16	15	5	0.116
11 RF9 75	4.5 - 7.5	8	20	25	5	0.116
11 RF9 10	6 - 10	10	32	30	5	0.116
11 RF9 15	9 - 15	16	40	45	5	0.116
AUTOMATIC RESETTING. Direct mounting on BG06, BG09, BG12 mini-contactors.						
11 RFA9 015	0.09 - 0.15	0.25	—	—	1	0.116
11 RFA9 023	0.14 - 0.23	0.5	—	1	1	0.116
11 RFA9 033	0.2 - 0.33	0.5	1	1	1	0.116
11 RFA9 05	0.3 - 0.5	1	2	3	1	0.116
11 RFA9 075	0.45 - 0.75	1	2	3	1	0.116
11 RFA9 1	0.6 - 1	2	4	3	1	0.116
11 RFA9 1V5	0.9 - 1.5	2	4	6	1	0.116
11 RFA9 2V3	1.4 - 2.3	4	6	10	1	0.116
11 RFA9 33	2 - 3.3	4	10	10	1	0.116
11 RFA9 5	3 - 5	6	16	15	1	0.116
11 RFA9 75	4.5 - 7.5	8	20	25	1	0.116
11 RFA9 10	6 - 10	10	32	30	1	0.116
11 RFA9 15	9 - 15	16	40	45	1	0.116

NOTE: Two-pole (single phase) versions are available on request.
Add the letter "S" in the order code e.g. 11RF9015 is three pole; 11RFS9015 two pole.
The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when across the line starting is considered.

Three-phase IEC motor powers ❶

230V	400V	415V	440V	500V	690V
[kW]	[kW]	[kW]	[kW]	[kW]	[kW]
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	0.37
❷	❷	❷	0.37	0.37	0.55
❷	❷	0.55	0.55	0.55	0.75
0.37	0.55-0.75	0.75	0.75	1.1	1.1-1.5
0.55	1.1	1.1	1.1-1.5	1.5	2.2
0.75-1.1	1.5	1.5-2.2	2.2	2.2	3-3.7
1.5	2.2-3	3-3.7	3-3.7	3-3.7	4
2.2	3.7-4	4	3.7-4	4-5.5	—
3.2	5.5	5.5-7.5	5.5	—	—
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	0.37
❷	❷	❷	0.37	0.37	0.55
❷	❷	0.55	0.55	0.55	0.75
0.37	0.55-0.75	0.75	0.75	1.1	1.1-1.5
0.55	1.1	1.1	1.1-1.5	1.5	2.2
0.75-1.1	1.5	1.5-2.2	2.2	2.2	3-3.7
1.5	2.2-3	3-3.7	3-3.7	3-3.7	4
2.2	3.7-4	4	3.7-4	4-5.5	—
3.2	5.5	5.5-7.5	5.5	—	—

❶ The indicated power apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.
❷ No standard power ratings exist; select relay according to current consumption.

NOTE: To facilitate connection between the auxiliary NC contact of the RF...9 thermal relay and terminal A2 of the contactor, insert the conductor into the appropriate conduit as shown.

RF9...
RFA9...



Certifications and compliance
Certifications obtained:

Type	cULus	CSA	GOST	CCC
RF9... - RFA9...	●	●	●	●

● Certified products.

cULus – UL Listed for USA and Canada (File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating; the trip current is 120% FLA.
CSA – CSA certified for Canada (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.

Non phase failure / non single phase sensitive
Three poles (three phase)



11 RFN9...



11 RFNA9...

Order code	Adjustment range	Protection fuses IEC aM	gG	UL K5	Qty per pkg	Wt
	[A]	[A]	[A]	[A]	n°	[kg]
MANUAL RESETTING. Direct mounting on BG06, BG09, BG12 mini-contactors.						
11 RFN9 015	0.09 - 0.15	0.25	—	—	1	0.123
11 RFN9 023	0.14 - 0.23	0.5	—	1	1	0.123
11 RFN9 033	0.2 - 0.33	0.5	1	1	1	0.123
11 RFN9 05	0.3 - 0.5	1	2	3	1	0.123
11 RFN9 075	0.45 - 0.75	1	2	3	1	0.123
11 RFN9 1	0.6 - 1	2	4	3	1	0.123
11 RFN9 1V5	0.9 - 1.5	2	4	6	1	0.123
11 RFN9 2V3	1.4 - 2.3	4	6	10	1	0.123
11 RFN9 33	2 - 3.3	4	10	10	1	0.123
11 RFN9 5	3 - 5	6	16	15	1	0.123
11 RFN9 75	4.5 - 7.5	8	20	25	1	0.123
11 RFN9 10	6 - 10	10	32	30	1	0.123
11 RFN9 15	9 - 15	16	40	45	1	0.123
AUTOMATIC RESETTING. Direct mounting on BG06, BG09, BG12 mini-contactors.						
11 RFNA9 015	0.09 - 0.15	0.25	—	—	1	0.123
11 RFNA9 023	0.14 - 0.23	0.5	—	1	1	0.123
11 RFNA9 033	0.2 - 0.33	0.5	1	1	1	0.123
11 RFNA9 05	0.3 - 0.5	1	2	3	1	0.123
11 RFNA9 075	0.45 - 0.75	1	2	3	1	0.123
11 RFNA9 1	0.6 - 1	2	4	3	1	0.123
11 RFNA9 1V5	0.9 - 1.5	2	4	6	1	0.123
11 RFNA9 2V3	1.4 - 2.3	4	6	10	1	0.123
11 RFNA9 33	2 - 3.3	4	10	10	1	0.123
11 RFNA9 5	3 - 5	6	16	15	1	0.123
11 RFNA9 75	4.5 - 7.5	8	20	25	1	0.123
11 RFNA9 10	6 - 10	10	32	30	1	0.123
11 RFNA9 15	9 - 15	16	40	45	1	0.123

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when across the line starting is considered.

Three-phase IEC motor powers ❶

230V [kW]	400V [kW]	415V [kW]	440V [kW]	500V [kW]	690V [kW]
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	0.37
❷	❷	❷	0.37	0.37	0.55
❷	❷	0.55	0.55	0.55	0.75
0.37	0.55-0.75	0.75	0.75	1.1	1.1-1.5
0.55	1.1	1.1	1.1-1.5	1.5	2.2
0.75-1.1	1.5	1.5-2.2	2.2	2.2	3-3.7
1.5	2.2-3	3-3.7	3-3.7	3-3.7	4
2.2	3.7-4	4	3.7-4	4-5.5	—
3.2	5.5	5.5-7.5	5.5	—	—
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	❷
❷	❷	❷	❷	❷	0.37
❷	❷	❷	0.37	0.37	0.55
❷	❷	0.55	0.55	0.55	0.75
0.37	0.55-0.75	0.75	0.75	1.1	1.1-1.5
0.55	1.1	1.1	1.1-1.5	1.5	2.2
0.75-1.1	1.5	1.5-2.2	2.2	2.2	3-3.7
1.5	2.2-3	3-3.7	3-3.7	3-3.7	4
2.2	3.7-4	4	3.7-4	4-5.5	—
3.2	5.5	5.5-7.5	5.5	—	—

❶ The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.
❷ No standard power ratings exist; select relay according to current consumption.

NOTE: To facilitate connection between the auxiliary NC contact of the RFN...9 thermal relay and terminal A2 of the contactor, insert the conductor into the appropriate conduit as shown.

RFN9...
RFNA9...



Certifications and compliance
Certifications obtained:

Type	cULus	CSA	GOST	CCC
RFN9... - RFNA9...	●	●	●	●

● Certified products.

cULus – UL Listed for USA and Canada (File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating; the trip current is 120% FLA.
CSA – CSA certified for Canada (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.

Phase failure / single phase sensitive Three poles (three phase)



RF38…



11 RF95 3…



11 RFA95 3…

Order code	Adjustment range	Protection fuses IEC aM	IEC gG	UL ❶	Qty per pkg	Wt
	[A]	[A]	[A]	[A]	n°	[kg]
MANUAL OR AUTOMATIC RESETTING. Direct mounting on BF09 - BF38 contactors. Independent mounting with RFX38 04 base.						
RF38 0016	0.1-0.16	0.25	—	1	1	0.160
RF38 0025	0.16-0.25	0.5	—	1	1	0.160
RF38 0040	0.25-0.4	0.5	1	3	1	0.160
RF38 0063	0.4-0.63	1	2	3	1	0.160
RF38 0100	0.63-1	2	4	3	5	0.160
RF38 0160	1-1.6	2	4	6	5	0.160
RF38 0250	1.6-2.5	4	6	10	5	0.160
RF38 0400	2.5-4	4	6	15	5	0.160
RF38 0650	4-6.5	8	16	25	5	0.160
RF38 1000	6.3-10	10	20	40	5	0.160
RF38 1400	9-14	16	32	50	5	0.160
RF38 1800	13-18	25	40	70	5	0.160
RF38 2300	17-23	25	50	90	5	0.160
RF38 2500	20-25	32	50	100	5	0.160
RF38 3200	24-32	40	63	120	1	0.160
RF38 3800	32-38	45	63	150	1	0.160
MANUAL RESETTING. Direct mounting on BF50-BF110 contactors. Complete with G261 links. Independent mounting with G270 base.						
11 RF95 3 33	20 - 33	40	63	110	1	0.365
11 RF95 3 42	28 - 42	45	80	150	1	0.365
11 RF95 3 50	35 - 50	50	100	175	1	0.365
11 RF95 3 65	46 - 65	80	125	200	1	0.365
11 RF95 3 82	60 - 82	100	200	250	1	0.365
11 RF95 3 95	70 - 95	100	200	350	1	0.365
11 RF95 3 110	90 - 110	125	200	350	1	0.365
AUTOMATIC RESETTING. Direct mounting on BF50-BF110 contactors. Complete with G261 links. Independent mounting with G270 base.						
11 RFA95 3 33	20 - 33	40	63	110	1	0.365
11 RFA95 3 42	28 - 42	45	80	150	1	0.365
11 RFA95 3 50	35 - 50	50	100	175	1	0.365
11 RFA95 3 65	46 - 65	80	125	200	1	0.365
11 RFA95 3 82	60 - 82	100	200	250	1	0.365
11 RFA95 3 95	70 - 95	100	200	350	1	0.365
11 RFA95 3 110	90 - 110	125	200	350	1	0.365

❶ UL RK5 fuse class for RF38 types and UL K5 fuse class for RF…95 types.

NOTE: Two pole (single phase) versions are available on request.
Add the letter "S" in the order code e.g. RF381000 is three pole; RFS381000 two pole.
The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when across the line starting is considered.

Three-phase IEC motor powers ❸

230V [kW]	400V [kW]	415V [kW]	440V [kW]	500V [kW]	690V [kW]
❷	❷	❷	❷	❷	0.06
❷	0.06	0.06	0.06-0.09	0.06-0.09	0.09-0.12
0.06	0.09	0.09	0.12	0.12	0.18
0.09	0.12-0.18	0.12-0.18	0.18	0.18	0.25
0.12	0.25	0.25	0.37	0.25-0.37	0.37-0.55
0.18-0.25	0.37-0.55	0.37-0.55	0.55	0.55-0.75	0.75
0.37	0.75	0.75	0.75-1.1	1.1	1.1-1.5
0.55-0.75	1.1-1.5	1.1-1.5	1.1	1.5-2.2	2.2-3
1.1-1.5	2.2	2.2	2.2-3	3	4
1.5-2.2	3-4	4	4	4-5.5	5.5-7.5
3	5.5	5.5	5.5-7.5	5.5-7.5	11
4	7.5	7.5-9	9	11	15
5.5	11	9-11	11	11	18.5
5.5	11	11	11	15	22
7.5	15	15	15	18.5	30
11	18.5	18.5	18.5	22	30
7.5	11-15	11-15	15-18.5	15-18.5	22-25
9-10	15-18.5	18.5-22	18.5-22	22-25	30-33
10-11	22	25	25	30	37-40
15-18.5	25-30	30-33	30-33	33-40	45-55
22	33-40	37-45	37-45	45-55	59-75
22-25	40-45	45-51	45-55	55-63	75-80
30	55	55	55	75	90
7.5	11-15	11-15	15-18.5	15-18.5	22-25
9-10	15-18.5	18.5-22	18.5-22	22-25	30-33
10-11	22	25	25	30	37-40
15-18.5	25-30	30-33	30-33	33-40	45-55
22	33-40	37-45	37-45	45-55	59-75
22-25	40-45	45-51	45-55	55-63	75-80
30	55	55	55	75	90

❷ No standard powers ratings exist; select relay according to current consumption.
❸ The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

Certifications and compliance

Certifications obtained:

Type	c UL us	CSA	GOST	CCC	Registers of shipping RINA	Registers of shipping LROS
RF38	●	—	●	●	—	—
RF95	●	●	●	●	●	●
RFA95	●	●	●	●	—	—

● Certified products.

cULus – UL Listed for USA and Canada (File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 82A FLA range and 10000 Amps RMS for 95A and 110A FLA range; the trip current is 120% FLA.
CSA – CSA certified for Canada (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.

Non phase failure / non single phase sensitive Three poles (three phase)



RFN38…



11 RFN95 3…



11 RFNA95 3…

Order code	Adjustment range	Protection fuses IEC aM	IEC gG	UL ❶	Qty per pkg	Wt
	[A]	[A]	[A]	[A]	n°	[kg]
MANUAL OR AUTOMATIC RESETTING. Direct mounting on BF09 - BF38 contactors. Independent mounting with RFX38 04 base.						
RFN38 0016	0.1-0.16	0.25	—	1	1	0.160
RFN38 0025	0.16-0.25	0.5	—	1	1	0.160
RFN38 0040	0.25-0.4	0.5	1	3	1	0.160
RFN38 0063	0.4-0.63	1	2	3	1	0.160
RFN38 0100	0.63-1	2	4	3	1	0.160
RFN38 0160	1-1.6	2	4	6	1	0.160
RFN38 0250	1.6-2.5	4	6	10	1	0.160
RFN38 0400	2.5-4	4	6	15	1	0.160
RFN38 0650	4-6.5	8	16	25	1	0.160
RFN38 1000	6.3-10	10	20	40	1	0.160
RFN38 1400	9-14	16	32	50	1	0.160
RFN38 1800	13-18	25	40	70	1	0.160
RFN38 2300	17-23	25	50	90	1	0.160
RFN38 2500	20-25	32	50	100	1	0.160
RFN38 3200	24-32	40	63	125	1	0.160
RFN38 3800	32-38	45	63	150	1	0.160
MANUAL RESETTING. Direct mounting on BF50-BF110 contactors. Complete with G261 links. Independent mounting with G270 base.						
11 RFN95 3 42	28 - 42	45	80	150	1	0.365
11 RFN95 3 50	35 - 50	50	100	175	1	0.365
11 RFN95 3 65	46 - 65	80	125	200	1	0.365
11 RFN95 3 82	60 - 82	100	200	250	1	0.365
11 RFN95 3 95	70 - 95	100	200	350	1	0.365
11 RFN95 3 110	90 - 110	125	200	350	1	0.365
AUTOMATIC RESETTING. Direct mounting on BF50-BF110 contactors. Complete with G261 links. Independent mounting with G270 base.						
11 RFNA95 3 42	28 - 42	45	80	150	1	0.365
11 RFNA95 3 50	35 - 50	50	100	175	1	0.365
11 RFNA95 3 65	46 - 65	80	125	200	1	0.365
11 RFNA95 3 82	60 - 82	100	200	250	1	0.365
11 RFNA95 3 95	70 - 95	100	200	350	1	0.365
11 RFNA95 3 110	90 - 110	125	200	350	1	0.365

❶ UL RK5 fuse class for RF38 types and UL K5 fuse class for RF…95 types.

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when across the line starting is considered.

Three-phase IEC motor powers ❸

230V [kW]	400V [kW]	415V [kW]	440V [kW]	550V [kW]	690V [kW]
❷	❷	❷	❷	❷	0.06
❷	0.06	0.06	0.06-0.09	0.06-0.09	0.09-0.12
0.06	0.09	0.09	0.12	0.12	0.18
0.09	0.12-0.18	0.12-0.18	0.18	0.18	0.25
0.12	0.25	0.25	0.37	0.25-0.37	0.37-0.55
0.18-0.25	0.37-0.55	0.37-0.55	0.55	0.55-0.75	0.75
0.37	0.75	0.75	0.75-1.1	1.1	1.1-1.5
0.55-0.75	1.1-1.5	1.1-1.5	1.1	1.5-2.2	2.2-3
1.1-1.5	2.2	2.2	2.2-3	3	4
1.5-2.2	3-4	4	4	4-5.5	5.5-7.5
3	5.5	5.5	5.5-7.5	5.5-7.5	11
4	7.5	7.5-9	9	11	15
5.5	11	9-11	11	11	18.5
5.5	11	11	11	15	22
7.5	15	15	15	18.5	30
11	18.5	18.5	18.5	22	30
9-10	15-18.5	18.5-22	18.5-22	22-25	30-33
10-11	22	25	25	30	37-40
15-18.5	25-30	30-33	30-33	33-40	45-55
22	33-40	37-45	37-45	45-55	59-75
22-25	40-45	45-51	45-55	55-63	75-80
30	55	55	55	75	90
9-10	15-18.5	18.5-22	18.5-22	22-25	30-33
10-11	22	25	25	30	37-40
15-18.5	25-30	30-33	30-33	33-40	45-55
22	33-40	37-45	37-45	45-55	59-75
22-25	40-45	45-51	45-55	55-63	75-80
30	55	55	55	75	90

❷ No standard power ratings exist; select relay according to current consumption.

❸ The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

Certifications and compliance

Certifications obtained:

Type	c UL us	CSA	GOST	CCC
RFN38	●	—	●	●
RFN95	●	●	●	●
RFNA95	●	●	●	●

● Certified products.

cULus – UL Listed for USA and Canada (File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 82A FLA range and 10000 Amps RMS for 95A and 110A FLA range; the trip current is 120% FLA.
CSA – CSA certified for Canada (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.

Phase failure / single phase sensitive Three poles (three phase)



RF200... - RF420...

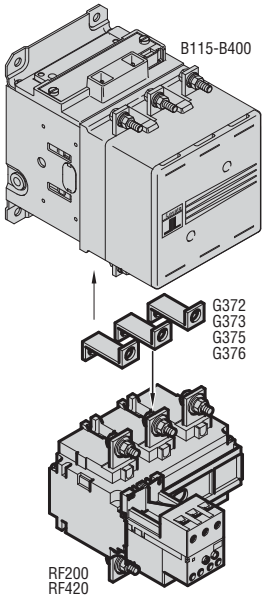

Order code	Adjustment range	Protection fuses IEC aM	IEC gG	UL K5	Qty per pkg	Wt
	[A]	[A]	[A]	[A]	n°	[kg]
MANUAL OR AUTOMATIC RESETTING. Independent screw fixing or direct mounting on contactors: B115-B145-B180 using G372 links B250-B310-B400 using G373 links						
RF200 100	60-100	100	160	500	1	2.150
RF200 125	75-125	125	200	500	1	2.150
RF200 150	90-150	160	250	500	1	2.150
RF200 200	120-200	200	315	500	1	2.150
Independent screw fixing or direct mounting on contactors: B145-B180 using G375 links B250-B310-B400 using G376 links						
RF420 250	150-250	250	400	800	1	2.460
RF420 300	180-300	315	500	800	1	2.460
RF420 420	250-420	400	630	800	1	2.460

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when across the line starting is considered.

RELAYS FOR B500 AND B630 CONTACTORS

MANUAL OR AUTOMATIC RESETTING.
Consult Customer Service for the relative order codes and detailed information; see contact details on inside front cover.

Three-phase IEC motor powers❶

230V [kW]	400V [kW]	415V [kW]	440V [kW]	550V [kW]	690V [kW]
18.5-25	33-51	37-55	37-59	45-63	59-92
22-37	40-63	45-63	51-75	55-80	75-110
25-45	51-80	55-80	55-92	63-100	92-140
37-59	75-100	75-100	75-110	92-140	129-184
45-75	92-132	92-147	100-150	110-162	140-220
55-92	100-162	110-162	129-184	129-198	180-280
75-110	129-198	147-220	150-220	180-280	250-368

NOTE: For 1000V powers, consult Customer Service for information; see contact details on inside front cover.

❶ The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

Certifications and compliance
Certifications obtained:

Type	c UL us	GOST
RF200	●	●
RF420	●	●

● Certified products.

cULus – UL Listed for USA and Canada (File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 150A FLA range, 10000 Amps RMS for 200A up to 300A FLA range and 18000 Amps for the 420A; the trip current is 120% FLA.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.

Non phase failure / non single phase sensitive Three poles (three phase)



RFN200... - RFN420...

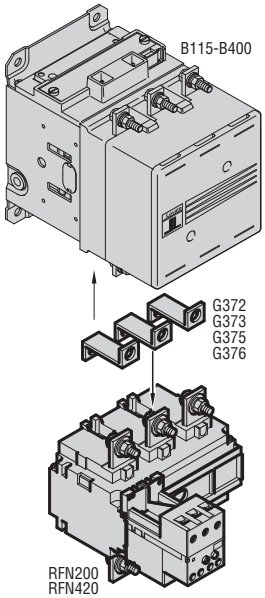

Order code	Adjustment range	Protection fuses IEC aM	IEC gG	UL K5	Qty per pkg	Wt
	[A]	[A]	[A]	[A]	n°	[kg]
MANUAL OR AUTOMATIC RESETTING. Independent screw fixing or direct mounting on contactors: B115-B145-B180 using G372 links B250-B310-B400 using G373 links						
RFN200 100	60-100	100	160	500	1	2.150
RFN200 125	75-125	125	200	500	1	2.150
RFN200 150	90-150	160	250	500	1	2.150
RFN200 200	120-200	200	315	500	1	2.150
Independent screw fixing or direct mounting on contactors: B145-B180 using G375 links B250-B310-B400 using G376 links						
RFN420 250	150-250	250	400	800	1	2.460
RFN420 300	180-300	315	500	800	1	2.460
RFN420 420	250-420	400	630	800	1	2.460

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when across the line starting is considered.

RELAYS FOR B500 AND B630 CONTACTORS.

MANUAL OR AUTOMATIC RESETTING.
Consult Customer Service for the relative order codes and detailed information; see contact details on inside front cover.

Three-phase IEC motor powers❶

230V [kW]	400V [kW]	415V [kW]	440V [kW]	550V [kW]	690V [kW]
18.5-25	33-51	37-55	37-59	45-63	59-92
22-37	40-63	45-63	51-75	55-80	75-110
25-45	51-80	55-80	55-92	63-100	92-140
37-59	75-100	75-100	75-110	92-140	129-184
45-75	92-132	92-147	100-150	110-162	140-220
55-92	100-162	110-162	129-184	129-198	180-280
75-110	129-198	147-220	150-220	180-280	250-368

NOTE: For 1000V powers, contact our Customer Service (Tel. +39 035 4282422; email: service@LovatoElectric.com).

❶ The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

Certifications and compliance
Certifications obtained:

Type	c UL us	GOST
RFN200	●	●
RFN420	●	●

● Certified products.

cULus – UL Listed for USA and Canada (File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 150A FLA range, 10000 Amps RMS for 200A up to 300A FLA range and 18000 Amps for the 420A; the trip current is 120% FLA.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.



RFX38 02



RFX38 03



11 G262



RFX38 04



11 G228



11 G244

Order code	For relay		Qty per pkg	Wt
			n°	[kg]
Set of links for direct contactor mounting.				
11 G372	RF...200 on contactor	B115-B145-B180	1	0.250
11 G373		B250-B310-B400	1	0.360
11 G375	RF...420 on contactor	B145-B180	1	0.313
11 G376		B250-B310-B400	1	0.500
Protection cover for thermal overload relay-contactor assembly.				
RFX38 02	RF38 on contactor BF09 - BF12 - BF18 - BF25		10	0.014
RFX38 03	RF38 on contactor BF26- BF32 - BF38		10	0.014
Protection shrouds for power terminals.				
11 G262❶	For RF...95...3		10	0.003
11 G361	RF...200		6	0.026
11 G363	RF...420		6	0.046
Independent mounting. Screw fixing or 35mm DIN rail (IEC/EN 60715) mounting.				
RFX38 04	RF...38		5	0.082
11 G270❷	RF...95		10	0.148
Electrical reset.				
11 G228❸	RF...9 - RF...95		5	0.072
Sealing device.				
RFX38 01	RF...38 - RF...200 - RF...420		10	0.002
11 G233	RF...9 - RF...95		1	0.006
Electric button NO.				
11 G244	RF...9 - RF...95		10	0.011
Marking element.				
11 RB6	RF...9 - RF...95		100	0.003
Set of 100 alphanumeric symbol.				
3958❹	RF...9 - RF...95		1	0.002

❶ Front IP20 protection is warranted to contactor-thermal relay connections.
❷ Independent mounting base for any RF95 relay.
Remove the links fixed on RF...95 and use those supplied with the base.
❸ Replace with voltage digit.
Standard voltages are:
– AC 50/60Hz 24V / 48V / 110-125V / 220-240V / 380-415V.
❹ Replace with the required alphanumeric symbol.
Each package contains 100 pieces of the same symbol.

Electrical reset (G228) operational characteristics

Control circuit voltage AC (50/60Hz)	V	12 - 550
Power consumption in AC	VA	300
Minimum reset time	ms	20

NOTE: Coils can remain supplied for a maximum interval of 500ms; 3 consecutive operations are allowed, followed by a 5 minute interval.
It is recommended to use the wiring diagram on page 3-11.

Certifications and compliance
Certifications obtained:

Tipo	c U L u s	C S A	G O S T
G361	—	●	●
G363	—	●	●
G372	—	●	●
G373	—	●	●
G375	—	●	●
G376	—	●	●
G270	●	—	●
RFX38 04	●	—	●

● Certified products.

cULus – UL Listed for USA and Canada (File E93601) as Auxiliary Devices for thermal overload relays.
CSA – CSA certified for Canada (File 54332) as Kits for industrial control equipment.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.

Combinations

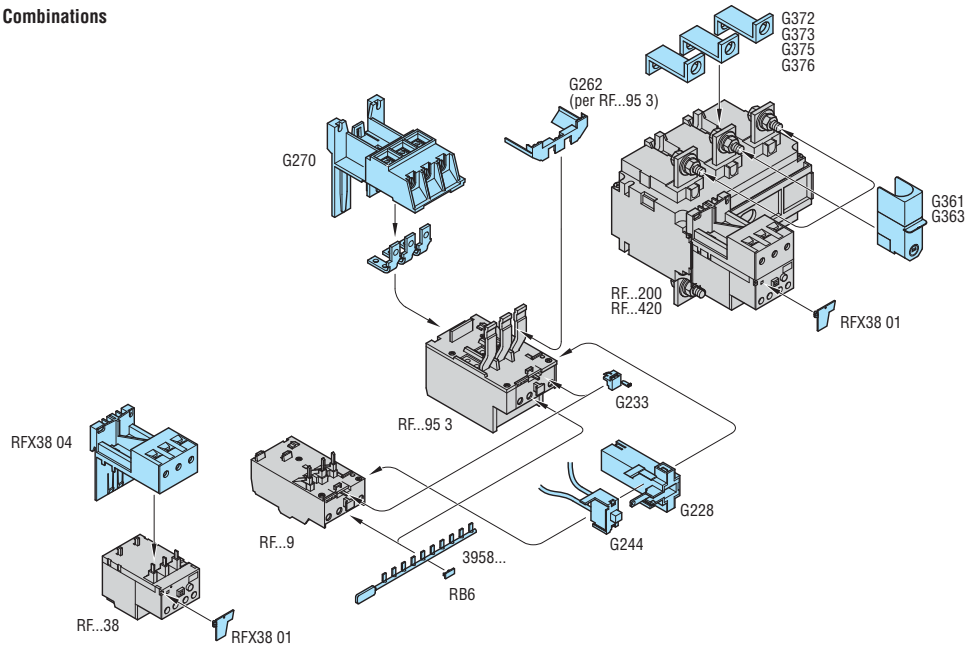

Protection cover for thermal overload relay-contactor assembly

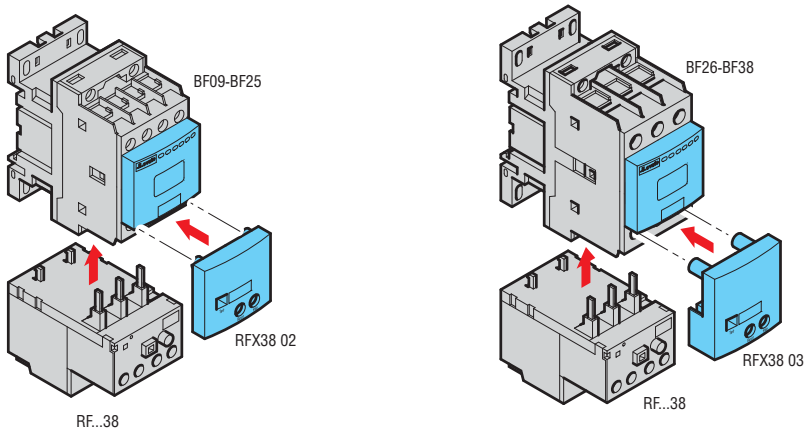

Thermistor protection relay



31 DRPT...

Order code	Rated auxiliary supply voltage	Qty per pkg	Wt.
	[V]	n°	[kg]
DC supply (version for 35 mm DIN rail IEC/EN 60715).			
31 DRPTC 24	24VDC❶	1	0.269
AC supply (version for 35 mm DIN rail IEC/EN 60715).			
31 DRPT 24	24VAC	1	0.269
31 DRPT 110	110VAC	1	0.269
31 DRPT 220	220-240VAC	1	0.269
ACCESSORY			
Order code	Description	Qty per pkg	Wt
		n°	[kg]
31 CE106	Adapter for screw fixing of DRPT relay on mounting plate.	10	0.008

❶ Galvanic isolation between supply and internal circuit does not exist.

General characteristics
The DRPT is a thermal protection relay of motors equipped with thermistor PTC sensors immersed in the winding heads. The maximum number of thermistors to be used is limited by the resistance of all the sensors connected in series; total ohmic value is not to exceed 1.5kΩ at 25°C.
The DRPT type has fail-safe operation: the protective feature trips even in the case the PTC circuit is disconnected or there is a lack of voltage.

Operational characteristics
- Supply circuit
  - Rated frequency: 50-60Hz for AC types only
  - Operational limits: 0.85-1.1 Us
  - Maximum dissipation: 2.5W
  - Connection: permanent.
- Measuring circuit
  - Type of connectable PTC sensor: According to DIN 44081
  - Total PTC resistance at 25°C: ≤1.5kΩ
  - Tripping resistance: 2.7-3.1kΩ
  - Resetting resistance: 1.5-1.8kΩ
  - Voltage at PTC terminals: ≤ 2.5VDC.
- Remote resetting
  - Control: NC contact opening
  - Contact voltage: 5VDC
  - Current consumption: about 1mA.
- Output relay
  - Arrangement: 1 relay with 2 changeover contacts
  - Rated operational voltage Ue: 250VAC
  - Conventional free air thermal current Ith: 5A
  - Designation to IEC/EN 60947-5-1: B300
  - Mechanical life: $50x10^6$ cycles
  - Electrical life (with rated load): $2x10^5$ cycles.
- Indications
  - Green LED indicator for power ON
  - Red LED indicator for relay state TRIP
- Ambient conditions
  - Operating temperature: -10...+60°C
  - Storage temperature: -30...+80°C.
- Housing
  - Snap on 35mm DIN rail (IEC/EN 60715)
  - For screw fixing, use CE106 adapter
  - Degree of protection
    - IP40 housing
    - IP20 terminals.

Certifications and compliance
Certifications obtained: GOST.
Compliant with standards: IEC/EN 60255-5.

3

RFX38 04 base c/w RF...38 thermal relay

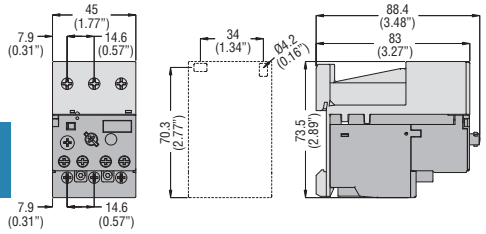

G270 base c/w RF...95 thermal relay

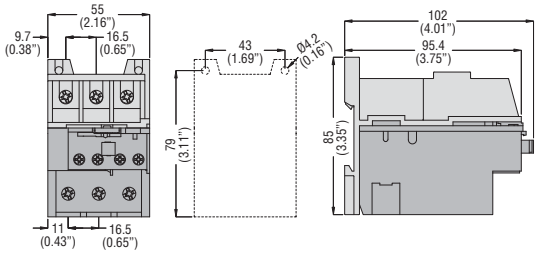

RF...200 thermal relay with links

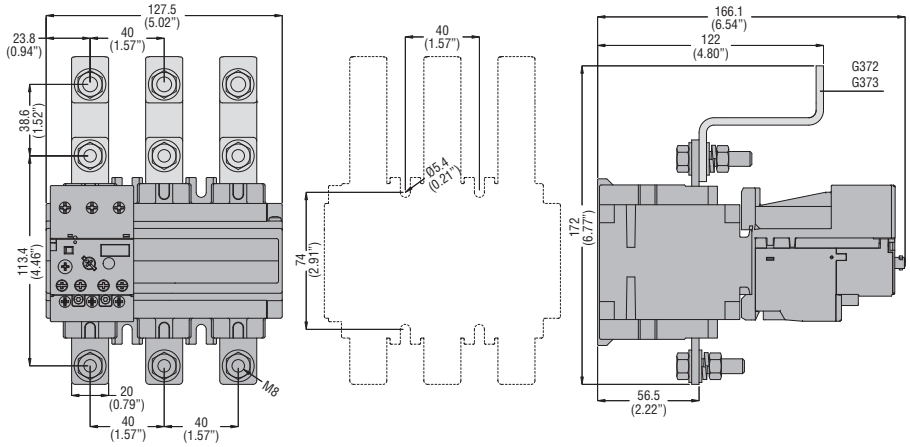

RF...420 thermal relay with links

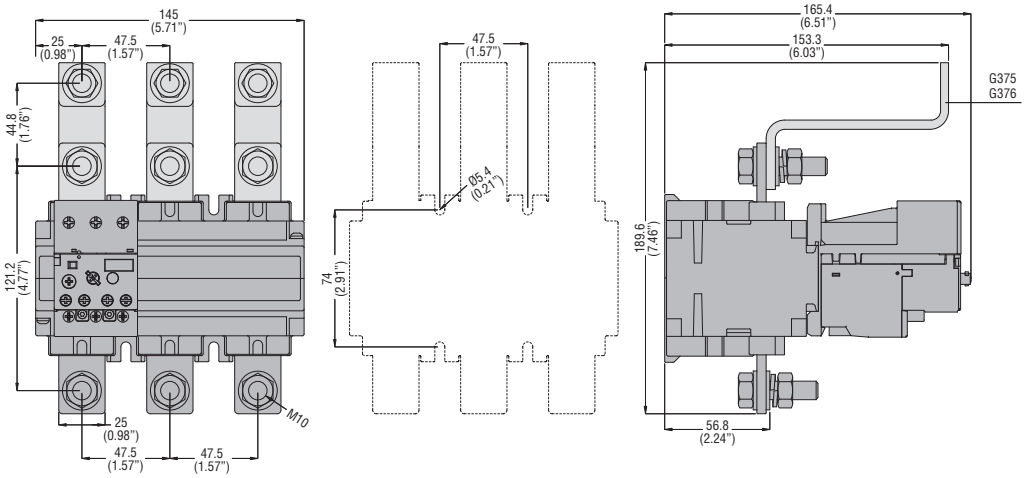

ADD-ON BLOCKS FOR THERMAL OVERLOAD RELAYS RF...9 and RF...95

G228... reset

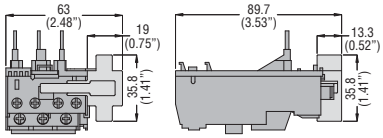

G244 button



THERMISTOR PROTECTION RELAY

DRPT relay



CE106 adapter



THERMAL OVERLOAD RELAYS FOR BG MINI-CONTACTORS

RF9 - RFN9



RFA9 - RFNA9



THERMAL OVERLOAD RELAYS FOR BF CONTACTORS

RF38 - RFN38



RF95 - RFN95



RFA95 - RFNA95



THERMAL OVERLOAD RELAYS FOR B CONTACTORS

RF200 - RFN200
RF420 - RFN420

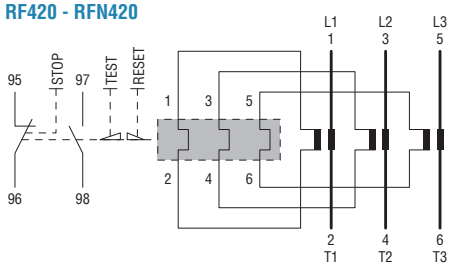

ADD-ON BLOCKS FOR THERMAL OVERLOAD RELAYS RF9 - RF95

Electric reset

G228

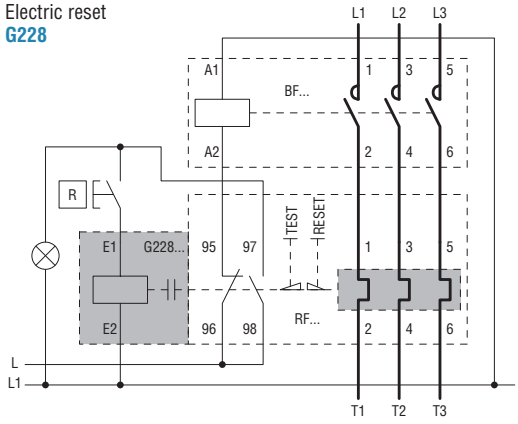

THERMISTOR PROTECTION RELAY

DRPT

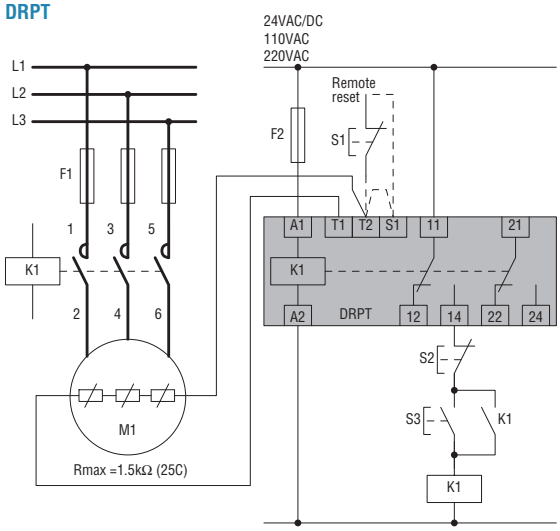

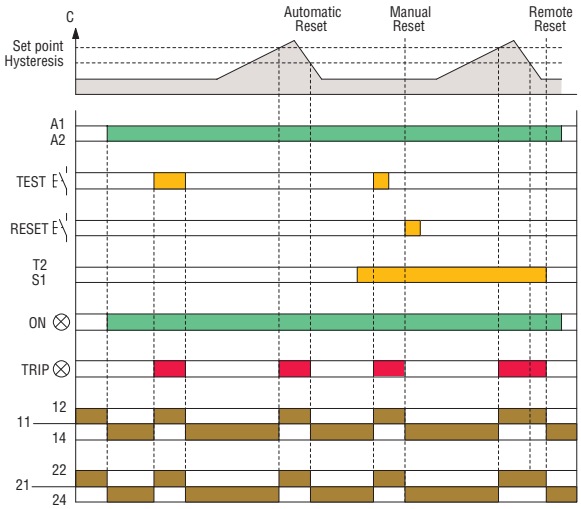

3

Phase failure/single phase sensitive hand reset Phase failure sensitive automatic reset Non phase failure/non single phase sensitive hand reset Non phase failure/non single phase sensitive automatic reset			**RF9 RFA9 RFN9 RFNA9**	**RF38❶ RFN38❶**	**RF95 RFA95 RFN95 RFNA95**	**RF200❶ RFN200❶**	**RF420❶ RFN420❶**
POWER CIRCUIT CHARACTERISTICS							
IEC rated insulation voltage Ui		V	690	690	690	1000	1000
IEC rated impulse withstand voltage Uimp	kV	8	6	8	6	6	
Frequency limit		Hz	0-400	0-400	0-400	50-60	50-60
Operational range	from	A	0.09	0.1	14	60	150
	to	A	15	38	110	200	420 ❷
Tripping class			10A				
Particular characteristics			Test button - Trip indicator				
Connection			Direct			With current transformers ❸	
Terminals	Type		Screw and washer		Yoke clamp	Screw and flat washer	
	Screw		M4	M4	M5	M8	M10
	Terminal width	mm	9.8	12.6	9	20	25
	Phillips	n°	2	2	2	13mm❹	18mm❹
Tightening torque for power terminals		Nm	2.3	2...2.5	3.9	18	35
		lbft	1.7	1.5...1.8	2.88	13.3	25.9
Maximum conductor section connectable							
	AWG	N°	10	8	2	–	–
	Flexible w/o lug	mm^2	6	10	35	–	–
	Flexible c/w lug	mm^2	10	6	–	150	2 x 150
	Bar	mm	–	–	–	25 x 3	30 x 5
Dissipation per phase		W	0.7-2.4	0.7-2.4	2.0-4.2	0.7-2.4	0.7-2.4
AUXILIARY CIRCUIT CHARACTERISTICS							
Available contacts	NO	n°	1				
	NC	n°	1				
IEC rated insulation voltage		V	690				
IEC conventional free air thermal current Ith		A	10				
Terminals with screw and washer	Screw		M3.5				
	Terminal width	mm	8				
	Phillips	n°	1	2	1	2	2
Maximum conductor section connectable							
	Flexible w/o lug	mm^2	2.5				
	Flexible c/w lug	mm^2	2.5				
Tightening torque for auxiliary terminals		Nm	1	0.8...1	1	0.8...1	0.8...1
		lbft	0.74	0.59...0.74	0.74	0.59...0.74	0.59...0.74
UL/CSA and IEC/EN 60947-5-1 designation			B600 - P600 ❺	B600-R300	B600-P600 ❺	B600-R300	B600-R300
AMBIENT CONDITIONS							
Operating temperatureo		°C	-20...+55	-25...+60	-20...+55	-25...+60	-25...+60
Storage temperature		°C	-55...+70	-50...+70	-55...+70	-50...+70	-50...+70
Compensation temperature		°C	-15...+55	-20...+60	-15...+55	-20...+60	-20...+60
Maximum altitude		m	3000				
Operation position	Normal		On vertical plane				
	Allowable		±30°				
Mounting			On contactor or separately				

❶ With manual and automatic resetting.
❷ For currents higher than 420A, consult Customer Service for information; see contact details on inside front cover.
❸ Standard supplied.
❹ Metric wrench/spanner.
❺ C600-R300 for automatic reset type.

TRIP CHARACTERISTIC FOR RF THERMAL OVERLOAD RELAYS (AVERAGE TIME)

Three-phase balanced operation

RF9 RF38 RF95
RFA9 RFN38 RFA95
RFN9 RFN95
RFNA9 RFNA95

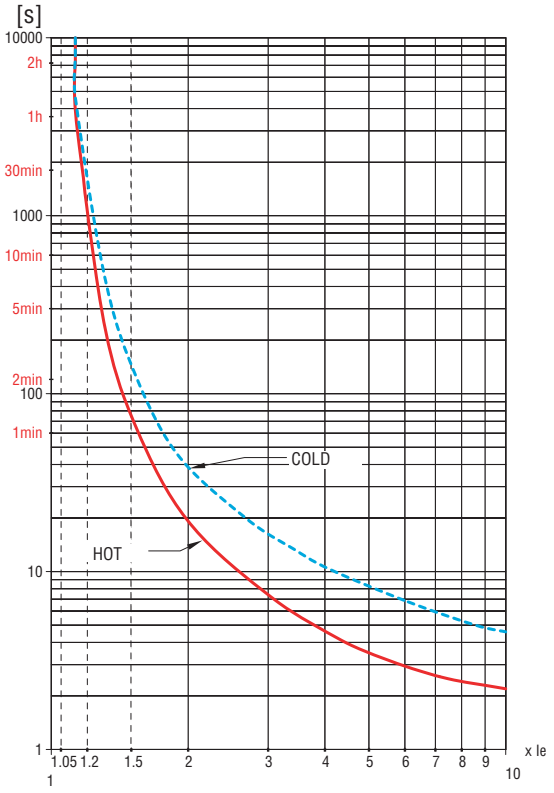

Two-phase operation (phase failure/single phase)

RF9 RF38 RF95
RFA9 RFA95

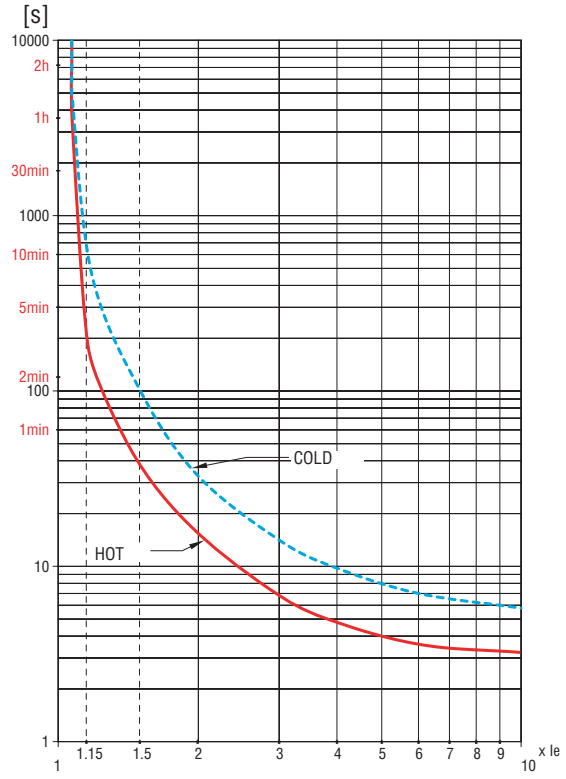

RF200 RF420
RFN200 RFN420

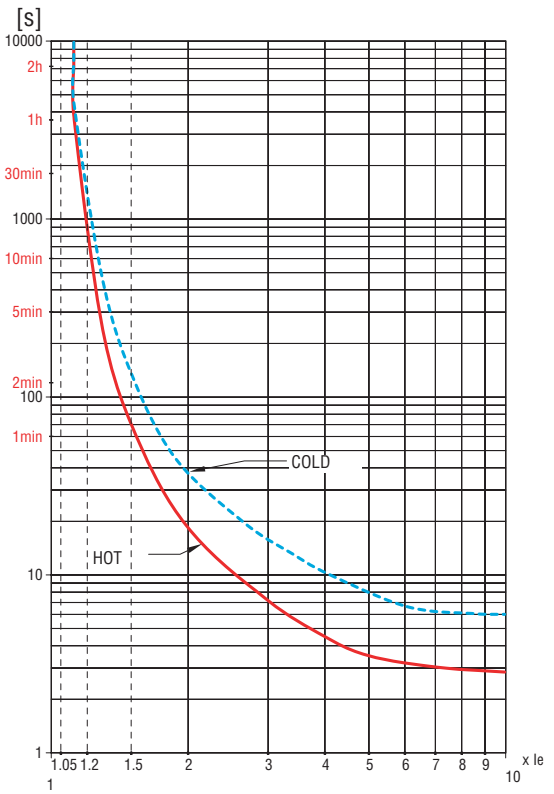

RF200 RF420

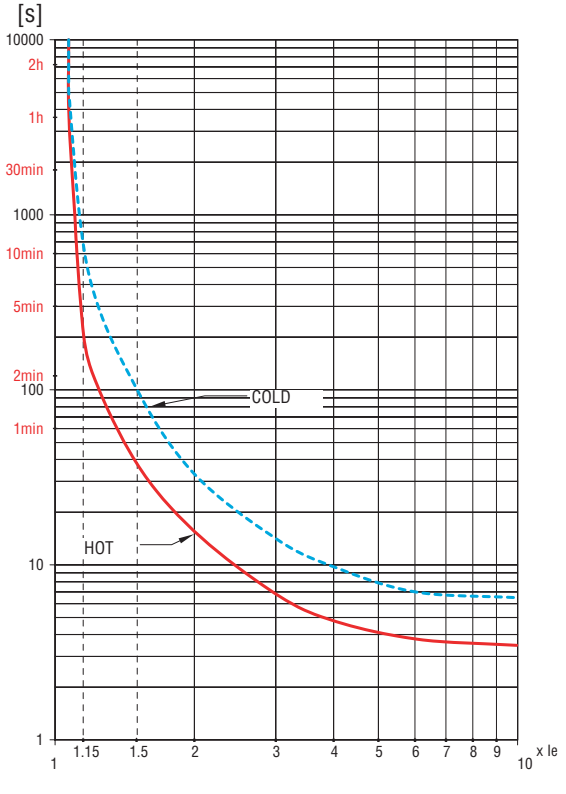

Tripping times can have a ±20% deviation with respect to the average tripping curve values above.