

Retroreflective sensor (glass)

OBG8000-R200-2EP-IO-V15




- Medium design with versatile mounting options
- Detects transparent objects, i.e., clear glass, PET and transparent films
- Two machines in one: clear object detection or reflection operating mode with long range
- High degree of protection IP69K
- IO-Link interface for service and process data

Retroreflective sensor with polarization filter for clear object detection

Function

The optical sensors in the series are the first devices to offer an end-to-end solution in a medium-sized standard design – from the thru-beam sensor through to the measuring distance sensor. As a result of this design, the sensors are able to perform practically all standard automation tasks.
The entire series enables sensors to communicate via IO-Link.
The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.
Multi Pixel Technology (MPT) ensures that the standard sensors are flexible and can be adapted to the application environment.

Dimensions

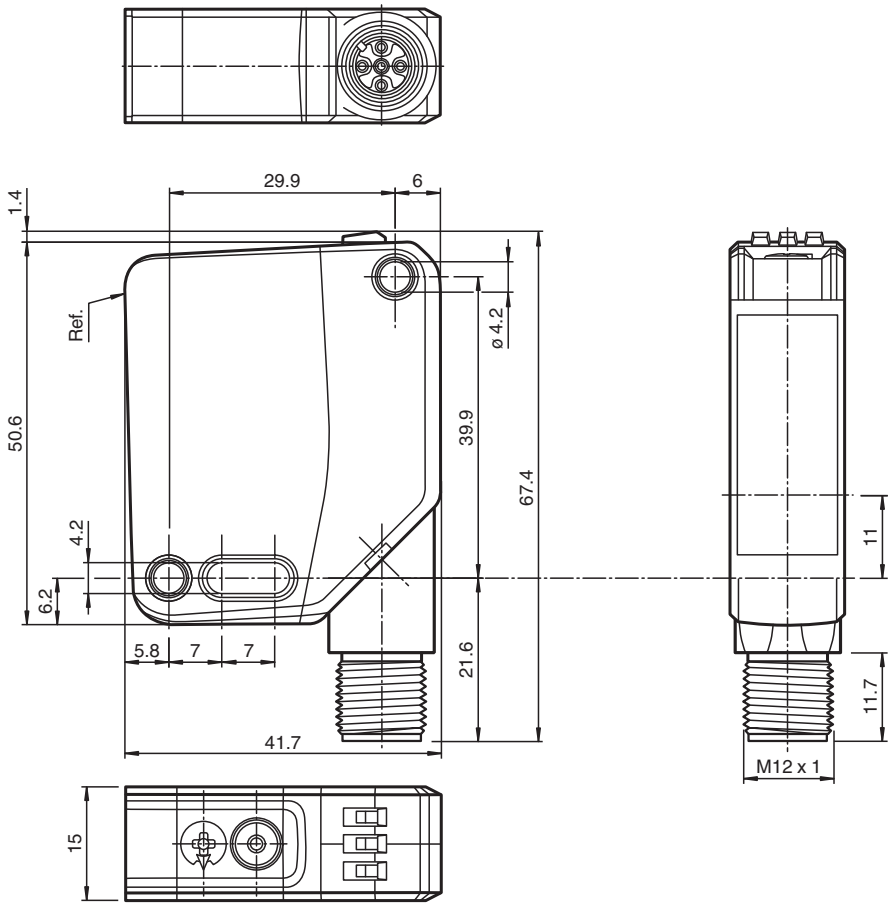

Release date: 2023-05-09 Date of issue: 2023-05-09 Filename: 295670-100149_eng.pdf

Technical Data


General specifications		
Effective detection range		0 ... 5.6 m in TEACH mode ; 0 ... 8 m at switch position "N"
Reflector distance		0 ... 5.6 m in TEACH mode ; 0 ... 8 m at switch position "N"
Threshold detection range		9 m
Reference target		H85-2 reflector
Light source		LED
Light type		modulated visible red light
LED risk group labelling		exempt group
Polarization filter		yes
Diameter of the light spot		approx. 170 mm at a distance of 3.5 m
Opening angle		approx. 5 °
Ambient light limit		EN 60947-5-2 : 18000 Lux
Functional safety related parameters		
$MTTF_d$		600 a
Mission Time (T_M)		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green: constantly on - power on flashing (4Hz) - short circuit flashing with short break (1 Hz) - IO-Link mode
Function indicator		Yellow LED: Permanently lit - light path clear Permanently off - object detected Flashing (4 Hz) - insufficient operating reserve
Control elements		Teach-In key
Control elements		5-step rotary switch for operating modes selection
Contrast detection levels		10 % - clean, water filled PET bottles 18 % - clear glass bottles 40 % - colored glass or opaque materials Adjustable via rotary switch
Electrical specifications		
Operating voltage	U_B	10 ... 30 V DC
Ripple		max. 10 %
No-load supply current	I_0	< 25 mA at 24 V supply voltage
Protection class		III
Interface		
Interface type		IO-Link (via C/Q = pin 4)
IO-Link revision		1.1
Device profile		Identification and diagnosis Smart Sensor type 2.4
Device ID		0x111A03 (1120771)
Transfer rate		COM2 (38.4 kBit/s)
Min. cycle time		2.3 ms
Process data width		Process data input 2 Bit Process data output 2 Bit
SIO mode support		yes
Compatible master port type		A
Input		
Test input		emitter deactivation at $+U_B$
Output		
Switching type		The switching type of the sensor is adjustable. The default setting is: C/Q - Pin4: NPN normally open / dark-on, PNP normally closed / light-on, IO-Link /Q - Pin2: NPN normally closed / light-on, PNP normally open / dark-on
Signal output		2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected
Switching voltage		max. 30 V DC
Switching current		max. 100 mA , resistive load

Release date: 2023-05-09 Date of issue: 2023-05-09 Filename: 295670-100149_eng.pdf


Technical Data

Usage category		DC-12 and DC-13
Voltage drop	U_d	≤ 1.5 V DC
Switching frequency	f	500 Hz
Response time		1 ms
Conformity		
Communication interface		IEC 61131-9
Product standard		EN 60947-5-2
Approvals and certificates		
UL approval		E87056 , cULus Listed , class 2 power supply , type rating 1
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Storage temperature		-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications		
Housing width		15 mm
Housing height		50.6 mm
Housing depth		41.7 mm
Degree of protection		IP67 / IP69 / IP69K
Connection		5-pin, M12 x 1 connector, 90° rotatable
Material		
Housing		PC (Polycarbonate)
Optical face		PMMA
Mass		approx. 37 g
Cable length		0.3 m

Connection



Connection Assignment




Wire colors in accordance with EN 60947-5-2


1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)
5	GY	(gray)

Release date: 2023-05-09 Date of issue: 2023-05-09 Filename: 295670-100149_eng.pdf

Assembly

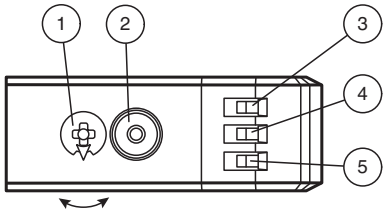


1	Mode rotary switch	
2	Teach-in button	
3	Operating indicator/dark-on	GN
4	Function indicator	YE
5	Operating indicator/light-on	GN




N	Normal operation
I	10 % contrast detection
II	18 % contrast detection
III	40 % contrast detection
L/D	Switching type
0	Keylock

Characteristic Curve

Characteristic response curve

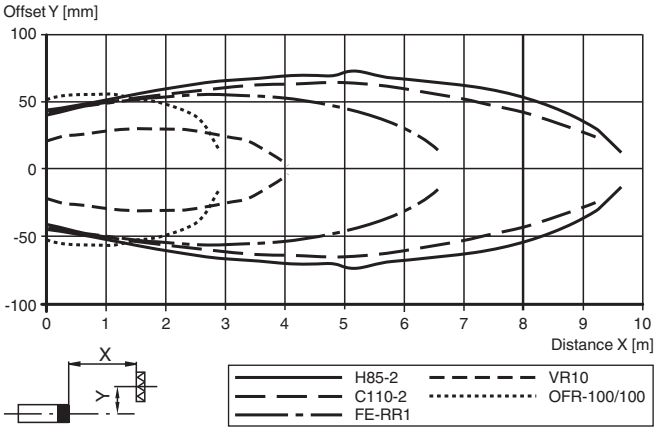

Relative received light strength in switch position "N" (typical)

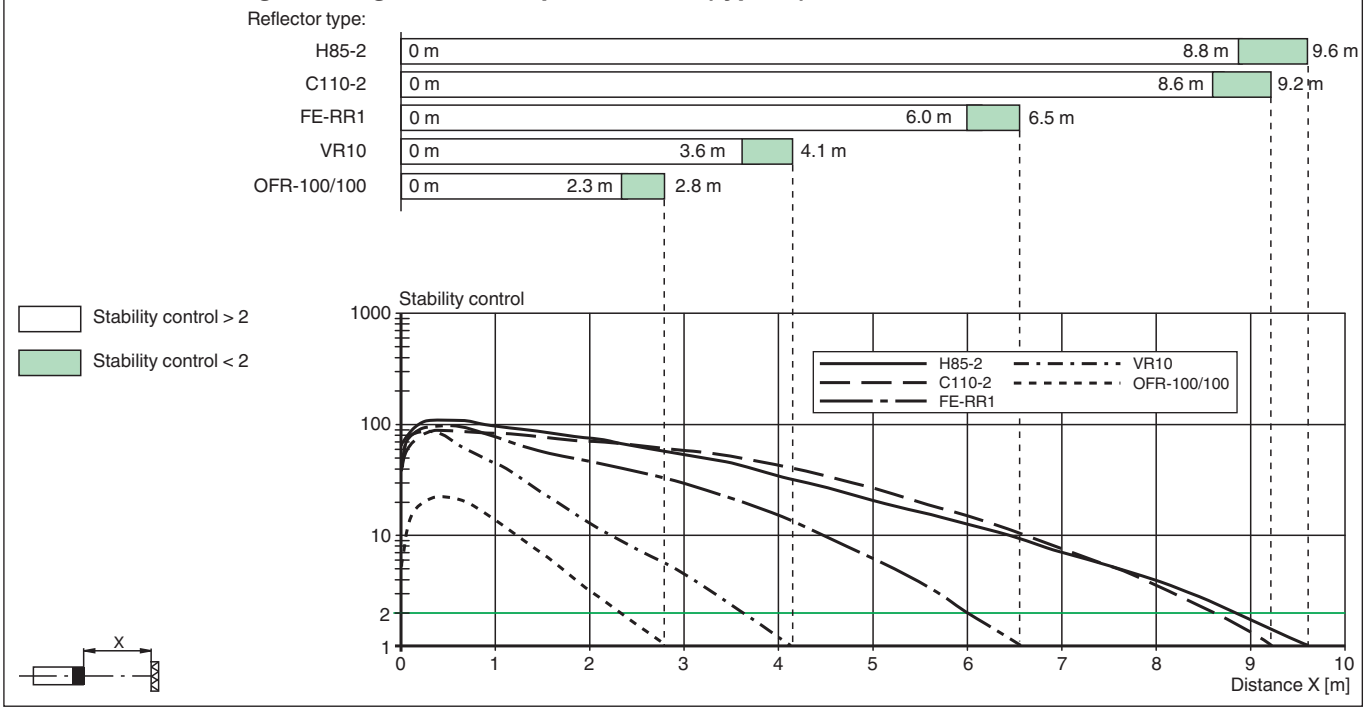

Release date: 2023-05-09 Date of issue: 2023-05-09 Filename: 295670-100149_eng.pdf

Commissioning

Teach-in
Use the rotary switch to select the required operating mode: Normal mode (N) or contrast level I – III.
To teach in a threshold or activate an operating mode, press the "TI" button until the yellow and green LEDs flash in phase (approx. 1 s). Release the "TI" button. Teach-in starts.
Successful teach-in is indicated by alternating flashing (2.5 Hz) of the yellow and green LEDs. The sensor will now operate in the selected operating mode with the taught-in threshold.
An unsuccessful teach-in is indicated by rapidly alternating flashing (8 Hz) of the yellow and green LEDs. After an unsuccessful teach-in, the sensor continues to operate with the previous valid setting after the relevant visual fault signal is issued.
Every taught-in switching threshold can be re-taught (overwritten) by pressing the "TI" button again.
Note: To ensure that the device functions reliably in Contrast mode, the device must be powered on at least 30 s before teach-in.

Setting the Device to Maximum Sensitivity
- Use the rotary switch to select the Normal mode (N) position.
- Press the "TI" button for > 4 s. The yellow and green LEDs will go out.
- Release the "TI" button.

The settings will be reset to maximum sensitivity. After successfully resetting, the yellow and green LEDs will flash alternately (2.5 Hz).

Switching between light on/dark on
- Use the rotary switch to select the light on/dark on (L/D) position.
- Press the "TI" button for > 1 s.The respective operating indicator LED (L/D) will illuminate green and the switching type will change.
- To reset the switching type, press the "TI" button for > 4 s.The respective operating indicator LED (L/D) will illuminate green and the operating indicator will be reset to the most recently active switching type.

Reset to Default Settings
- Use the rotary switch to select the O position.
- Press the "TI" button for > 10 s. The yellow and the green LEDs will both switch off.
- Release the "TI" button. The yellow LED is on.After resetting, the sensor will operate with the following default settings:

Accessories

	**REF-ORR50G-2**	Reflector
	**V15-W-2M-PUR**	Female cordset single-ended M12 angled A-coded, 5-pin, PUR cable grey
	**V15-G-2M-PUR**	Female cordset single-ended M12 straight A-coded, 5-pin, PUR cable grey
	**V1-G-2M-PUR**	Female cordset single-ended M12 straight A-coded, 4-pin, PUR cable grey
	**V1-W-2M-PUR**	Female cordset single-ended M12 angled A-coded, 4-pin, PUR cable grey
	**REF-H85-2**	Reflector, rectangular 84.5 mm x 84.5 mm, mounting holes
	**REF-C110-2**	Reflector, round ø 84 mm, central mounting hole
	**FE-RR1**	Reflector, round ø 80.87 mm, central mounting hole
	**REF-VR10**	Reflector, rectangular 60 mm x 19 mm, mounting holes
	**OFR-100/100**	Reflective tape 100 mm x 100 mm
	**REF-H32G-2**	Reflector
	**OMH-MLV12-HWG**	Mounting bracket for series MLV12 sensors
	**OMH-R200-01**	Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm

Release date: 2023-05-09 Date of issue: 2023-05-09 Filename: 295670-100149_eng.pdf

Accessories

	**OMH-MLV12-HWK**	Mounting bracket for series MLV12 sensors
	**OMH-R20x-Quick-Mount**	Quick mounting accessory
	**ICE2-8IOL-G65L-V1D**	EtherNet/IP IO-Link master with 8 inputs/outputs
	**ICE3-8IOL-G65L-V1D**	PROFINET IO IO-Link master with 8 inputs/outputs
	**ICE2-8IOL-K45S-RJ45**	EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, screw terminal
	**ICE3-8IOL-K45P-RJ45**	PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, push-in terminals
	**ICE3-8IOL-K45S-RJ45**	PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, screw terminal
	**IO-Link-Master02-USB**	IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection
	**ICE1-8IOL-G30L-V1D**	Ethernet IO-Link module with 8 inputs/outputs
	**ICE1-8IOL-G60L-V1D**	Ethernet IO-Link module with 8 inputs/outputs
	**ICE2-8IOL-K45P-RJ45**	EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, push-in connectors

Release date: 2023-05-09 Date of issue: 2023-05-09 Filename: 295670-100149_eng.pdf