Technical data

Pump name DWO 300

Customer	Date 19-May-2020	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

Requested data

1	Pump type	CENTRIFUGAL PUMPS	Fluid		Water, clean
2	Number of pumps / Reserve	1 / 0	Liquid temperature	K	293
3	Flow l/min	0	Kin. viscosity	mm²/s	1
4	Head m	0	Vapour pressure	kPa	2.2
5	Geodetic head m	0	PH value		7
6	Inlet pressure (pin) kPa	10	Density	kg/m³	1000
7	Available system NPSH	0	Solids	Weight %	0
8	Ambient temperature K	290			

Pump

9	Pump name	DWO 300	Frequency		Hz	50
10	Design	CENTRIFUGAL PUMPS	Installation type			STANDARD
11	Manufacturer	EPE	Impeller Diameter	Max.	mm	107
12	Speed 1/min	2800		Designed	mm	107
13	No. of Stage	1		Min.	mm	107
14	Connection Suction side		Flow	Operating	l/min	
15	Connection Discharge side			Max-	l/min	950
16	Max Working Pressure kPa	800		Min-	l/min	100
17	Shut-off head kPa	150.76	Head	Operating	m	
18	Total weight kg	See the table of "Dimensions".		- (Qmax.)	m	7.5
19	Shaft power kW			- (Qmin.)	m	15.0
20			Max. Shaft Power at max. impeller		kW	2.16
21	Required pump NPSH m		Efficiency		%	

Materials

22	Impeller	AISI 304		
23	Casing	AISI 304		
24	Shaft	AISI 304		
25				
26				
27				

Motor

28	Manufacturer	EPE Standard	Insulation class		F
29	Type	TEFC_DWO 300_230_Three Phase	Phases		3~
30	Specific design	IE3 / 50 Hz / Pole pairs 1	Frame size		
31	Rated power kW	2.2	Weight	kg	0
32	Number of poles	2	Electric voltage	V	230
33	Speed 1/min	2800	Electric current	A	8.2
34	Degree of protection	IP 55			
35					

Remarks

EBARA

Performance curve **Pump name** DWO 300

Customer	Date 19-May-2020	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

Requested data


1	Flow	l/min	0
2	Head	m	0
3	Geodetic head	m	0

Pump

Operating Flow	l/min		Frequency	Hz	50
Operating Head	m		Number of poles		2
Impeller Diameter	Designed mm	107	Speed	1/min	

Test standard: ISO 9906:2012 - Grade3B

Water, clean [100%] ; 293K; 998.3kg/m³; 1mm²/s

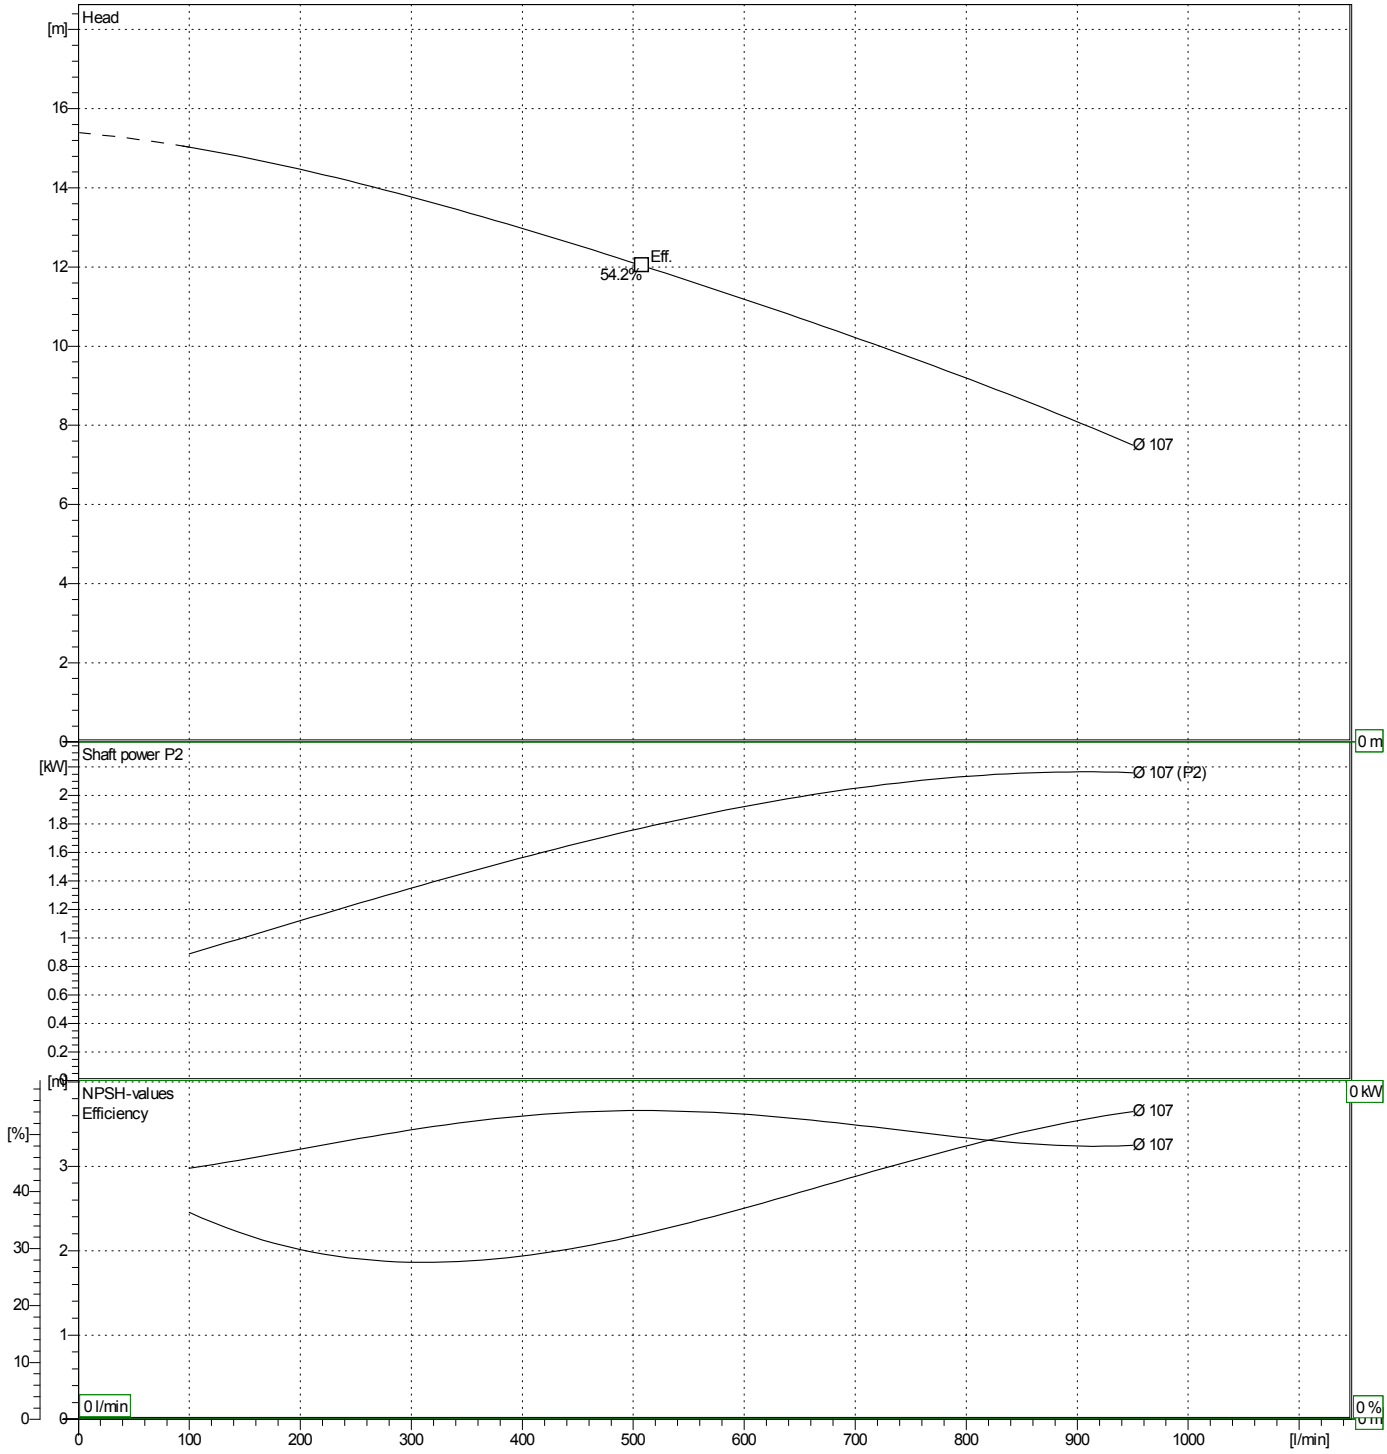


EBARA

Dimensions

Pump name DWO 300

Customer	Date 19-May-2020	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

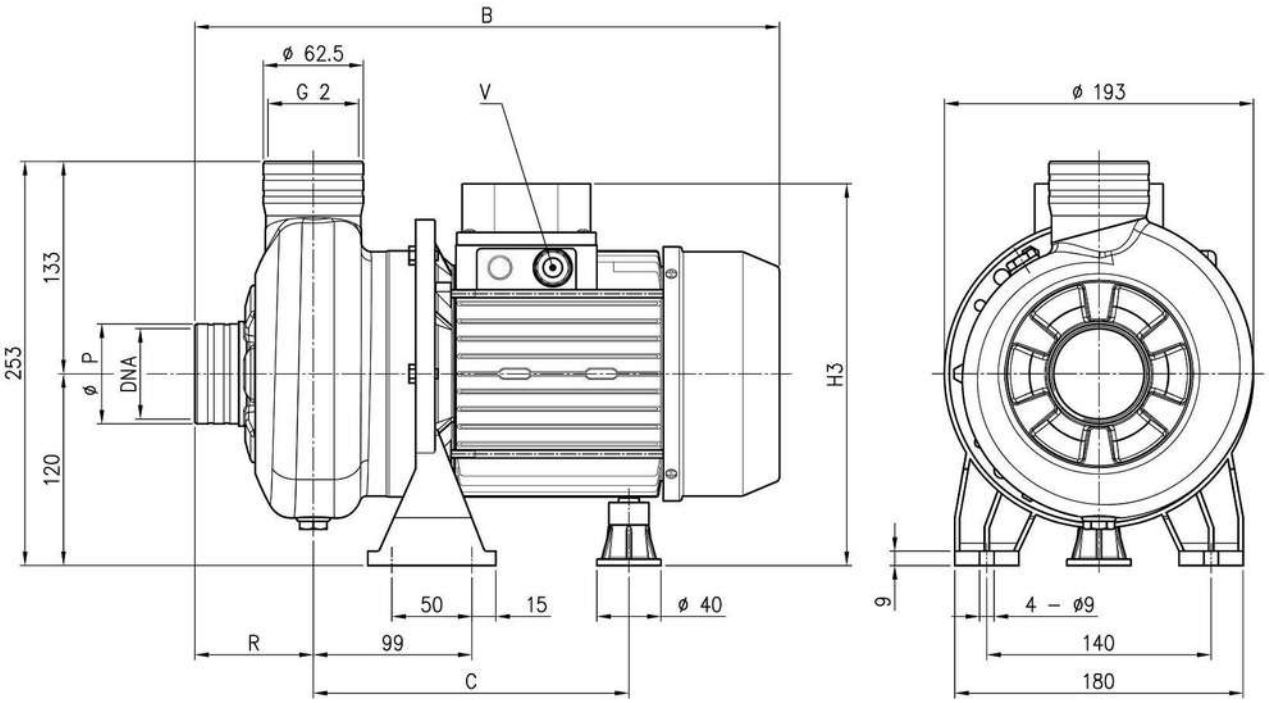


Dimensions in mm								
1	B	394.5						
2	C	197						
3	Dia P	80						
4	DNA	G 2 1/2						
5	R	78						
6	V	M20X1.5						
7	Weight P&M	19.4 kg						

EBARA

(1/3)
Construction

Pump name DWO 300

Customer	Date 19-May-2020	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

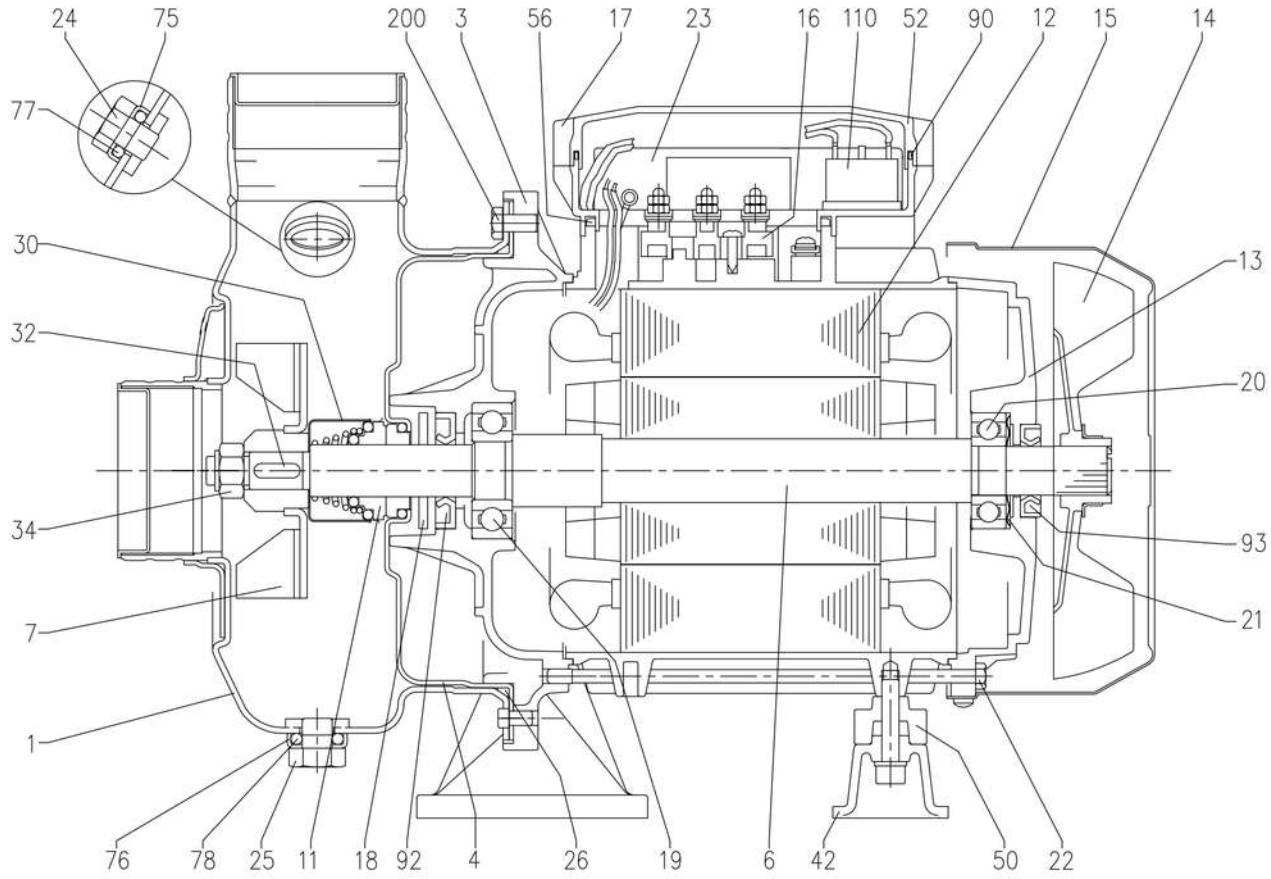

EBARA

(2/3)
Construction

Pump name DWO 300

Customer	Date 19-May -2020	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail


N°	PART NAME	MATERIAL	Q.TY
1	Casing	AISI 304	1
3	Motor bracket	Aluminium	1
4	Casing cover	AISI 304	1
6	Shaft with rotor	AISI 304 (Wet extention)	1
7	Impeller	AISI 304	1
11	Mechanical seal [3]	Carbon/Ceramic/NBR	1
12	Motor frame with stator	-	1
13	Motor cover	Aluminium	1
14	Fan	PP	1
15	Fan cover	Fe P04 Zincate	1
16	Terminal box	-	1
17	Terminal box cover [2]	Aluminium	1
18	Splash ring	NBR	1
19	Pump side ball bearing	-	1
20	Fan side ball bearing	-	1
21	Adjusting ring	Steel C70	1
22	Tie rod	Fe 420 Zincate	4
23	Capacitor [1]	-	1
24	Priming plug	AISI 303	1
25	Drain plug	AISI 303	1
26	O-ring [4]	NBR/FPM/EPDM	1
30	Mechanical seal protection	AISI 304	1
32	Key	AISI 316	1
34	Impeller nut	AISI 304	1
42	Motor support	Aluminium	1
50	Spacer	-	1
52	Terminal box [1]	PP	1
56	Box gasket	NBR	1
75	Washer	AISI 304	1
76	Washer	AISI 304	1
77	O-ring [4]	NBR/FPM/EPDM	1
78	O-ring [4]	NBR/FPM/EPDM	1
90	Terminal box cover gasket [1]	NBR	1
92	Lip seal	-	1
93	Lip seal	-	1
110	Protector [1]	-	1
200	Screw	Stainless steel A2 UNI7323	6

[1] Only for Single phase
[2] Only for Three phase
[3] See **CONSTRUCTION 3**
[4] FPM for H-HS-HW-HSW-Q1AVGG
EPDM for AQ1EGG-VAEGG-Q1U3EGG-U3BEGG
NBR only for Standard version

(3/3)
Construction

Pump name DWO 300

Customer	Date 19-May-2020	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

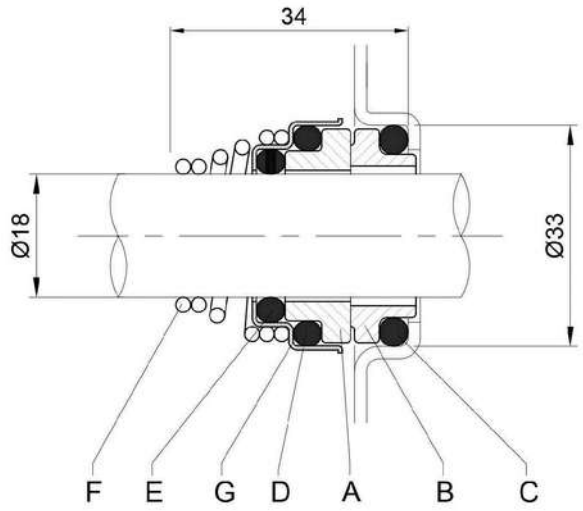

REF	PART NAME	MATERIAL Standard
A	Rotary seal ring	Ceramic
B	Stationary seal ring	Carbon graphite
C	O-ring	NBR
D	O-ring	NBR
E	O-ring	NBR
F	Self driving spring	AISI 316
G	Frame	AISI 304