FUSERBLOC



20 to 1250 A
Manual operation

➲ Function

FUSERBLOC are manually operated multipolar fuse combination switches. They break or switch off on load and provide safety isolation and protection against overcurrent for any low voltage electrical circuit.

➲ General characteristics

- Fully visualised breaking.
- Double break by phase (top and bottom of fuse).
- Protection against overcurrent by fuse circuit-breakers (gG, aM, UR, BS88) with high breaking capacity (100 kA eff.).
- IP20 protection with terminal shrouds front panel.
- Compact.
- TEST position for testing control circuits without power using U type auxiliary contacts. In TEST position, the enclosure door can be opened.

➲ Available on request

- **FUSERBLOC** with **rear top or bottom connections:** consult us.
- **Multipolar FUSERBLOC** providing various coupling possibilities (for example: FUSERBLOC 3 x 400 A + 3 x 50 A with front or side operation).
- **FUSERBLOC UL and CSA** for the North American markets (see page 204).
- **FUSERBLOC with centred operation:** consult us.
- **FUSERBLOC for solar applications**: consult us.

➲ Conformity to standards

- IEC 60947-3
- EN 60947-3
- BS EN 60947-3
- NBN EN 60947-3
- IEC 60269-1
- DIN EN 60269-1
- NF EN 60269-1
- IEC 60269-2
- VDE 0636-1
- VDE 0660-107
- IS 14947-3
- Standards UL: see FUSERBLOC UL


➲ Approvals and certifications(1)

- KEMA
- LOVAG
- CCC
- GOST (Russia)
- CEBEC (Belgium)
- FI (Finland)
- CCA
- UKR (Ukraine)

(1) Product reference on request.



Multipolar FUSERBLOC



Centred operation




FUSERBLOC for solar applications

What you need to know


- Along with the rating, FUSERBLOC is selected according to the fuse type and functional specifications. SOCOMEC FUSERBLOC can be equipped with NFC, DIN or BS88 fuses.

- The INSTALFUSE® v2 software carries out sizing calculations for low-voltage electrical installations and their fuse protection.


- Whether it is 3 pole + switched neutral or 3 pole + solid neutral, the FUSERBLOC 20 to 32 A with direct front operation and external operation is the best suited solution in compact design.

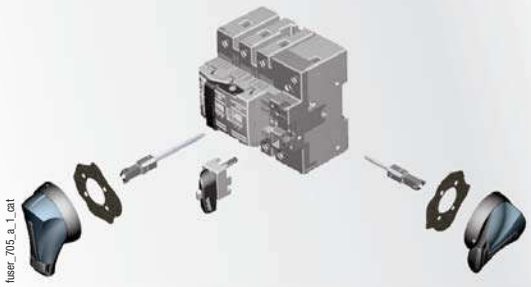

- From 630 to 1250 A, the FUSERBLOC unit allows direct and external front or right side operation in 2, 3 or 4 poles.

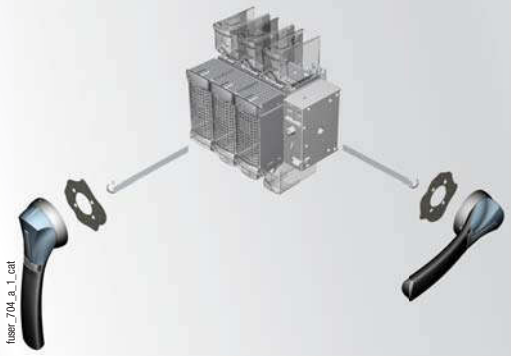


- From 32 to 400 A, the FUSERBLOC is available in 2, 3 or 4 poles with direct side operation.




- FUSERBLOC is available in 3 and 4-pole versions within 2 types of enclosures:
  - Steel enclosure for front operation from 25 to 800 A, (NFC and DIN)
  - Polyester enclosure with front and side operation from 50 to 400 A (NFC and DIN).
  - For BS88 steel enclosed FUSERBLOC please consult us.



- With external operation, it is possible to operate the device in 3 ways:
  - Front operation.
  - Right side operation.
  - Left side operation.

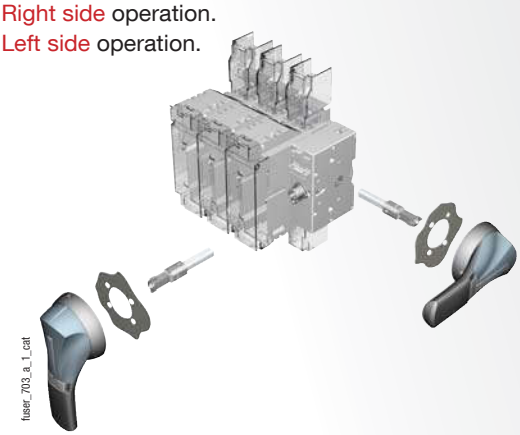

- For ratings 20 to 400 A, the flat mounting kit provides a compact solution ideally suited to withdrawable applications.

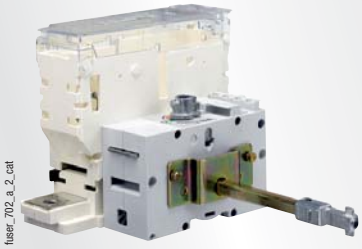



fuser_570_a_2_cat

BS 88 - External front and side operation 20 to 160 A

Rating (A) Fuse size Frame size	Number of poles	Reference Switch I-0	Reference Changeover Switch I-0-II	External front handle I-0	TEST External front handle I-0 TEST	External right side handle I-0	Changeover external front handle I-0-II	Shaft extensions for handle	Terminal shrouds[3]	Additional contact holder for U type AC	Integrated solid neutral link
20 A A1 0	3 P	3641 **3000**	3680 **3000**	Black S1 type IP55 1411 **2111**[1] Red/Yellow S1 type IP65 1414 **2111**	Black S1 type IP65 1413 **2115**[1] Red/Yellow S1 type IP65 1414 **2115**	Black S1 type IP55 1415 **2111**[1] Red/Yellow S1 type type IP65 1418 **2111**	Black S1 type IP55 1411 **2113**[1] Red/Yellow S1 type IP65 1414 **2113**	320 mm 1401 **0532**		3999 **0710**[2]	
	3 P + switched neutral	3641 **4000**	3680 **4000**								
	3 P+solid neutral	3641 **5000**									
CD 32 A A1 0	3 P	3641 **3001**	3680 **3001**								
	3 P + switched neutral	3641 **4001**	3680 **4001**								
	3 P + solid neutral	3641 **5001**									
32 A A1 11	2 P	3841 **2003**						320 mm 1400 **1032**	Standard	3999 **0600**[2]	
	3 P	3841 **3003**	3880 **3003**								
	4 P	3841 **6003**	3880 **6003**								
63 A A2-A3 12	2 P	3841 **2006**									
	3 P	3841 **3006**	3880 **3006**								
	4 P	3841 **6006**	3880 **6006**								
100 A A4[4] **13**	2 P	3841 **2010**		Black S2 type IP55 1421 **2111**[1] Red/Yellow S2 type IP65 1424 **2111**	Black S2 type IP65 1423 **2115**[1] Red/Yellow S2 type IP65 1424 **2115**	Black S2 type IP55 1425 **2111**[1] Red/Yellow S2 type IP65 1428 **2111**	Black S2 type IP55 1421 **2113**[1] Red/Yellow IP65 1424 **2113**		2 P 3998 **2016** 3 P 3998 **3016** 4 P 3998 **4016**		3829 **9310**
	3 P	3841 **3010**	3880 **3010**								
	4 P	3841 **6010**	3880 **6010**								
CD 160 A A3-A4[4] **13 A**	2 P	3841 **2014**									3829 **9320**
	3 P	3841 **3014**	3880 **3014**								
	4 P	3841 **6014**	3880 **6014**								
160 A A4 14	2 P	3841 **2015**									
	3 P	3841 **3015**	3880 **3015**								
	4 P	3841 **6015**	3880 **6015**								
160 A B1-B2 14	2 P	3841 **2016**									
	3 P	3841 **3016**	3880 **3016**								
	4 P	3841 **6016**	3880 **6016**								

(1) Standard.
(2) 4 auxiliary contacts as standard without support (the support is for 4 additional auxiliary contacts.
(3) Top/bottom.
(4) For fuse size A4: max diameter 31 mm.



fuser_554_a_2_cat

BS 88 - External front and side operation 200 to 1250 A

Rating (A) Fuse size Frame size	Number of poles	Reference Switch I-0	Reference Changeover Switch I-0-II	External front handle I-0	TEST External front handle I-0 TEST	External right side handle I-0	Changeover external front handle I-0-II	Shaft extensions for handle	Terminal shrouds[3]	Additional contact holder for U type AC	Integrated solid neutral link
CD 200 A A3-A4[5] 13 A	2 P	3841 **2019**		Black S2 type IP55 1421 **2111**[1] Red/Yellow S2 type IP65 1424 **2111**	Black S2 type IP65 1423 **2115**[1] Red/Yellow S2 type IP65 1424 **2115**	Black S2 type IP55 1425 **2111**[1] Red/Yellow S2 type IP65 1428 **2111**	Black S2 type IP55 1421 **2113**[1] Red/Yellow S2 type IP65 1424 **2113**	320 mm 1400 **1032**	2 P 3998 **2016** 3 P 3998 **3016** 4 P 3998 **4016**	3999 **0600**[4]	3829 **9320**
	3 P	3841 **3019**	3880 **3019**								
	4 P	3841 **6019**	3880 **6019**								
200 A B1-B2 15	2 P	3841 **2021**							2 P 3998 **2025** 3 P 3998 **3025** 4 P 3998 **4025**		3829 **9325**
	3 P	3841 **3021**	3880 **3021**								
	4 P	3841 **6021**	3880 **6021**								
250 A B1-B2-B3 15	2 P	3841 **2024**									
	3 P	3841 **3024**	3880 **3024**								
	4 P	3841 **6024**	3880 **6024**								
315 A B1-B2-B3 16	2 P	3841 **2032**									3829 **9339**
	3 P	3841 **3032**	3880 **3032**								
	4 P	3841 **6032**	3880 **6032**								
400 A B1-B2-B3-B4 16	2 P	3841 **2039**									
	3 P	3841 **3039**	3880 **3039**								
	4 P	3841 **6039**	3880 **6039**								
630 A C1-C2 17	2 P	3821 **2063**		Black S3 type IP65 1433 **3111**[1] Red/Yellow S3 type IP65 1434 **3111**		Black S3 type IP65 1437 **3111**[1] Red/Yellow S3 type IP65 1438 **3111**		320 mm 1400 **1232**	2 P 3898 **2080** 3 P 3898 **3080** 4 P 3898 **4080**		3829 **9308**
	3 P	3821 **3063**									
	4 P	3821 **6063**									
800 A C1-C2-C3 17	2 P	3821 **2080**									
	3 P	3821 **3080**									
	4 P	3821 **6080**									
1250 A D1 18	2 P	3821 **2120**		Black S4 type IP65 1443 **3111**[1]					3898 **2120**		3829 **9312**
	3 P	3821 **3120**							3898 **3120**		
	4 P	3821 **6120**							3898 **4120**		

(1) Standard.
(2) 4 auxiliary contacts as standard without support (the support is for 4 additional auxiliary contacts.
(3) Top/bottom.
(4) 8 AC as standard without support (the support is for 8 additional auxiliary contacts.
(5) For fuse size A4: max diameter 31mm



fuser_539_a_1_cat

BS 88 - Direct operation
20 to 160 A

Rating (A) Fuse size Frame size	Number of poles	Reference Side direct operation	Reference Direct front operation	Side direct handle operation switch	Direct front handle	Auxiliary contacts	Terminal shrouds[3]	Cage terminals	Handle key interlocking accessories[2]
20 A **A1** **0**	3 P		3641 **3000**		Black 3629 **4012**	1 contact NO/NC A type 3999 **0001**[1] 2 contacts NO/NC A type 3999 **0002**[1]	Standard	Standard	
	3 P + switched neutral		3641 **4000**						
	3 P + solid neutral		3641 **5000**						
CD 32 A **A1** **0**	3 P		3641 **3001**						
	3 P + switched neutral		3641 **4001**						
	3 P + solid neutral		3641 **5001**						
32 A **A1** **1**	2 P	3625 **2003**	consult us	Black 3629 **7900**		1 contact NO/NC A type 3999 **0021**[1] 2 contacts NO/NC A type 3999 **0022**[1]			3629 **7903**
	3 P	3625 **3003**	consult us						
	4 P	3625 **6003**	consult us						
63 A **A2-A3** **2**	2 P	3625 **2006**	consult us						
	3 P	3625 **3006**	consult us						
	4 P	3625 **6006**	consult us						
100 A **A4**[4] **3**	2 P	3625 **2010**	consult us	Black 3629 **7901**			2 P 3998 **2016** 3 P 3998 **3016** 4 P 3998 **4016**	3 P 5400 **3016** 4 P 5400 **4016**	3629 **7913**
	3 P	3625 **3010**	consult us						
	4 P	3625 **6010**	consult us						
CD 160 A **A3-A4**[4] **3 A**	2 P	3625 **2014**	consult us						
	3 P	3625 **3014**	consult us						
	4 P	3625 **6014**	consult us						
160 A **A4** **4**	2 P	3625 **2015**	consult us						
	3 P	3625 **3015**	consult us						
	4 P	3625 **6015**	consult us						
160 A **B1-B2** **4**	2 P	3625 **2016**	consult us						
	3 P	3625 **3016**	consult us						
	4 P	3625 **6016**	consult us						

(1) Max. 2 contacts.
(2) Lock not included.
(3) Top/bottom.
(4) For fuse size A4: max diameter 31 mm.


fuser_230_a_1_cat

BS 88 - Direct operation 200 to 400 A

Rating (A) Fuse size Frame size	Number of poles	Reference Side direct operation	Reference Direct front operation	Side direct handle operation switch	Direct front handle	Auxiliary contacts	Terminal shrouds[3]	Cage terminals	Handle key interlocking accessories[2]
CD 200 A A3-A4[4] **13 a**	2 P	3625 **2019**	consult us	Black 3629 **7901**	Consult us	1 contact NO/NC A type 3999 **0021**[1] 2 contacts NO/NC A type 3999 **0022**[1]	2 P 3998 **2016** 3 P 3998 **3016** 4 P 3998 **4016**	3 P 5400 **3016** 4 P 5400 **4016**	3629 **7913**
	3 P	3625 **3019**	consult us						
	4 P	3625 **6019**	consult us						
200 A B1-B2 5	2 P	3625 **2021**	consult us						
	3 P	3625 **3021**	consult us						
	4 P	3625 **6021**	consult us						
250 A B1-B2-B3 5	2 P	3625 **2024**	consult us				2 P 3998 **2025** 3 P 3998 **3025** 4 P 3998 **4025**	3 P 5400 **3025** 4 P 5400 **4025**	
	3 P	3625 **3024**	consult us						
	4 P	3625 **6024**	consult us						
315 A B1-B2-B3 6	2 P	3625 **2032**	consult us					3 P 5400 **3040** 4 P 5400 **4040**	
	3 P	3625 **3032**	consult us						
	4 P	3625 **6032**	consult us						
400 A B1-B2-B3-B4 6	2 P	3625 **2039**	consult us						
	3 P	3625 **3039**	consult us						
	4 P	3625 **6039**	consult us						

(1) Max. 2 contacts.
(2) Lock not included.
(3) Top/bottom.
(4) For fuse size A4: max diameter 31 mm.


fuser_416_a_1_cat

BS 88 - Direct operation 630 to 1250 A

Rating (A) Fuse size Frame size	Number of poles	Reference Side direct operation	Reference Direct front operation	Side direct handle operation switch	Direct front handle	Auxiliary contacts	Terminal shrouds[3]	Cage terminals	Handle key interlocking accessories[2]
630 A C1-C2 17	2 P	3821 **2063**	3821 **2063**	Black 3899 **7911**	Black 3899 **6011**	1 contact NO U type 3999 **0701**[1] 1 contact NO U type 3999 **0702**[1]	2 P 3898 **2080** 3 P 3898 **3080** 4 P 3898 **4080**		
	3 P	3821 **3063**	3821 **3063**						
	4 P	3821 **6063**	3821 **6063**						
800 A C1-C2-C3 17	2 P	3821 **2080**	3821 **2080**						
	3 P	3821 **3080**	3821 **3080**						
	4 P	3821 **6080**	3821 **6080**						
1250 A D1 18	2 P	3821 **2120**	3821 **2120**		Black 3899 **7011**		3898 **2120**		
	3 P	3821 **3120**	3821 **3120**				3898 **3120**		
	4 P	3821 **6120**	3821 **6120**				3898 **4120**		

(1) Max.number of U type auxiliary contact is 8.
(2) Lock not included.
(3) Top/bottom.



fuser_566_a_2_cat

NFC and DIN
External front and right side operation
25 to 125 A

Rating (A) / Fuse / Frame size	No. of poles	Switch I-0-TEST	Changeover switch I-0-II	External front handle	TEST external front handle	External right side handle	Changeover external front handle	Shaft for external handle	Auxiliary contacts[2]	Terminal shrouds[1]	Integrated solid neutral link
25 A 10 x 38 0	3 P	3631 **3002**[1]	3670 **3002**	S1 type Black IP55 1411 **2111** Red/Yellow IP65 1414 **2111**	S1 type Black IP65 1413 **2115** Red/Yellow IP65 1414 **2115**	S1 type Black IP55 1415 **2111** Red/Yellow IP65 1418 **2111**	S1 type Black IP55 1415 **2113** Red/Yellow IP65 1418 **2113**	320 mm 1401 **0532**	U type 1 contact 3999 **0710**		
	3 P + switch neutral	3631 **4002**[1]	3670 **4002**								
	3 P + solid neutral	3631 **5002**[1]									
CD 32 A 10 x 38 0	3 P	3631 **3003**	3670 **3003**								
	3 P + switch neutral	3631 **4003**	3670 **4003**								
	3 P + solid neutral	3631 **5003**									
32 A 14 x 51 0	3 P	3631 **3004**[1]	3670 **3004**								
	3 P + switch neutral	3631 **4004**[1]	3670 **4004**								
	3 P + solid neutral	3631 **5004**[1]									
50 A 14 x 51 11	2 P	3831 **2005**		S1 type Black IP65 1411 **2111** Red/Yellow IP65 1414 **2111**	S1 type Black IP65 1413 **2115** Red/Yellow IP65 1414 **2115**			320 mm 1400 **1032**[2]	U type 1 contact 3999 **0600**	Standard	3829 **9310**
	3 P	3831 **3005**[1]	3870 **3005**								
	4 P	3831 **6005**[1]	3870 **6005**								
63 A 00C 12	2 P	3831 **2006**									
	3 P	3831 **3006**[1]	3870 **3006**								
	4 P	3831 **6006**[1]	3870 **6006**								
100 A 22 x 58 13	2 P	3831 **2010**		S2 type Black IP65 1421 **2111** Red/Yellow IP65 1424 **2111**	S2 type Black IP55 1423 **2115** Red/Yellow IP65 1424 **2115**	S2 type Black IP55 1425 **2111** Red/Yellow IP65 1428 **2111**	S2 type Black IP55 1421 **2113** Red/Yellow IP65 1424 **2113**			2 P 3998 **2016** 3 P 3998 **3016** 4 P 3998 **4016**	
	3 P	3831 **3010**[1]	3870 **3010**								
	4 P	3831 **6010**[1]	3870 **6010**								
125 A 22 x 58 13	2 P	3831 **2011**									
	3 P	3831 **3011**	3870 **3010**								
	4 P	3831 **6011**	3870 **6010**								
125 A 00 13	2 P	3831 **2012**									
	3 P	3831 **3012**	3870 **3011**								
	4 P	3831 **6012**	3870 **6011**								

(1) Available enclosed (see page 494 "Enclosed fuse switches").
(2) Top/bottom.
(3) Maximum 4 contacts.



fuser_549_a_1_cat

NFC and DIN
External front and right side operation
160 to 1250 A

Rating (A) / Fuse / Frame size	No. of poles	Switch I-0	Changeover switch I-0-II	External front handle	TEST external front handle	External right side handle	Changeover external front handle	Shaft for external handle	Auxiliary contacts	Terminal shrouds[2]	Integrated solid neutral link
160 A 00 13	2 P	3831 **2015**		Type S2 Black IP55 1421 **2111** Red/Yellow IP65 1424 **2111**	Type S2 Black IP65 1423 **2115** Red/Yellow IP65 1424 **2115**	Type S2 Black IP55 1425 **2111** Red/Yellow IP65 1428 **2111**	Type S2 Black IP55 1425 **2113** Red/Yellow IP65 1428 **2113**	320 mm 1400 **1032**	U type 1 contact 3999 **0600**[3]	2 P 3998 **2016** 3 P 3998 **3016** 4 P 3998 **4016**	3829 **9320**
	3 P	3831 **3015**	3870 **3015**								
	4 P	3831 **6015**	3870 **6015**								
160 A 0 14	2 P	3831 **2016**									
	3 P	3831 **3016**[1]	3870 **3016**								
	4 P	3831 **6016**[1]	3870 **6016**								
250 A 1 15	2 P	3831 **2024**							U type 1 contact 3999 **0600**[4]	2 P 3998 **2025** 3 P 3998 **3025** 4 P 3998 **4025**	3829 **9325**
	3 P	3831 **3024**[1]	3870 **3024**								
	4 P	3831 **6024**[1]	3870 **6024**								
400 A 2 16	2 P	3831 **2039**									3829 **9339**
	3 P	3831 **3039**[1]	3870 **3039**								
	4 P	3831 **6039**[1]	3870 **6039**								
630 A 3 17	2 P	3811 **2063**		Type S3 Black IP65 1433 **3111** Red/Yellow IP65 1434 **3111**		Type S3 Black IP65 1437 **3111** Red/Yellow IP65 1438 **3111**		320 mm 1400 **1232**		2 P 3898 **2080** 3 P 3898 **3080** 4 P 3898 **4080**	3829 **9308**
	3 P	3811 **3063**[1]									
	4 P	3811 **6063**[1]									
800 A 3 17	2 P	3811 **2080**									
	3 P	3811 **3080**									
	4 P	3811 **6080**									
800 A 4 18	2 P	3811 **2081**		Type S4 Black IP65 1443 **3111** Red/Yellow IP65 1444 **3111**						2 P 3898 **2120** 3 P 3898 **3120** 4 P 3898 **4120**	3829 **9312**
	3 P	3811 **3081**									
	4 P	3811 **6081**									
1250 A 4 18	2 P	3811 **2120**									
	3 P	3811 **3120**									
	4 P	3811 **6120**									

(1) Available enclosed (see page 494 "Enclosed fuse switches").
(2) Top/bottom.
(3) Maximum 4 contacts.
(4) Maximum 8 contacts.




fuser_539_a_1_cat

NFC and DIN - Direct operation
25 to 125 A

Rating (A) Fuse size Frame size	No. of poles	Direct side operation	Direct front operation	Direct handle	Auxiliary contacts	Terminal shrouds	Cage terminals	Lock for fuse protection cover	Handle ley interlocking accessories[6]
25 A 10 x 38 0	3 P		3631 **3002**	Black 3629 **4012**[1][2]	A type 1 contact NO/NC 3999 **0001**[3] A type 2 contacts NO/NC 3999 **0002**[3]	Standard	Standard	Standard	
	3 P + switch neutral		3631 **4002**						
	3 P + solid neutral		3631 **5002**						
CD 32 A 10 x 38 0	3 P		3631 **3003**						
	3 P + switch neutral		3631 **4003**						
	3 P + solid neutral		3631 **5003**						
32 A 14 x 51 0	3 P		3631 **3004**						
	3 P + switch neutral		3631 **4004**						
	3 P + solid neutral		3631 **5004**						
50 A 14 x 51 1	2 P	3615 **2005**	Consult us	Black 3629 **7900**[5][2]	A type 1 contact NO/NC 3999 **0021**[3] A type 2 contacts NO/NC 3999 **0022**[3]				3629 **7903**
	3 P	3615 **3005**	Consult us						
	4 P	3615 **6005**	Consult us						
63 A 00C 2	2 P	3615 **2006**	Consult us					3999 **8906**	
	3 P	3615 **3006**	Consult us						
	4 P	3615 **6006**	Consult us						
100 A 22 x 58 3	2 P	3615 **2010**	Consult us	Black 3629 **7901**[5][2]		2 P 3998 **2016**[4] 3 P 3998 **3016**[4] 4 P 3998 **4016**[4]	3 P 5400 **3016** 4 P 5400 **4016**	3999 **8912**	3629 **7913**
	3 P	3615 **3010**	Consult us						
	4 P	3615 **6010**	Consult us						
125 A 22 x 58 3	2 P	3615 **2011**	Consult us						
	3 P	3615 **3011**	Consult us						
	4 P	3615 **6011**	Consult us						
125 A 00 3	2 P	3615 **2012**	Consult us						
	3 P	3615 **3012**	Consult us						
	4 P	3615 **6012**	Consult us						

(1) Direct front operation.
(2) Standard.
(3) Maximum 2 contacts.
(4) Top or bottom.
(5) Direct right side operation.
(6) Loccking using RONIS EL11AP lock (lock not included).


fuser_230_a_1_cat

NFC and DIN - Direct operation 160 to 400 A

Rating (A) Fuse size Frame size	No. of poles	Direct side operation	Direct front operation	Direct handle	Auxiliary contacts	Terminal shrouds	Cage terminals	Lock for fuse protection cover	Handle ley interlocking accessories[5]
160 A 00 3	2 P	3615 **2015**	Consult us	Black 3629 **7901**[4][1]	A type 1 contact NO/NC 3999 **0021**[2]	2 P 3998 **2016**[3]	3 P 5400 **3016**	3999 **8912**	3629 **7913**
	3 P	3615 **3015**	Consult us			3 P 3998 **3016**[3]	4 P 5400 **4016**		
	4 P	3615 **6015**	Consult us			4 P 3998 **4016**[3]			
160 A 0 4	2 P	3615 **2016**	Consult us	Black 3629 **7901**[4][1]				3999 **8216**	
	3 P	3615 **3016**	Consult us					3999 **8316**	
	4 P	3615 **6016**	Consult us					3999 **8416**	
250 A 1 5	2 P	3615 **2024**	Consult us		A type 2 contacts NO/NC 3999 **0022**[2]	2 P 3998 **2025**[3]	3 P 5400 **3025** 4 P 5400 **4025**	3999 **8225**	
	3 P	3615 **3024**	Consult us			3 P 3998 **3025**[3]		3999 **8325**	
	4 P	3615 **6024**	Consult us			4 P 3998 **4025**[3]		3999 **8425**	
400 A 2 6	2 P	3615 **2039**	Consult us				3 P 5400 **3040** 4 P 5400 **4040**	3999 **8240**	
	3 P	3615 **3039**	Consult us					3999 **8340**	
	4 P	3615 **6039**	Consult us					3999 **8440**	

(1) Standard.
(2) Maximum 2 contacts.
(3) Top/bottom.
(4) Direct right side operation.
(5) Locking using RONIS EL11AP lock (lock not included).


fuser_416_a_1_cat

NFC and DIN - Direct operation 630 to 1250 A

Rating (A) Fuse size Frame size	No. of poles	Direct side and front operation	Direct front handle	Direct side handle	Auxiliary contacts	Terminal shrouds
630 A 3 17	2 P	3811 **2063**	Black 3899 **6011**[1][2]	Black 3899 **7911**	U type 1 contact NC 3999 **0701**[4] 1 contact NO 3999 **0702**[4]	2 P 3898 **2080**[3] 3 P 3898 **3080**[3] 4 P 3898 **4080**[3]
	3 P	3811 **3063**				
	4 P	3811 **6063**				
800 A 3 17	2 P	3811 **2080**				
	3 P	3811 **3080**				
	4 P	3811 **6080**				
800 A 4 18	2 P	3811 **2081**	Black 3899 **7011**[1][2]			2 P 3898 **2120**[3] 3 P 3898 **3120**[3] 4 P 3898 **4120**[3]
	3 P	3811 **3081**				
	4 P	3811 **6081**				
1250 A 4 18	2 P	3811 **2120**				
	3 P	3811 **3120**				
	4 P	3811 **6120**				

(1) Direct front operation.
(2) Standard.
(3) Top/bottom.
(4) Maximum 8 contacts.

Direct handle



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

For front operation

Rating (A)	Frame size	Figure no.	Handle colour	Reference
20 ... 32	0	1	Black	3629 **4012**
20 ... 32	0	1	Red	3629 **4013**
32 ... 400	11 ... 16	2	Black	3629 **7910**
630 ... 800	17	2	Black	3899 **6011**
800 ... 1250	18	3	Black	3899 **7011**

For right side operation

Rating (A)	Frame size	Figure no.	Handle colour	Reference
32 ... 63	1/2	4	Black	3629 **7900**
100 ... 400	3 … 6	4	Black	3629 **7901**
630 ... 1250	17 ... 18	5	Black	1437 **7911**

External front operation handle



S1 type handle



S2 type handle



S3 type handle



S4 type handle

Padlockable handle in position 0

Rating (A)	Frame size	Handle type	Handle colour	Operation	External IP(1)	Defeatable handle	Reference
CD 25 … 63	0/11/12	S1	Black	I - 0	IP55	Yes	1411 **2111**
CD 25 … 63	0/11/12	S1	Black	I - 0	IP65	Yes	1413 **2111**
CD 25 … 63	0/11/12	S1	Red/Yellow	I - 0	IP65	Yes	1414 **2111**
CD 25 … 63	0/11/12	S1	Black	I - 0 - Test	IP65	Yes	1413 **2115**
CD 25 … 63	0/11/12	S1	Red/Yellow	I - 0 - Test	IP65	Yes	1414 **2115**
100 … 400	13 … 16	S2	Black	I - 0	IP55	Yes	1421 **2111**
100 … 400	13 … 16	S2	Black	I - 0	IP65	Yes	1423 **2111**
100 … 400	13 … 16	S2	Red/Yellow	I - 0	IP65	Yes	1424 **2111**
100 … 400	13 … 16	S2	Black	I - 0 - Test	IP55	Yes	1423 **2115**
100 … 400	13 … 16	S2	Red/Yellow	I - 0 - Test	IP65	Yes	1424 **2115**
630 … 800	17	S3	Black	I - 0	IP65	Yes	1433 **3111**
630 … 800	17	S3	Red/Yellow	I - 0	IP65	Yes	1434 **3111**
800 … 1250	18	S4	Black	I - 0	IP65	Yes	1443 **3111**
800 … 1250	18	S4	Red/Yellow	I - 0	IP65	Yes	1444 **3111**

(1) IP: Degree of protection according to standard IEC 60529.

Padlockable handle in position 0 and I

Rating (A)	Frame size	Handle type	Handle colour	External IP(1)	Reference
CD 25 … 63	0/11/12	S1	Black	IP65	1413 **2311**
100 … 400	13 … 16	S2	Black	IP65	1423 **2311**

(1) IP: Degree of protection according to standard IEC 60529.

External right side operation handle



S1 type handle



S3 type handle

Rating (A)	Frame size	Handle type	Handle colour	External IP(1)	Reference
CD 25 … 63	0/11/12	S1	Black	IP55	1415 **2111**
CD 25 … 63	0/11/12	S1	Black	IP65	1417 **2111**
CD 25 … 63	0/11/12	S1	Red/Yellow	IP65	1418 **2111**
100 … 400	13 … 16	S2	Black	IP55	1425 **2111**
100 … 400	13 … 16	S2	Black	IP65	1427 **2111**
100 … 400	13 … 16	S2	Red/Yellow	IP65	1428 **2111**
630 … 1250	17/18	S3	Black	IP65	1437 **3111**
630 … 1250	17/18	S3	Red/Yellow	IP65	1438 **3111**

(1) IP: Degree of protection according to standard IEC 60529.

External front handle with metal tab


acces_236_a_1_cat

S2 type handle


acces_235_a

S3 type handle

Rating (A)	Frame size	Handle type	Handle colour	External IP (1)	Defeatable handle	Reference
CD 25 … 63	0/11/12	S1	Black	IP65	Yes	141D **2911**
CD 25 … 63	0/11/12	S1	Red/Yellow	IP65	Yes	141E **2911**
100 … 400	13 … 16	S2	Black	IP65	Yes	142D **2911**
100 … 400	13 … 16	S2	Red/Yellow	IP65	Yes	142E **2911**
600…800	17	S3	Black	IP65	Yes	143D **3911**
600…800	17	S3	Red/Yellow	IP65	Yes	143E **3911**
800 … 1250	18	S4	Black	IP65	Yes	144D **3911**
800 … 1250	18	S4	Red/Yellow	IP65	Yes	144E **3911**

(1) IP: Degree of protection according to standard IEC 60529.

S type handle adapter


acces_187_a_1_cat


Use
Enables S type handles to be fitted in place of existing older style SOCOMEC handles. Adapter can also be utilised as a spacer to increase the distance between the panel door and the handle lever.

Dimensions
Adds 12 mm to the depth.

Handle colour	To be ordered in multiples of	External IP(1)	Reference
Black	10	IP65	1493 **0000**

(1) IP: Degree of protection according to standard IEC 60529.


Alternative S-type handle cover colours


acces_198_a_1_cat

Use
For single lever handles type S1, S2, S3 and double arms lever handle, type S4.
Other colours: consult us.

Handle colour	To be ordered in multiples of	Handle	Reference
Light grey	50	Type S1, S2, S3	1401 **0001**
Dark grey	50	Type S1, S2, S3	1401 **0011**
Light grey	50	S4 type	1401 **0031**
Dark grey	50	S4 type	1401 **0041**

Flat mounting kit


fuser_538_a_1_cat

Use
The flat mounting kit provides a compact solution ideally suited to withdrawable applications.

Rating (A)	Frame size	Type	Reference
CD 20 … CD 32	0	Kit + Shaft 200 mm	1429 **7709**
32 … 400	11 … 16	Kit + Shaft 200 mm	1429 **7710**

Handle for flat mounting kit


fuser_536_a_1_cat

S2 type handle.

Padlockable handle in position 0

Rating (A)	Frame size	Handle type	Handle colour	External IP(1)	Reference
CD 20 … 63	0/11/12	S1	Black	IP55	1411 **2111**(2)
CD 20 … 63	0/11/12	S1	Red/Yellow	IP65	1414 **2111**(2)
100 … 400	13 … 16	S2	Black	IP55	1421 **2111**(2)
100 … 400	13 … 16	S2	Red/Yellow	IP65	1424 **2111**(2)

(1) IP: Degree of protection according to standard IEC 60529.
(2) Defeatable handle in position I.

Front operation shaft support accessory



Use

This support maintains shaft position for extension shafts greater than 320 mm in length.

Rating (A)	Frame size	Reference
32 … 400	11 … 16	3899 **0400**

Shaft guide for external operation




Use

To guide the shaft extension into the external handle.
This accessory enables handle to engage extension shaft with a misalignment of up to 15 mm.
Required for a shaft length over 320 mm.

Description	Reference
Shaft guide	1429 **0000**

Shaft for external front





Use

Standard lengths:
- 200 mm
- 320 mm
- 400 mm
- 500 mm.

Other lengths: consult us.

Rating (A)	Frame size	Shaft length (mm)	Reference
CD 20 …CD 32	0	200	1401 **0520**
CD 20 …CD 32	0	320	1401 **0532**
CD 20 …CD 32	0	400	1401 **0540**(1)
32 … 400	11 … 16	200	1400 **1020**
32 … 400	11 … 16	320	1400 **1032**
32 … 400	11 … 16	500	1400 **1050**(2)
630 … 800	17	200	1400 **1220**
630 … 1250	17/18	320	1400 **1232**
630 … 1250	17/18	500	1400 **1250**(1)

(1) Use the accessory "guide cone for external control".
(2) Use the accessory "shaft extension support for external front control".


Dimension X (mm) for FUSERBLOC BS88

Shaft extension length (mm)	Rating (A) Fuse size Frame size	CD 20 … CD 32 A1 0	32 A1 11	63 … 160 A2-A3/A4 12/13/14	CD160 … CD200 A3-A4 13 A	160 … 200 B1-B2 14/15	250 … 315 B1-B2-B3 15/16	630 … 800 C1-C2-C3 17	1250 D1 18
200		102 … 245	100 … 230	125 … 230	150 … 230	135 … 230	160 … 230	270 … 304	
320		102 … 365	100 … 350	125 … 350	150 … 350	135 … 350	160 … 350	270 … 424	304 … 424
400		102 … 445							
500			100 … 530	125 … 530	150 … 530	135 … 530	160 … 530	270 … 600	304 … 600

Dimension X (mm) for FUSERBLOC NFC and DIN

Shaft extension length (mm)	Rating (A) Fuse size Frame size	CD 25 … CD 32 10x38/14x51 0	50 14x51 11	63 00C 12	100 … 160 22x58/00 13	160 0 14	250 … 400 1/2 15/16	630 … 800 3 17	800 … 1250 4 18
200		102 … 245	100 … 230	125 … 230	135 … 230	145 … 230	160 … 230	270 … 304	
320		102 … 365	100 … 350	125 … 350	135 … 350	145 … 350	160 … 350	270 … 424	304 ... 424
400		102 … 445	100 ... 430	125 ... 430	135 ... 430	145 ... 430	160 ... 430	270 ... 504	304 ... 504
500			100 … 530	125 … 530	135 … 530	145 … 530	160 … 530	270 … 604	304 ... 604

Shaft for external side



Use

Standard lengths, 200 mm.

Rating (A)	Frame size	Handle type	Dimension Y (mm)	Shaft length (mm)	Reference
CD 20 … CD 32	0	S	36 … 159	200	1401 **0520**
32 … 400	11 … 16	S	36 … 172	200	1400 **1020**
630 … 1250	17/18	S	15 … 150	200	1400 **1220**

Integrated solid neutral link



Use
Fixing the solid neutral onto the mechanism produces a device with a solid neutral of the same size as a standard three-pole device (+ 6 mm).

BS88 for external front operation

Rating (A)	Switch body size	Bar rating (A)	Reference
100	13	125	3829 **9310**
CD 160 … CD 200	13a	200	3829 **9320**
160	14	200	3829 **9320**
200 … 250	15	250	3829 **9325**
315 … 400	16	400	3829 **9339**
630 … 800	17	800	3829 **9308**
1250	18	1250	3829 **9312**

NFC and DIN for external front operation

Rating (A)	Switch body size	Bar rating (A)	Reference
100 … 125	13	125	3829 **9310**
160	13	160	3829 **9320**
160	14	200	3829 **9320**
250	15	250	3829 **9325**
400	16	400	3829 **9339**
630 … 800	17	800	3829 **9308**
800 …1250	18	1250	3829 **9312**

Solid neutral module




BS88 for external front operation

Rating (A)	Switch body size	I_{max} (A)	Distance (mm)	Reference
32	11	32	27	3629 **9227**
63	12	63	32	3629 **9232**
100	13	100	36	3629 **9236**
CD 160 … CD 200	13 a	200	36	3629 **9237**
160	14	160	50	3629 **9250**
200 … 250	15	250	60	3629 **9260**
315 … 400	16	400	66	3629 **9266**
630 … 800	17	800	94	3629 **9294**
1250	18	1250	120	3629 **9212**

NFC and DIN for external front operation

Rating (A)	Frame size	I_{max}(A)	Distance (mm)	Reference
50	1/11	50	27	3629 **9227**
63	2/12	63	32	3629 **9232**
100 … 160	3/13	160	36	3629 **9236**
160	4/14	160	50	3629 **9250**
250	5/15	250	60	3629 **9260**
400	6/16	400	60	3629 **9266**
630 … 800	17	800	94	3629 **9294**
800 … 1250	18	1250	120	3629 **9212**

Solid links

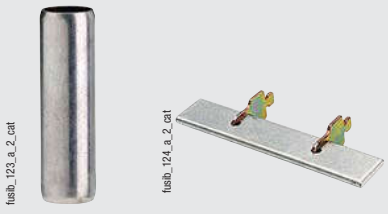

BS88 switches


Rating (A)	Frame size	Fuse size	I_{max} (A)	Reference
32	11	A1	32	3629 **9003**
63	12	A2-A3	63	3629 **9006**
100	13	A4	160	3629 **9010**
CD 160	13a	A3-A4	160	3629 **9010**
160	14	A4	160	3629 **9010**
160	14	B1-B2	200	3629 **9016**
CD 200	13a	A3-A4	160	3629 **9010**
200	15	B1-B2	200	3629 **9016**
250	15	B1-B2-B3	315	3629 **9025**
315	16	B1-B2-B3	315	3629 **9025**
400	16	B1-B2-B3-B4	400	3629 **9040**
630 … 800	17	C1-C3	800	3629 **9063**
1250	18	D1	1250	3629 **9120**

NFC and DIN switches

Rating (A)	Frame size	Fuse size	I_{max} (A)	Reference
50	1/11	14 x 51	50	6029 **0000**
63	2/12	00C	160	6420 **0000**
100 … 125	3/13	22 x 58	125	6039 **0000**
125 … 160	3/13	00	160	6420 **0000**
160	4/14	0	160	6421 **0000**
250	5/15	1	250	6421 **0001**
400	6/16	2	400	6421 **0002**
630 … 800	17	3	630	6421 **0003**
800 ... 1250	18	4	1250	6441 **0005**

U type auxiliary contacts



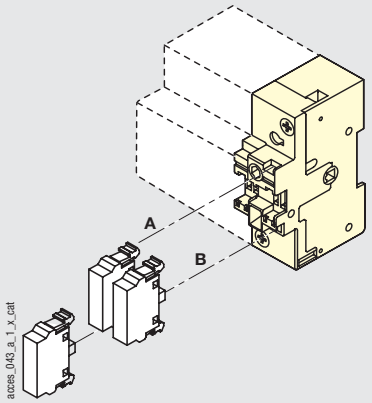

Use
Compact universal type auxiliaries can be configured to be operated on both, standard and TEST position switches from CD 20 to 1250 A. Each slot can accommodate up to 2 interlocked ACs.

Connection to the control circuit
By terminals with max. section 2 x 2.5 mm². For FUSERBLOC CD 20 to 400 A. Pre-break and signalling of positions 0, I and Test. For FUSERBLOC ≥ 630 A: Pre-break and position 0 and I signalling.

References

NO auxiliary contacts

Rating (A)	Frame size	Contact(s)	Reference
CD 20 … 1250	0 … 18	1	3999 **0701**

NC auxiliary contacts

Rating (A)	Frame size	Contact(s)	Reference
CD 20 … 1250	0 … 18	1	3999 **0702**

Contact holder for auxiliary contacts

Rating (A)	Frame size	Contact(s)	Reference(2)
CD 20 … 160	0 … 14	4 (2 x 2 max)	included
250 … 400	15/16	8 (4 x 2 max)	included
630 … 1250	17/18	8 (4 x 2 max)	included

(2) Cannot be mounted in direct operation.

Contact holder for additional auxiliary contacts

Rating (A)	Frame size	Contact(s)	Reference
CD 20 … CD 32	0	4 (2 x 2 max)	3999 **0710**
32 … 400	11 … 16	4 (2 x 2 max)	3999 **0600**

Characteristics

	Operating current I_e (A)			
	250 VAC	400 VAC	24 VDC	48 VDC
Rating (A)	AC-15	AC-15	DC-13	DC-13
CD 20 … 1250	3	1.8	2.8	1.4

A type auxiliary contacts



Use
Pre-break and position 0 and I signalling by 1 or 2 NO /NC auxiliary contacts. For low level use, specific auxiliary contacts: consult us.

Connection to the control circuit
By 6.35 mm fast-on terminal.

Electrical characteristics
30 000 operations.

References

NO / NC auxiliary contacts

Rating (A)	Frame size	Contact(s)	Reference
CD 20 …CD 32	0	1	3999 **0001**
CD 20 …CD 32	0	2	3999 **0001**
32 … 400(1)	1 … 6	1	3999 **0021**(2)
32 … 400(1)	1 … 6	2	3999 **0022**(2)


(1) Side direct operation switch only.
(2) A type auxiliary contacts cannot be mounted conjunction with integrated solid neutral.

Characteristics

		Operating current I_e (A)			
	Current	250 VAC	400 VAC	24 VDC	48 VDC
Rating (A)	nominal (A)	AC-13	AC-13	DC-13	DC-13
CD 20 … 400	16	4	2	12	2

S and ST type auxiliary contacts


acces_051_a_2_cat


acces_083_a_1_cat

Use
For FUSERBLOCs 32 to 1250 A, position 0 and I signalling by 1 to 4 NO + NC auxiliary contacts.

Electrical principle
The NO + NC S type auxiliary contacts can be configured as 2 NC or 2 NO.

Connection
By terminals with max. section 10 mm².

Mechanical characteristics
30 000 operations.

References

S type auxiliary contacts I-0 for external front and right-side operation (Standard operation)

Rating (A)	Frame size	Contact type	Reference
32 … 1250	11 … 18	NC+NO	3999 **0041**

ST type auxiliary contacts I-0-TEST for external front and right-side operation (TEST operation)

Rating (A)	Frame size	Contact type	Description	Reference
32 … 400	11 … 16	NC+NO	TEST + ON	3999 **0141**
32 … 400	11 … 16	2 0	TEST + ON	3999 **0241**

Drive shaft kit for auxiliary contact operation.

Type of AC	Operation type	Reference
S type	Standard	3999 **0003**
ST type	TEST	3999 **0103**

Characteristics

Rating (A)	Current nominal (A)	Operating current I_e (A) 250 VAC AC-13	400 VAC AC-13
32 … 1250	20	10	8

Fuse cover interlocking

Use
On NFC and DIN, side direct operation, locking of the opening of the fuse protection cover when FUSERBLOC is engaged (position I).

Rating (A)	Frame size	Fuse size	No. of poles	Reference
CD 25 … 50	0 … 11	10 x 38 / 14 x 51	2 / 3 / 4	included
63	12	00C	2 / 3 / 4	3999 **8906**
100 … 125	13	22 x 58	2 / 3 / 4	3999 **8912**
125 … 160	13	00	2 / 3 / 4	3999 **8912**
160	14	0	2 P	3999 **8216**
160	14	0	3 P	3999 **8316**
160	14	0	4 P	3999 **8416**
250	15	1	2 P	3999 **8225**
250	15	1	3 P	3999 **8325**
250	15	1	4 P	3999 **8425**
400	16	2	2 P	3999 **8240**
400	16	2	3 P	3999 **8340**
400	16	2	4 P	3999 **8440**

Terminal shrouds



Use

Top or bottom IP 20 protection (at front) against direct contact with terminals or connection parts. 2 sets required to fully shroud both incoming and outgoing terminals.

Rating (A)	Frame size	Position	No. of poles	Reference
CD 20 … 63	0 … 12	top / bottom	2 / 3 / 4 P	integrated
100 … CD 200	13/14	top / bottom	2 P	3998 **2016**
100 … CD 200	13/14	top / bottom	3 P	3998 **3016**
100 … CD 200	13/14	top / bottom	4 P	3998 **4016**
200 … 400	15/16	top / bottom	2 P	3998 **2025**
200 … 400	15/16	top / bottom	3 P	3998 **3025**
200 … 400	15/16	top / bottom	4 P	3998 **4025**
630 … 800	17	top / bottom	2 P	3898 **2080**
630 … 800	17	top / bottom	3 P	3898 **3080**
630 … 800	17	top / bottom	4 P	3898 **4080**
800 … 1250	18	top / bottom	2 P	3898 **2120**
800 … 1250	18	top / bottom	3 P	3898 **3120**
800 … 1250	18	top / bottom	4 P	3898 **4120**

NFC and DIN fuse blowm indication





Use

For fuse cartridge with striker (size 14 x 51 22 x 58; 0; 1; 2; 3 and 4).

Electrical principle

A NO/ NC auxiliary contact detects that the fuse has blown.

Connection to the control circuit

By 6.35 mm fast-on terminal.

Mechanical characteristics

30 000 operations.

References

NO/ NC type auxiliary contacts for 2 pole

Rating (A)	Frame size	Fuse	Contact(s)	Reference
50	11	14 x 51	1st	3994 **0405**
100 … 125	13	22 x 58	1st	3994 **0210**
160	14	0	1st	3994 **0216**
250 … 400	15/16	1-2	1st	3994 **0225**
630	17	3	1st	3894 **1206**
800 … 1250	18	4	1st	3894 **1212**

NO/ NC type auxiliary contacts for 3 pole

Rating (A)	Frame size	Fuse	Contact(s)	Reference
CD 32	0	14 x 51	1st	3994 **0303**
50	11	14 x 51	1st	3994 **0405**
100 … 125	13	22 x 58	1st	3994 **0310**
160	14	0	1st	3994 **0316**
250 … 400	15/16	1-2	1st	3994 **0325**
630	17	3	1st	3894 **1306**
800 … 1250	18	4	1st	3894 **1312**
50 … 1250	11 … 18		2nd	3994 **1901**

NO/ NC type auxiliary contacts for 4 pole or 3 pole + neutral


Rating (A)	Frame size	Fuse	Contact(s)	Reference
50	11	14 x 51	1st	3994 **0405**
100 … 125	13	22 x 58	1st	3994 **0410**
160	14	0	1st	3994 **0416**
250 … 400	15/16	1-2	1st	3994 **0425**
630	17	3	1st	3894 **1406**
800 … 1250	18	4	1st	3894 **1412**
50 … 1250	11 … 18		2nd	3994 **1901**

Characteristics


		Operating current I_e (A)			
Rating (A)	Current nominal (A)	250 VAC AC-13	400 VAC AC-13	24 VDC DC-13	48 VDC DC-13
CD 32 ... 1250	16	4	3	12	2

Cage terminals


acces_053_a_1_cat



acces_091_a_1_x_cat



acces_092_a_1_x_cat

Use
Connection of bare copper cables onto the terminals (without lugs).

References

Rating max (A)	Frame size	No. of poles	Reference
CD 20 … 63	0 … 12	2 / 3 / 4 P	integrated
100 … 160	13/14	3 P	5400 **3016**
100 … 160	13/14	4 P	5400 **4016**
200 … 250	15	3 P	5400 **3025**
200 … 250	15	4 P	5400 **4025**
315 … 400	16	3 P	5400 **3040**
315 … 400	16	4 P	5400 **4040**

Connections

Rating (A)	Section flexible cable (mm²)	Section rigid cable (mm²)	Width flexible bar (mm)	Stripped over (mm)
100 … 160	16 … 95	16 … 95	13	22
250	16 … 185	16 … 185	18	27
400	50 … 240	50 … 300	20	34

Dimensions

Rating (A)	A	A1	C	R	ØX	X1	Z
100 … 160	47.5	22.5	25	20	8.5	M12	10
250	62	31.5	31.5	25	10.5	M16	14
400	71.5	32	38	32	10.5	M20	15

Handle key interlocking accessories



acces_042_a_1_x_cat

Fig. 1



acces_150_a_1_x_cat

Fig. 2



acces_157_a_1_x_cat

Fig. 3

Use
Locking in position 0 of the direct, front or right side operation:
- using padlock (not supplied) in direct operation:
  - integrated into the handle of 20 to 400 A,
  - integrated into the frame of 630 to 1250 A.
- using key interlocking (not supplied) in external operation (see below).

Locking using RONIS EL 11 AP lock (not supplied)

Rating (A)	Frame size	Operation	Figure n°	Reference
CD 20 ... 1250	0 … 18	external front	2	1499 **7701**
32 … 63	1/2	direct	1	3629 **7903**
100 … 400	3…6	direct	1	3629 **7913**
630 … 1250	17 … 18	direct		3829 **7923**

Locking using CASTELL K lock (not supplied)

Rating (A)	Frame size	Operation	Figure n°	Reference
CD 20 … 1250	0 … 18	external front	3	1499 **7702**

Locking using CASTELL FS lock (not supplied)

Rating (A)	Frame size	Operation	Figure n°	Reference
CD 20 … 1250	0 … 18	external front	3	1499 **7703**

Locking using XOP (not included)

Rating (A)	Frame size	Operation	Reference
CD 20 … 1250	0 … 18	external front	1499 **7702**

Label holder



acces_044_a_1_cat

Use
Recognisable self-adhesive label allowing identification of the devices.

Dimensions W x H (mm)	To be ordered in multiples of	Reference
18 x 13	50	7769 **9999**

➲ FUSERBLOC - Characteristics according to IEC 60947-3

20 to 100 A

Thermal current I_{th} (40°C)		20 A	25 A	CD 32 A	CD 32 A	32 A	50 A	63 A	100 A
BS88/DIN fuse size		A1/-	-/10 x 38	-/10 x 38	A1/14 x 51	A1/-	-/14 x 51	A2-A3/00C	A4*/22 x 58
Frame size for direct operation		0	0	0	0	1	1	2	3
Switch body size for front and side operation		0	0	0	0	11	11	12	13
Rated insulation voltage U_i (V)		800	800	800	800	750	750	750	750
Rated impulse withstand voltage U_{imp} (kV)		8	8	8	8	8	8	8	8
Rated operational currents Ie (A)									
Rated voltage	Load duty category	A/B(1)	A/B(1)	A/B(1)	A/B(1)	A/B(1)	A/B(1)	A/B(1)	A/B(1)
400 VAC	AC-22 A / AC-22 B	20/20	25/25	32/32	32/32	32/32	50/50	63/63	100/100
400 VAC	AC-23 A / AC-23 B	20/20	25/25	32/32	32/32	32/32	50/50	63/63	100/100
690 VAC	AC-22 A / AC-22 B	20/20	25/25	32/32	32/32	32/32	50/50	63/63	100(4)/100(4)
690 VAC	AC-23 A / AC-23 B	20/20	25/25	32/32	32/32	32/32	50/50	63/63	100(4)/100(4)
220 VDC	DC-20 A / DC-20 B			-/32		32/32	50/50	63/63	100/100
220 VDC	DC-21 A / DC-21 B		-/25(2)			32/32	40/40	40/40	100/100
440 VDC	DC-20 A / DC-20 B					32(3)/32(3)	50(3)/50(3)	63(3)/63(3)	100(3)/100(3)
440 VDC	DC-21 A / DC-21 B					32(3)/32(3)	40(3)/40(3)	40(3)/40(3)	100(3) / 100(3)
Operational power in AC-23 (kW)									
At 400 VAC without pre-break in AC(1)(5)		9/9	11/11	15/15	15/15	15/15	25/25	30/30	51/51
At 690 VAC without pre-break in AC(1)(5)		15/15	22/22	25/25	25/25	25/25	45/45	55/55	90/90
Reactive power (kvar)									
At 400 VAC(5)		8	11	15	15	15	23	28	45
Fuse protected short-circuit withstand BS88/DIN (kA rms prospective)									
Prospective short-circuit (kA rms)(6)		80/-	-/100	-/100	80/100	80/100	-/100	80/100	80/100
Associated fuse rating (A)(6)		20/-	-/25	-/32	32/32	32/32	-/50	63/63	100/100
Short-circuit capacity									
Rated peak withstand current (kA peak)(6)		5.5	5.5	5.5	5.5	9	7.6	10.6	20
Fuse selection (maximum fuse size)(7)									
SOCOMEC BS88		6A10 0020	6012 0025	6012 0032	6A10 0032	6A10 0032		6A30 0063	6A40 0100
SOCOMEC BS88		6A1M 0032	6013 0025	6013 0032	6A1M 0063	6A1M 0032		6A3M 0080	6A4M 0125
SOCOMEC DIN							6022 0050	6600 0063	6032 0100
SOCOMEC DIN							6023 0050	6601 0063	6033 0100
BUSSMANN		NITD 20			NITD 32	NITD 32		BA0 63	CE0 100
BUSSMANN		NITD 20M32			NITD 32M63	NITD 32M63		BA0 63M80	CE0 100M125
LAWSON		NIT 20			NIT 32	NIT 32		TIS 63	TCP 100
LAWSON		NIT 20M32				NIT 20M32		TIS 63M80	CTFP100M125
GE		NIT 20			NET 32	NET 32		TIS 63	TCP 100
GE		NIT 20M32			NET 32M63	NET 32M63		TIS 63M80	OCP 100M125
Connection									
Minimum Cu cable section (mm^2)		2.5	2.5	2.5	2.5	6	6	10	25
Maximum Cu cable section (mm^2)		16	16	16	16	25	25	25	95
Maximum busbar width (mm)									20
Min. / Max. tightening torque min (Nm)		2/-	2/-	2/3	2	2.5/3	2.5/3	2.5/3	8.3/13
Mechanical characteristics									
Durability (number of operating cycles)		20 000	20 000	20 000	20 000	10 000	10 000	10 000	10 000
Weight of 3 P switch (kg)		0.48	0.48	0.48	0.50	0.80	0.80	1	1.5
Weight of 4 P switch (kg)		0.50	0.50	0.50	0.52	1	1	1.3	2
Weight of 1 P extra (kg)						0.2	0.2	0.3	0.5
Frame pitch (mm)						32	27	32	36

(1) Category with index A = frequent operation - Category with index B = infrequent operation.
(2) With terminal shrouds or terminal screen.
(3) 4-pole device with 2 pole in series by polarity.
(4) Poles cannot be juxtaposed.
(5) The power value is given for information only, the current values vary from one manufacturer to another.
(6) For a rated operational voltage U_e = 400 VAC.
(7) Fuse 800 A, 690 Vac does not exist, tests conducted with bars.
** For fuse size A4: max diameter 31 mm.*
*** Please ensure that fuse let through current does not exceed short-circuit capacity of the switch (kA peak).*

125 to 200 A

Thermal current I_{th} (40°C)		**125 A**	**125 A**	**160 A**	**CD 160 A**	**160 A**	**160 A**	**CD 200 A**	**200 A**
NFC/DIN fuse size		-/22 x 58	-/00	-/00	A3-A4*/-	A4/0	B1-B2/-	A3-A4*/-	B1-B2/-
Frame size for direct operation		3	3	3		4	4		5
Switch body size for front and side operation		13	13	13	13a	14	14	13a	15
Rated insulation voltage U_i (V)		750	750	750	750	750	750	800	750
Rated impulse withstand voltage U_{imp} (kV)		8	8	8	8	8	8	8	8
Rated operational currents Ie (A)									
Rated voltage	Load duty category	A/B[1]	A/B[1]	A/B[1]	A/B[1]	A/B[1]	A/B[1]	A/B[1]	A/B[1]
400 VAC	AC-22 A / AC-22 B	125/125	125/125	160/160	160/160	160/160	160/160	200/200	200/200
400 VAC	AC-23 A / AC-23 B	125/125	125/125	160/160	160/160	160/160	160/160	200/200	200/200
690 VAC	AC-22 A / AC-22 B	125[2]/125[2]	125[2]/125[2]	160[2]/160[2]	160[2]/160[2]	160[2]/160[2]	160[2]/160[2]	160[2]/160[2]	200[2]/200[2]
690 VAC	AC-23 A / AC-23 B	100[2]/100[2]	100[2]/100[2]	125[2]/125[2]	125[2]/125[2]	125[2]/125[2]	125[2]/125[2]	125[2]/125[2]	200[2]/160[2]
220 VDC	DC-20 A / DC-20 B	125/125	125/125	160/160	160/160	160/160	160/160	160/160	200/200
220 VDC	DC-21 A / DC-21 B	100/100	100/100	125/125	125/125	125/125	125/125	125/125	200/200
440 VDC	DC-22 A / DC-22 B	125[3]/125[3]	125[3]/125[3]	160[3]/160[3]	160[3]/160[3]	160[3]/160[3]	160[3]/160[3]	160[3]/160[3]	200[3]/200[3]
440 VDC	DC-23 A / DC-23 B	100[3]/100[3]	100[3]/100[3]	125[3]/125[3]	160[3]/160[3]	125[3]/125[3]	125[3]/125[3]	125[3]/125[3]	200[3]/200[3]
Operational power in AC-23 (kW)									
At 400 VAC without pre-break in AC[1][5]		63/63	63/63	80/80	80/80	80/80	80/80	80/80	100/100
At 690 VAC without pre-break in AC[1][5]		90/90	90/90	110/110	110/110	110/110	110/110	110/110	150/185
Reactive power (kvar)									
At 400 VAC[5]		55	55	75	70	75	75	90	90
Fuse protected short-circuit withstand (kA rms prospective)									
Prospective short-circuit (kA rms)[6]		-/100	-/100	-/100 (50)	50/-	80/100	80/100	50/-	80/-
Associated fuse rating (A)[6]		-/125	-/125	-/125 (160)	160/-	160/160	160/160	200/-	200/-
Short-circuit capacity									
Rated peak withstand current (kA peak)[6]		20	20	20	20	22.7	22.7	20	32.5
Fuse selection (maximum fuse size)[7]									
SOCOMEC BS88						6A4 0160	6B20 0160	6B20 0200	6B20 0200
SOCOMEC BS88					6A40 0160	6A4M 0160	6B1M 0200	6B2M 0315	6B2M 0315
SOCOMEC DIN		6032 0125	6692 0125	6692 0160		6702 0160			
SOCOMEC DIN		6033 0125	6693 0125	6693 0160		6703 0160			
BUSSMANN					DEO 160	DEO 160	DD 160	DD 200	DD 200
BUSSMANN					CEO 100M160	DEO 100M200	CD 100M200	DD 200M315	DD 200M315
LAWSON					CTFP 160	TFP 160	TF 160	TF 200	TF 200
LAWSON					CTCP 100M160	TCP 100M200	TCP 100M200	TC 200M315	TC 200M315
GE					TCP 100	TFP 160	TF 160	TF 200	TF 200
GE					OCP 100M160	TCP 100M201	TC 100M200	TF 200M315	TF 200M315
Connection									
Minimum Cu cable section (mm^2)		35	35	35	35	50	50	95	95
Maximum Cu cable section (mm^2)		95	95	95	95	95	95	240	240
Maximum busbar width (mm)		20	20	20	20	20	20	32	32
Tightening torque min (Nm)		8.3/13	8.3/13	8.3/13	8.3/13	8.3/13	8.3/13	20/26	20/26
Mechanical characteristics									
Durability (number of operating cycles)		10 000	10 000	10 000	10 000	10 000	10 000	10 000	10 000
Weight of 3 P switch (kg)		1.5	1.5	1.8	1.8	1.8	1.8	3.2	3.2
Weight of 4 P switch (kg)		2	2	2.3	2.3	2.3	2.3	4.5	4.5
Weight of 1 P extra (kg)		0.5	0.5	0.5	0.5	0.5	0.5	1.3	1.3
Frame pitch (mm)		36	36	36	50	50	50	60	60

(1) Category with index A = frequent operation - Category with index B = infrequent operation.
(2) With terminal shrouds or terminal screen.
(3) 4-pole device with 2 pole in series by polarity.
(4) Poles cannot be juxtaposed.
(5) The power value is given for information only, the current values vary from one manufacturer to another.
(6) For a rated operational voltage U_e = 400 VAC.
(7) Fuse 800 A, 690 Vac does not exist, tests conducted with bars.
** For fuse size A4: max diameter 31 mm.*
*** Please ensure that fuse let through current does not exceed short-circuit capacity of the switch (kA peak).*

250 to 1250 A

Thermal current I_{th} (40°C)	**250 A**	**315 A**	**400 A**	**630 A**	**800 A**	**800 A**	**1250 A**
NFC/DIN fuse size	B1-B2-B3/1	B1-B2-B3/-	B1-B2-B3-B4/2	C1-C2/3	C1-C2-C3/3	-/4	D1/4
Frame size for direct operation	5	6	6	17	17	18	18
Switch body size for front and side operation	15	16	16	17	17	18	18
Rated insulation voltage U_i (V)	750	800	800	1000	1000	1000	1000
Rated impulse withstand voltage U_{imp} (kV)	8	8	8	12	12	12	12
Rated operational currents Ie (A)							
Rated voltage / Load duty category	A/B[1]	A/B[1]	A/B[1]	A/B[1]	A/B[1]	A/B[1]	A/B[1]
400 VAC AC-22 A / AC-22 B	250/250	315/315	400/400	630/630	800/800	800/800	1250/1250
400 VAC AC-23 A / AC-23 B	250/250	315/315	400/400	630/630	800/800	800/800	1000/1250
690 VAC AC-22 A / AC-22 B	250[2]/250[2]	315[2]/315[2]	315/400	500/630	800/800	800/800[7]	800/1250
690 VAC AC-23 A / AC-23 B	250[2]/250[2]	250[2]/315[2]	250/315	315/400	630/630	800/800[7]	800/630
220 VDC DC-20 A / DC-20 B	250/250	250/250	315/315	315/630	800/800	800/800	1250/1250
220 VDC DC-21 A / DC-21 B	200/200	200/200	200/315	400/630	800/800	800/800	1250/1250
440 VDC DC-22 A / DC-22 B	250[3] / 250[3]	250[3] / 250[3]	315[4]/315[4]	315/630[4]	800[3] / 800[3]	800/800	1000[3] / 1000[3]
440 VDC DC-23 A / DC-23 B	200[3] / 200[3]	200[3] / 200[3]	250[4] / 315[4]	400[4]/630[4]	800[3] / 800[3]	800/800[3]	1000[3] / 1000[3]
Operational power in AC-23 (kW)							
At 400 VAC without pre-break in AC[1][5]	132/132	160/160	220/220	355/355	450/450	450/450	560/560
At 690 VAC without pre-break in AC[1][5]	220/220	220/295	220/295	295/400	400/400	400/400	400/475
Reactive power (kvar)							
At 400 VAC[5]	115	145	185	290	365	355	460
Fuse protected short-circuit withstand (kA rms prospective)							
Prospective short-circuit (kA rms)[6]	80/100	80/-	80/50	80/100	80/100	-/100	-/100
Associated fuse rating (A)[6]	250/250	315/-	400/400	630/630	800/800	-/800	-/1250
Short-circuit capacity							
Rated peak withstand current (kA peak)[6]	32.5	40	40	70	80	80	90
Fuse selection (maximum fuse size)[7]							
SOCOMEC BS88	6B20 0250	6B30 0315	6B40 0400	6C20 0630	6C30 0800		
SOCOMEC BS88	6B2M 3015	6B3M 0400	6B4M 0500				
SOCOMEC DIN	6712 0250		6722 0400	6732 0400		6746 0800	6746 1200
SOCOMEC DIN	6713 0250		6723 0400	6733 0400		6747 0800	6747 1200
BUSSMANN	ED 250	ED 315	ED 400	FF 630	GF 800		
BUSSMANN	DD 200M315	ED 315M400	ED 400M500				
LAWSON	TKF 250	TKF 315	TMF 400	TTM 630	TLM 800		
LAWSON	TF 200M315	TKF 315M400	TMF 400M500				
GE	TKF 250	TKF 315	TMF 400	TTM 630	TLM 800		
GE	TF 200M315	TKF 315M355	TMF 400M450				
Connection							
Minimum Cu cable section (mm^2)	95	185	185	2 x 150	2 x 185		
Maximum Cu cable section (mm^2)	240	240	240	2 x 300	2 x 300	4 x 185	4 x 185
Maximum busbar width (mm)	32	45	45	63	63	80	80
Tightening torque min (Nm)	20/26	20/26	20/26	40/45	40/45	40/45	40/45
Mechanical characteristics							
Durability (number of operating cycles)	10 000	10 000	10 000	8 000	8 000	5 000	5 000
Weight of 3 P switch (kg)	3.2	4.8	4.8	16	17	25	25
Weight of 4 P switch (kg)	4.5	6.1	6.1	20	21.5	30	30
Weight of 1 P extra (kg)	1.3	1.3	1.3			3	3
Frame pitch (mm)	60	66	66	94	94	120	120


(1) Category with index A = frequent operation - Category with index B = infrequent operation.
(2) With terminal shrouds or terminal screen.
(3) 4-pole device with 2 pole in series by polarity.
(4) Poles cannot be juxtaposed.
(5) The power value is given for information only, the current values vary from one manufacturer to another.
(6) For a rated operational voltage U_e = 400 VAC.
(7) Fuse 800 A, 690 Vac does not exist, tests conducted with bars.
*** Please ensure that fuse let through current does not exceed short-circuit capacity of the switch (kA peak).*

➲ FUSERBLOC - Dimensions

External operation


BS88 - FUSERBLOC CD 20 to CD 32 A in size A1

External front operation

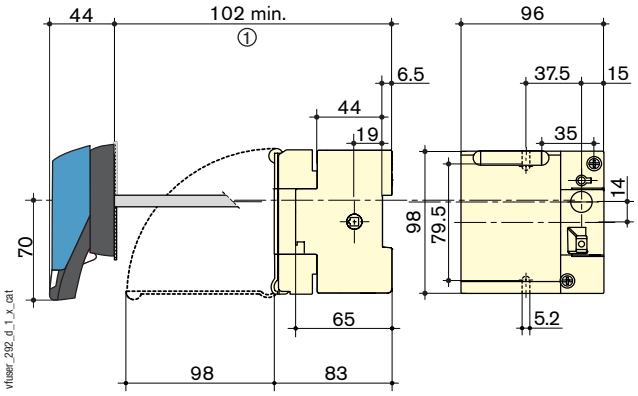


1. With 1 U type AC: 130 mm
With 2 U type AC: 155 mm.

External side operation

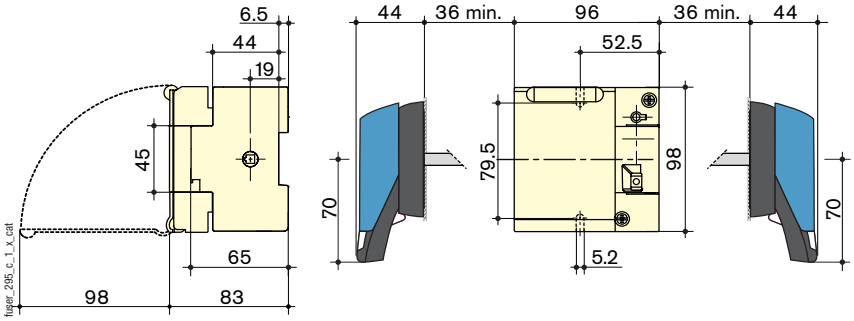

External front operation fuse combination changeover

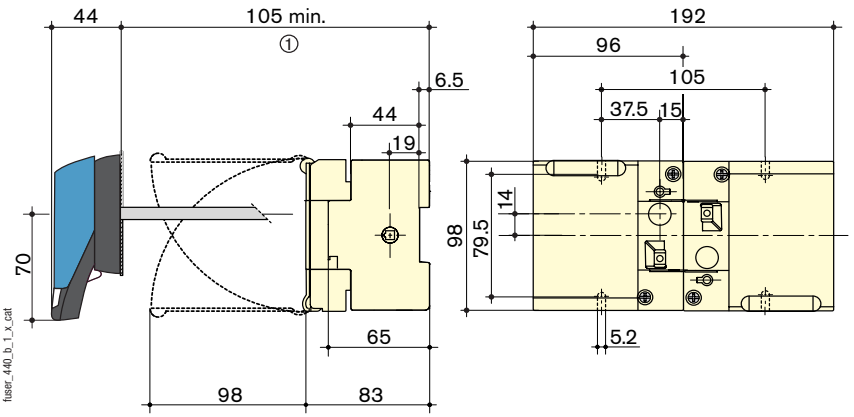


1. With 1 U type AC: 130 mm
With 2 U type AC: 155 mm.


External operation

NFC and DIN - FUSERBLOC 25 to 32 A in size 10 x 38

External front operation

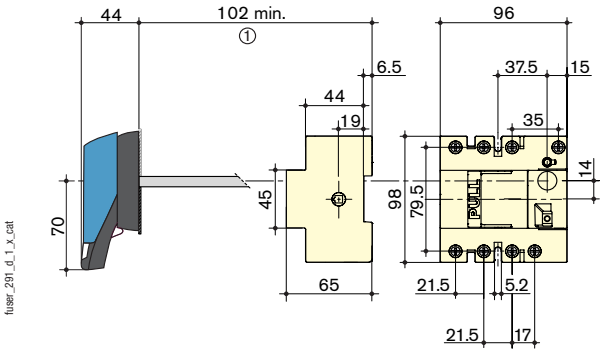


External side operation

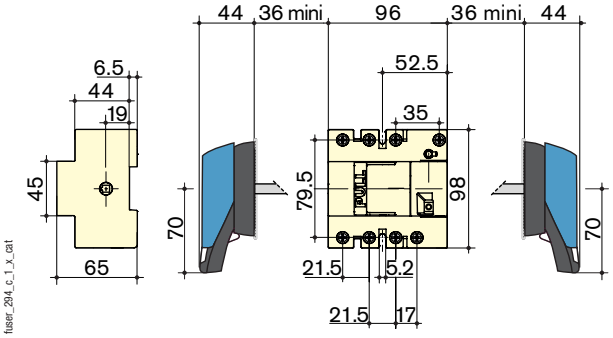


1. With 1 U type AC: 130 mm.
With 2 U type AC: 155 mm.

NFC and DIN - FUSERBLOC 32 A in size 14 x 51

External front operation

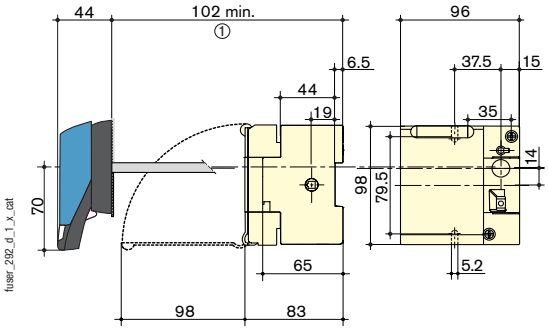


External side operation

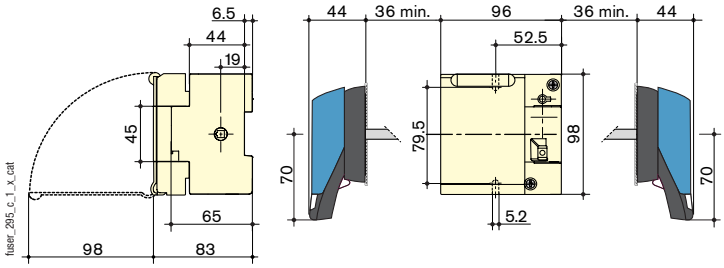

1. With 1 U type AC: 130 mm.
With 2 U type AC: 155 mm.

NFC and DIN - FUSERBLOC 25 to 32 A in size 10 x 38 and 14 x 51


External front operation fuse combination changeover

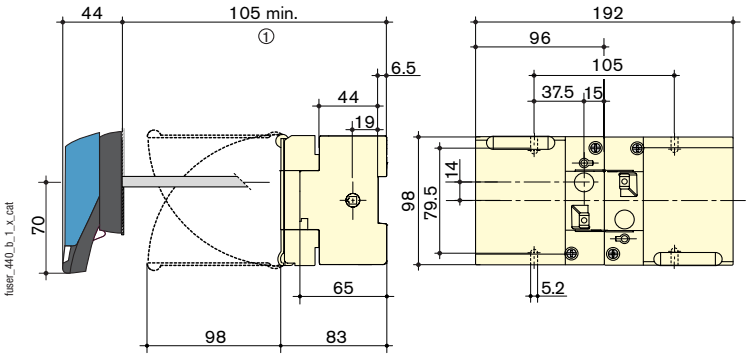


1. With 1 U type AC: 130 mm.
With 2 U type AC: 155 mm.


External front or right side operation

BS88 - FUSERBLOC 32 A in fuse size A1

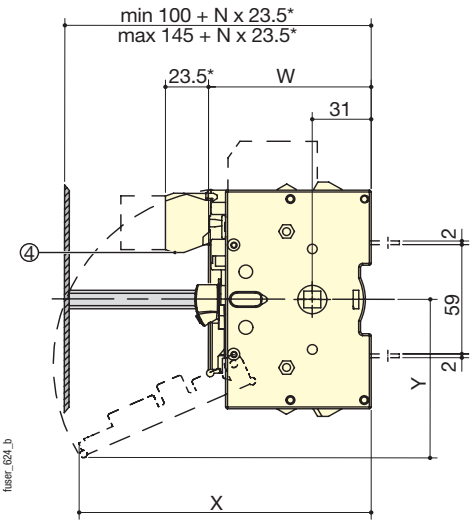

NFC and DIN - FUSERBLOC 50 A in fuse size 14 x 51

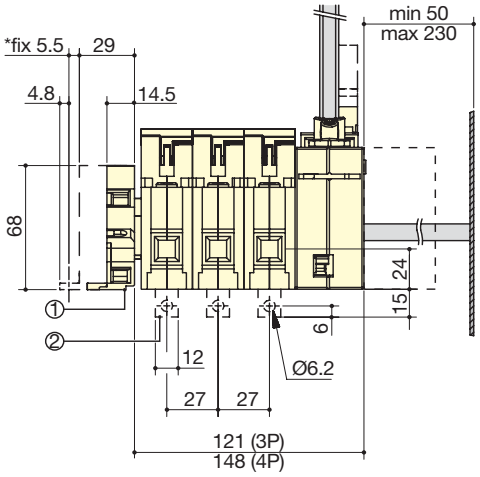

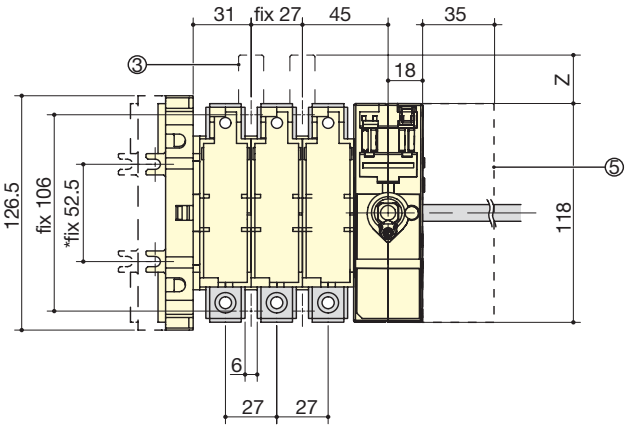


** to use if pre-break auxiliary contact number > 4*
W : 84.5 for BS88 ; 87 for NFC and DIN
X : 153 only for DIN
Y : 85 only for DIN
Z : 26 only for DIN


1. S type auxiliary contact NO + NC to use if block number > 4
2. Rear connection (option)
3. 1 or 2 pre-break auxiliary contact (fuse blown indication)
4. 1 to 4 pre-break auxiliary contact for signalisation
5. Additional contact holder for U type AC


➲ Dimensions for external handles


BS88 - FUSERBLOC 32 to 63 A
NFC and DIN - FUSERBLOC 25 to 63 A


Handle type	Front operation		Side operation	
	Direction of operation	Door drilling	Direction of operation	Door drilling
S1 type Box size 0				













External front or right side operation

BS88 - FUSERBLOC 63 A in fuse size A2 - A3

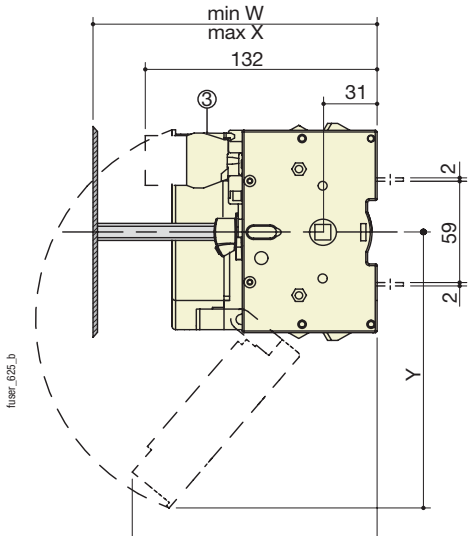


** to use if pre-break auxiliary contact number > 4*
W : 124 + N x 23.5 for BS88 ; 139 for NFC and DIN
X : 145 + N x 23.5 for BS88 ; 145 for NFC and DIN
Y : 159 only for DIN
Z : 145 only for DIN

NFC and DIN - FUSERBLOC 63 A in fuse size 00C

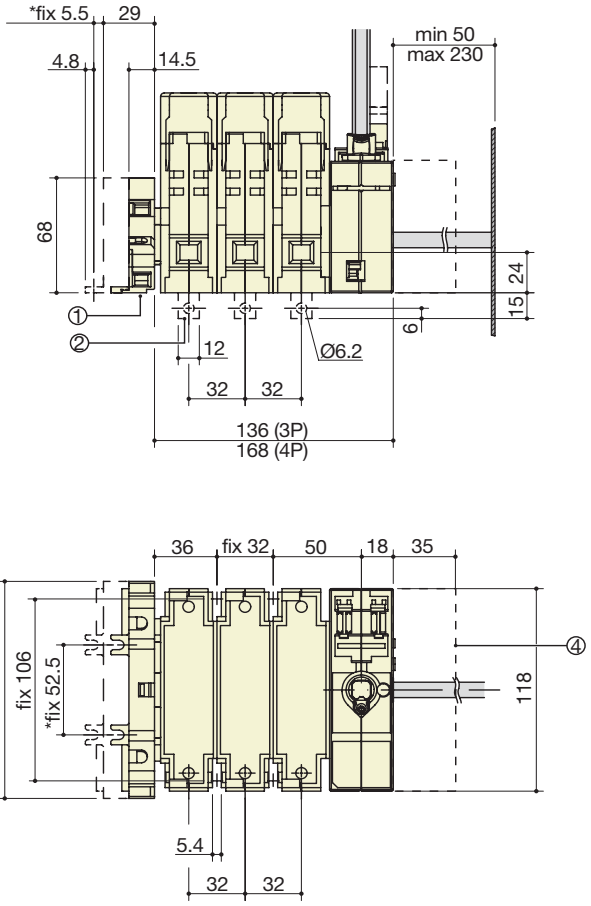


1. S type auxiliary contact NO + NC to use if block number > 4
2. Rear connection (option)
3. 1 to 4 pre-break auxiliary contact for signalisation
4. Additional contact holder for U type AC


BS88 - FUSERBLOC 100 A in fuse size A4 - max Ø 31 mm

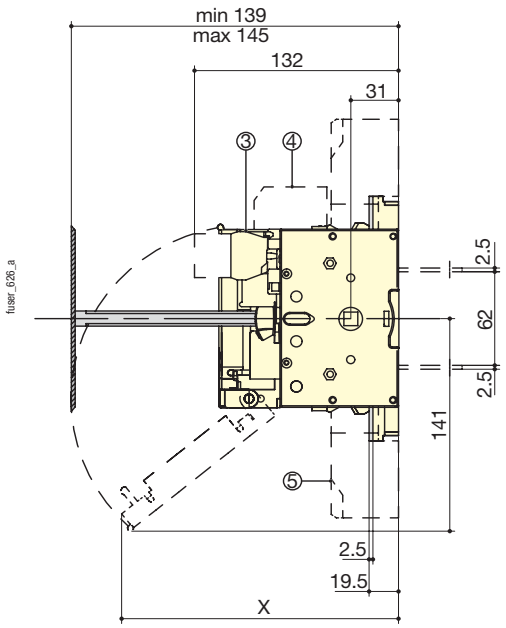

** to use if pre-break auxiliary contact number > 4*
X : 179 for BS88 / NFC and DIN 100 to 125 A
189 for NFC and DIN 125 to 160 A

NFC and DIN - FUSERBLOC 100 to 125 A in fuse size 22 x 58
FUSERBLOC 125 to 160 A in fuse size 00

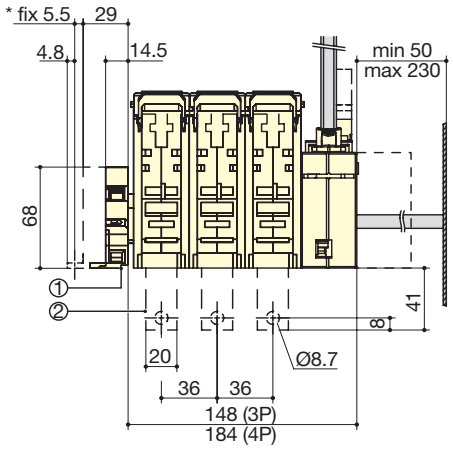


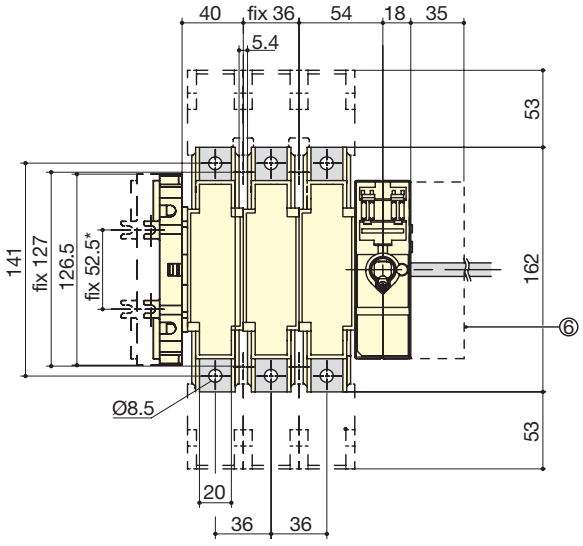



1. S type auxiliary contact NO + NC to use if block number > 4
2. Rear connection (option)
3. 1 to 4 pre-break auxiliary contact for signalisation
4. 1 or 2 pre-break auxiliary contact (fuse blown indication)
5. Terminal shrouds
6. Additional contact holder for U type AC

External front or right side operation

BS88 - FUSERBLOC CD 160 to CD 200 A in fuse size A3-A4 (A4 max Ø 31 mm)

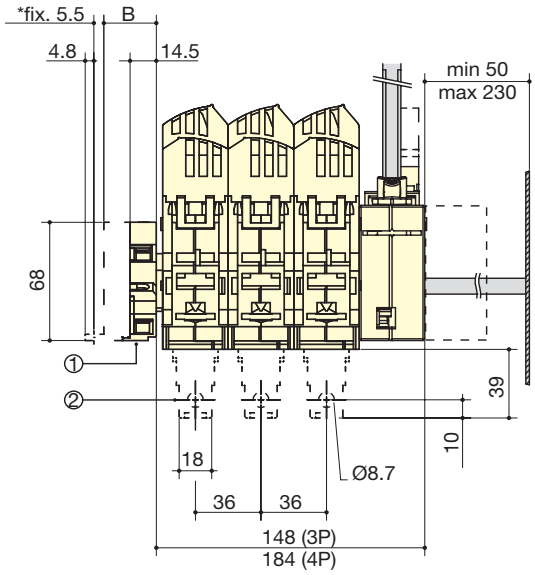


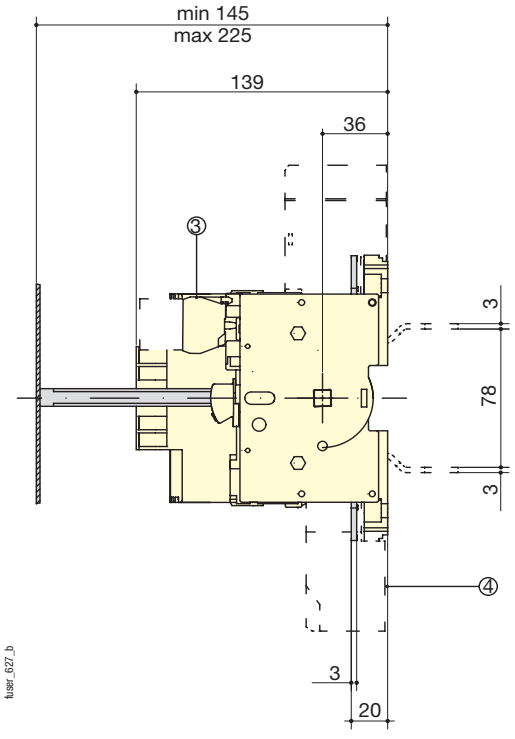

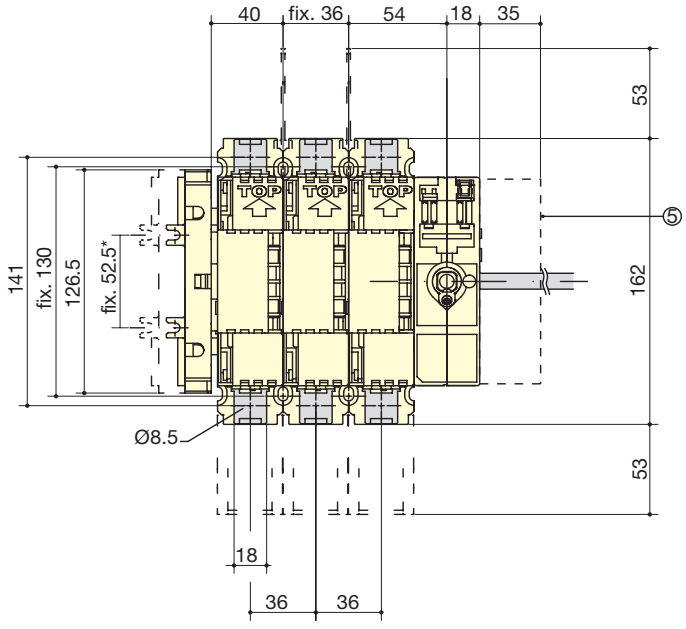


** to use if pre-break auxiliary contact number > 4*
1. S type auxiliary contact NO + NC to use if block number > 4
2. Rear connection (option)
3. 1 to 4 pre-break auxiliary contact for signalisation
4. Terminal shrouds
5. Additional contact holder for U type AC


BS88 - FUSERBLOC 160 A in fuse size A4 & B1-B2

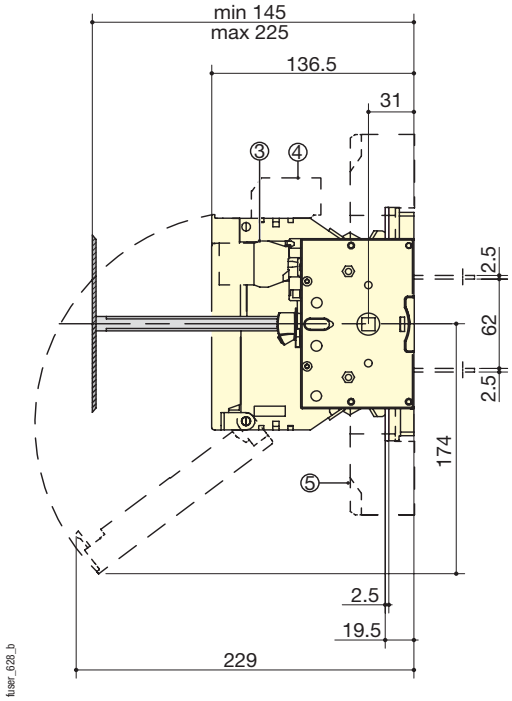

** to use if pre-break auxiliary contact number > 4*
1. S type auxiliary contact NO + NC to use if block number > 4
2. Rear connection (option)
3. 1 to 4 pre-break auxiliary contact for signalisation

NFC and DIN - FUSERBLOC 160 A in fuse size 0

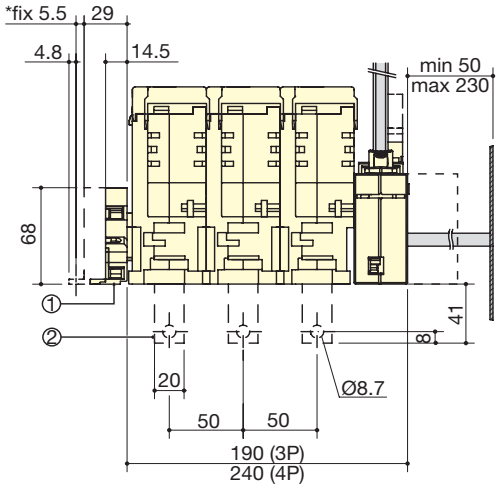


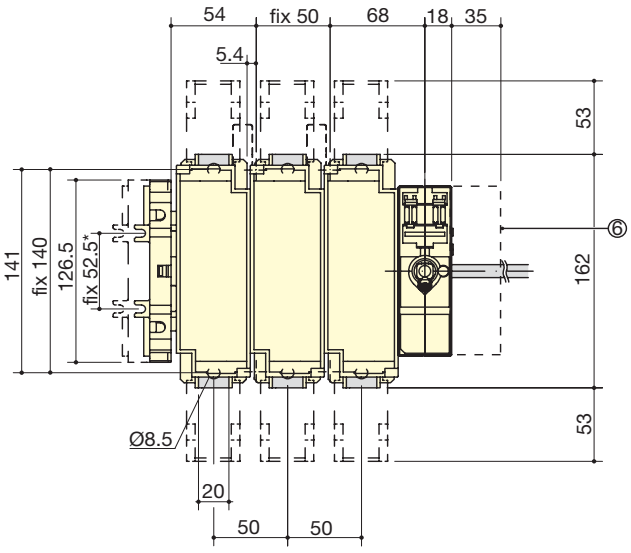

4. 1 or 2 pre-break auxiliary contact (fuse blown indication)
5. Terminal shrouds
6. Additional contact holder for U type AC


External front or right side operation


BS88 - FUSERBLOC 200 A in fuse size B1-B2
FUSERBLOC 250 A in fuse size B1-B2-B3

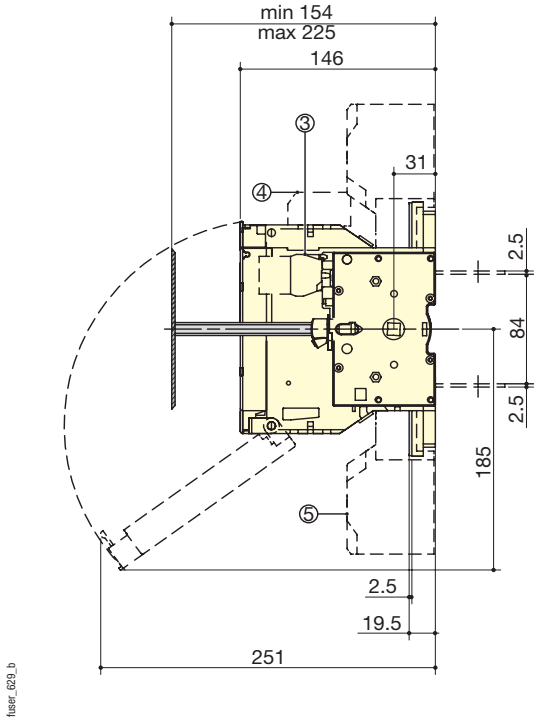

** to use if pre-break auxiliary contact number > 4*
1. S type auxiliary contact NO + NC to use if block number > 4
2. Rear connection (option)
3. 1 to 8 pre-break auxiliary contact for signalisation


NFC and DIN - FUSERBLOC 250 A in fuse size 1

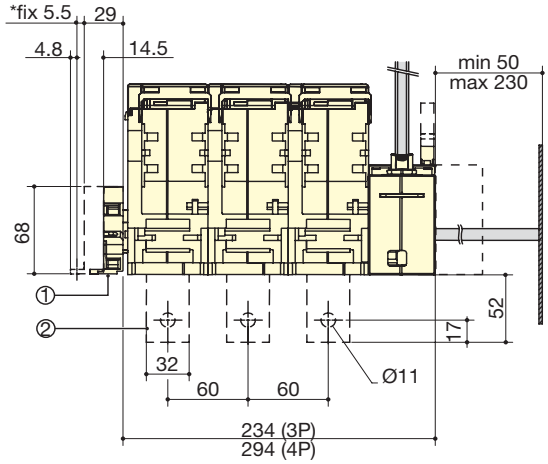

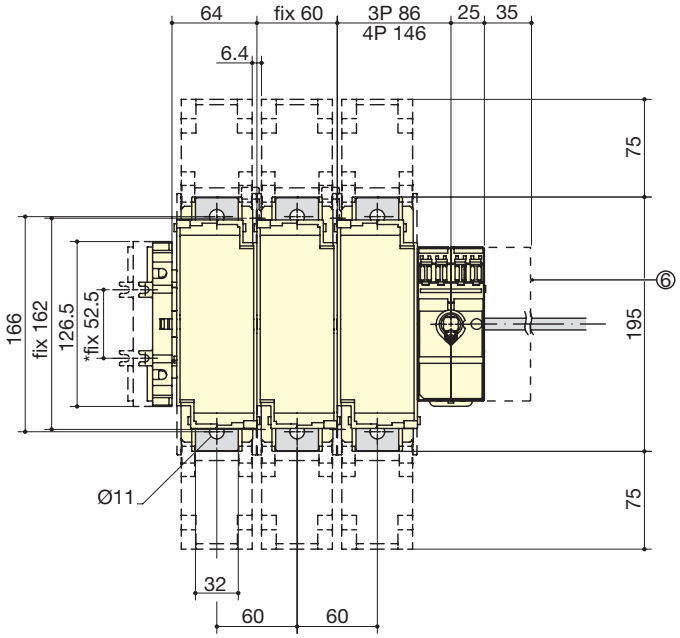


4. 1 or 2 pre-break auxiliary contact (fuse blown indication)
5. Terminal shrouds
6. Additional contact holder for U type AC


BS88 - FUSERBLOC 315 A in fuse size B1-B2-B3
FUSERBLOC 400 A in fuse size B1-B2-B3-B4

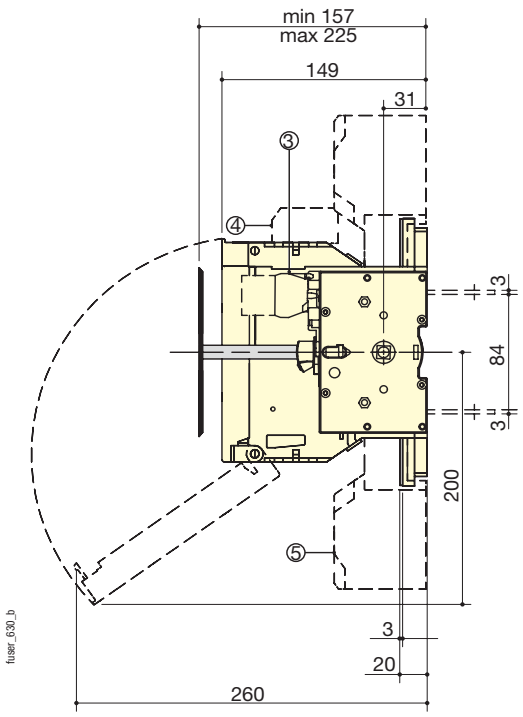

** to use if pre-break auxiliary contact number > 4*
1. S type auxiliary contact NO + NC to use if block number > 4
2. Rear connection (option)
3. 1 to 8 pre-break auxiliary contact for signalisation4. 1 or 2 pre-break auxiliary contact (fuse blown indication)
5. Terminal shrouds
6. Additional contact holder for U type AC





NFC and DIN - FUSERBLOC 400 A in fuse size 2

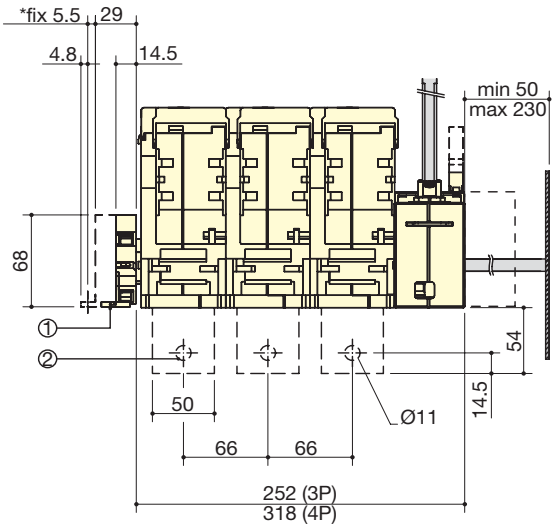


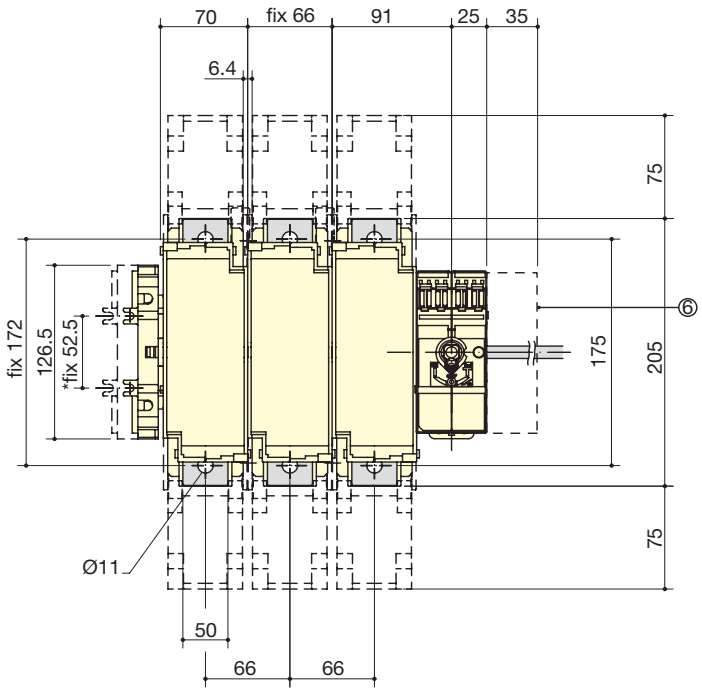

Dimensions for external handles


BS88 / NFC and DIN - FUSERBLOC 100 to 400 A


Handle type	Front operation		Side operation	
	Direction of operation	Door drilling	Direction of operation	Door drilling
S2 type Box size 11-16				




BS88 - External front operation fuse combination changeover

FUSERBLOC 32 to 400 A

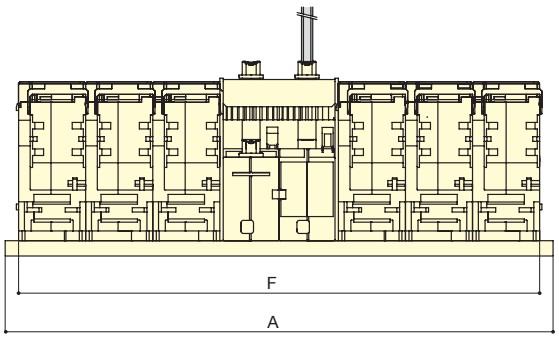

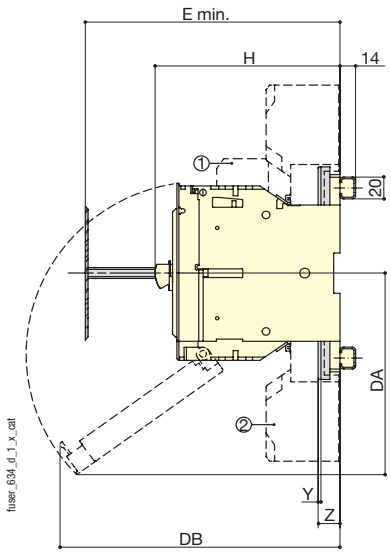

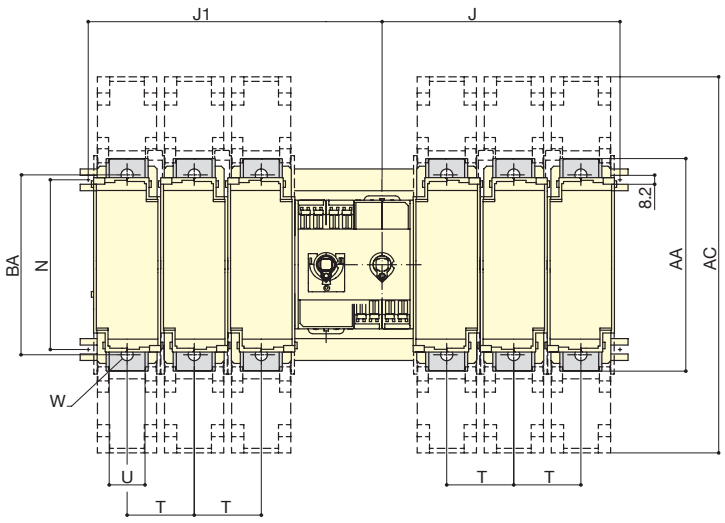

A. S1 handle: 32 and 63 A
B. S2 handle: 100 to 400 A
C. Door drilling


1. Fuse blown indicaion not available for BS88
2. Terminal shrouds


Rating (A)	Fuse size	Frame size	Dimensions A 3p.	A 4p.	E min	E max	Terminal shrouds AC	Switch body F 3p.	F 4p.	H	J 3p.	J 4p.	J1 3p.	J1 4p.	DA	DB	Switch mounting N	Connection T	U	W	Y	Z	AA	BA
32	A1	11	264	318	100(1)	146(1)		242	296	87	102	129	138	165	85	153	90	27					118	
63	A2-A3	12	294	358	124	145		272	336	116.5	121	153	157	189	159	145	90	32					118	
100	A4	13	318	390	124	145	268	296	368	116(2)	133	169	169	205	141	179	128	36	20	8.5	2.5	19.5	162	141
CD 160	A3-A4	13a	318	390	145	225	268	296	368	139	133	169	169	205			128	36	18	8.5	3	20	162	141
160	A4	14	402	502	124	225	268	380	480	136.5	176	226	212	262	174	229	128	50	20	8.5	2.5	19.5	162	141
160	B1-B2	14	402	502	130	225	268	380	480	136.5	176	226	212	262	174	229	128	50	20	8.5	2.5	19.5	162	141
CD 200	A3-A4	13a	318	390	145	225	268	296	368	139	133	169	169	205			128	36	18	8.5	3	20	162	141
200	B1-B2	15	490	610	130	225	345	468	588	146	213	273	263	323	185	251	155	60	32	11	2.5	19.5	195	166
250	B1-B2-B3	15	490	610	154	225	345	468	588	146	213	273	263	323	185	251	155	60	32	11	2.5	19.5	195	166
315	B1-B2-B3	16	526	658	154	225	355	504	636	149	231	297	281	347	200	260	168	66	50	11	3	20	205	175
400	B1-B2-B3-B4	16	526	658	157	225	355	504	636	149	231	297	281	347	200	260	168	66	50	11	3	20	205	175


(1) 1 AC: + 23.5 mm / 2 AC: + 47 mm.
(2) 132 mm with 2 AC.

NFC and DIN - External front operation fuse combination changeover

FUSERBLOC 50 to 400 A

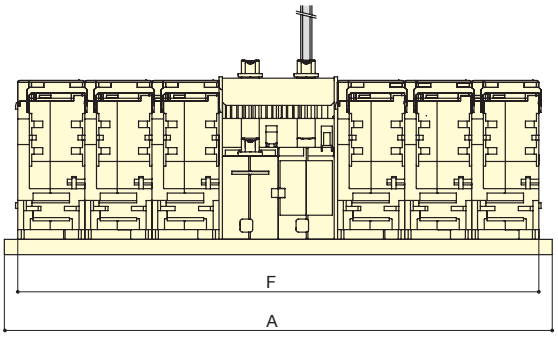

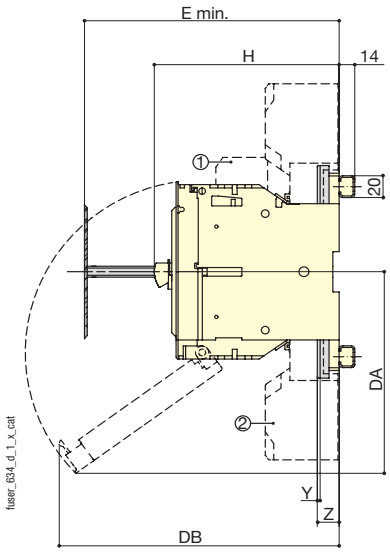

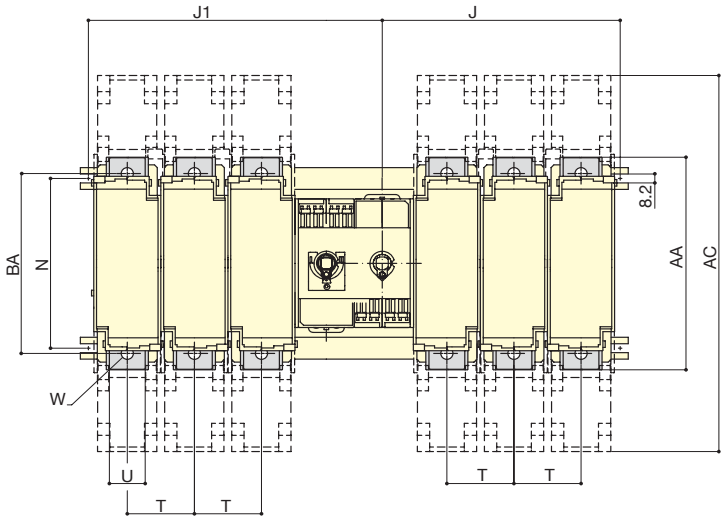

A. S1 handle: 50 and 63 A
B. S2 handle: 100 to 400 A
C. Door drilling


1. Fuse blown indicaion not available for BS88
2. Terminal shrouds

Rating (A)	Fuse size	Frame size	Overall dimensions A 3p	A 4p	E min	E max	Terminal shrouds AC	Switch body F 3p.	F 4p.	H	J 3p	J 4p	J1 3p	J1 4p	DA	DB	Switch mounting N	Connection T	U	W	Y	Z	AA	BA
50	14 x 51	11	264	318	100(1)	146(1)		121	148	87(1)	102	129	138	165	85	153	90	27					118	
63	00C	12	294	358	125	145		136	168	116.5(2)	121	153	158	189	159	145	90	32					118	
100	22 x 58	13	318	390	135	145	268	148	184	116(2)	133	169	169	205	141	187	128	36	20	8.5	2.5	19.5	162	141
125	22 x 58	13	318	390	135	145	268	148	184	116(2)	133	169	169	205	141	179	128	36	20	8.5	2.5	19.5	162	141
125	00	13	318	390	135	145	268	148	184	126.5	133	169	169	205	141	193	128	36	20	8.5	2.5	19.5	162	141
160	00	13	318	390	135	145	268	148	184	126.5	133	169	169	205	141	193	128	36	20	8.5	2.5	19.5	162	141
160	0	14	402	502	145	225	268	190	240	136.5	176	226	212	262	174	229	128	50	20	8.5	2.5	19.5	162	141
250	1	15	490	610	154	225	345	234	294	146	213	273	263	323	185	251	155	60	32	11	2.5	19.5	195	166
400	2	16	526	658	157	225	355	252	318	149	231	297	281	347	200	260	168	66	50	11	3	20	205	175


(1) 1 AC: +23.5 / 2 AC: +47
(2) 132 with 2 AC

BS88 - Direct operation

FUSERBLOC CD 20 to CD 32 A in frame size 0 / fuse size A1

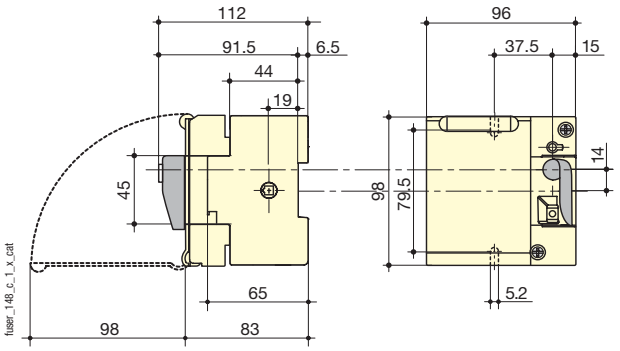

FUSERBLOC 32 to 400 A

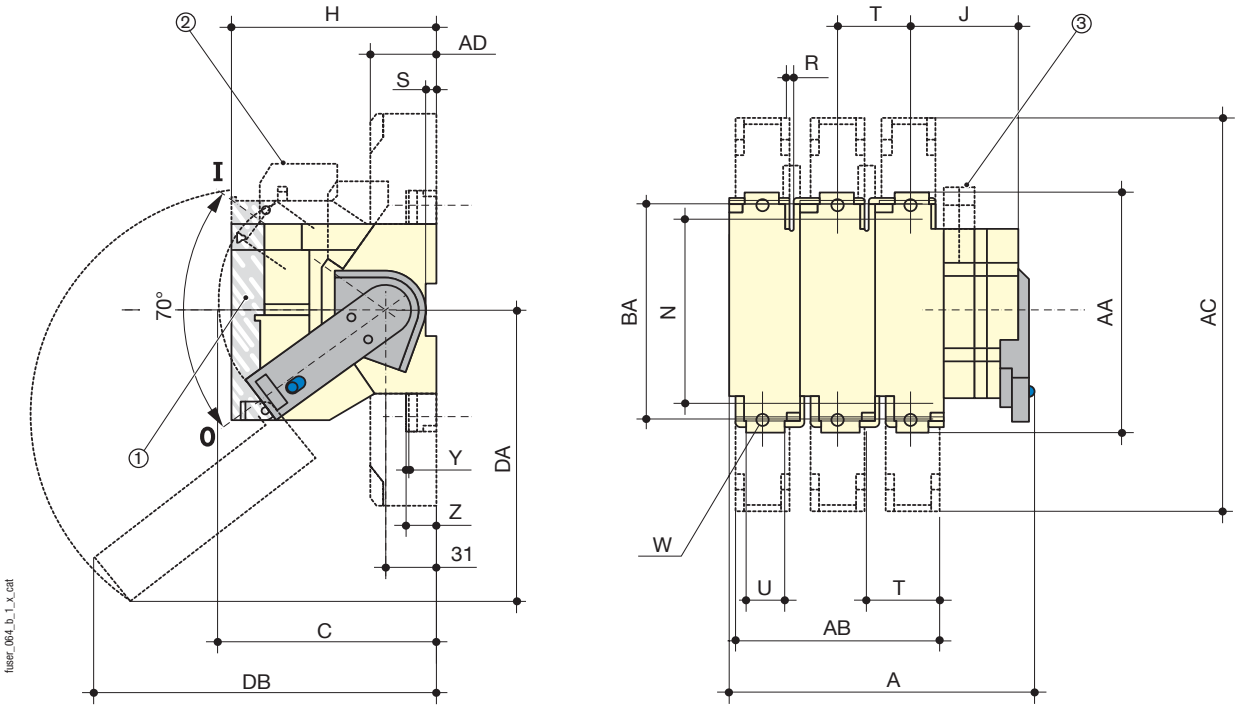


1. Protection screen lockable in position I
2. 1 or 2 fuse blown indication.
3. 1 or 2 A type ACs


Rating		Frame	Dimensions			Terminal shrouds				Switch body				Switch mounting			Connection						
(A)	Fuse size	size	A 3p.	A 4p.	C	AB 3p	AB 4p	AC	AD	H	J	DA	DB	N	R	S	T	U	W	Y	Z	AA	BA
32	A1	1	133	165	134					116.5	36	159	145	106	5.4	6.5	27					118	
63	A2-A3	2	133	165	134					116.5	36	159	145	106	5.4	6.5	32					118	
100	A4	3	150	186	173	108	144	268	44	116	38			127	5.4		36	20	8.5	2.5	19.5	162	141
CD 160	A3-A4	3a	152	188	173	108	144	268	44	139	38			130	5.4		36	20	8.5	3	19.5	162	141
160	A4	4	150	186	173	108	144	268	44	116	38			127	5.4		50	20	8.5	2.5	19.5	162	141
160	B1-B2	4	192	242	173	136	172	268	44	123	45			140	5.4		50	20	8.5	2.5	19.5	162	141
CD 200	A3-A4	3a	152	188	173	108	144	268	44	139	38			130	5.4		36	20	8.5	3	19.5	162	141
200	B1-B2	5	192	242	173	136	172	345	44	123	45			140	5.4		60	20	8.5	2.5	19.5	195	166
250	B1-B2-B3	5	253	313	173	180	240	345	65	146	81	185	251	162	6.4		60	32	11	2.5	19.5	195	166
315	B1-B2-B3	6	253	313	173	180	240	355	65	146	81	185	251	162	6.4		66	32	11	2.5	19.5	195	175
400	B1-B2-B3-B4	6	271	337	173	192	258	355	65	149	86	200	260	172	6.4		66	50	11	3	20	205	175

NFC and DIN - Direct operation


FUSERBLOC 25 to 32 A in frame size 0 / fuse size 10 x 38

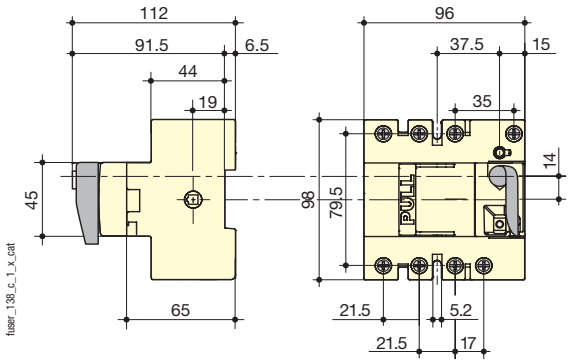

FUSERBLOC 32 A in frame size 0 / fuse size 14 x 51

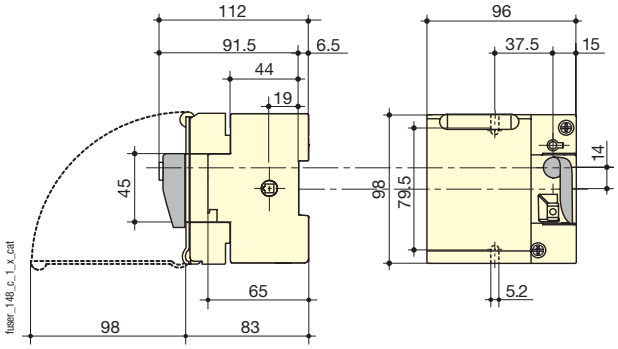

FUSERBLOC 50 to 400 A

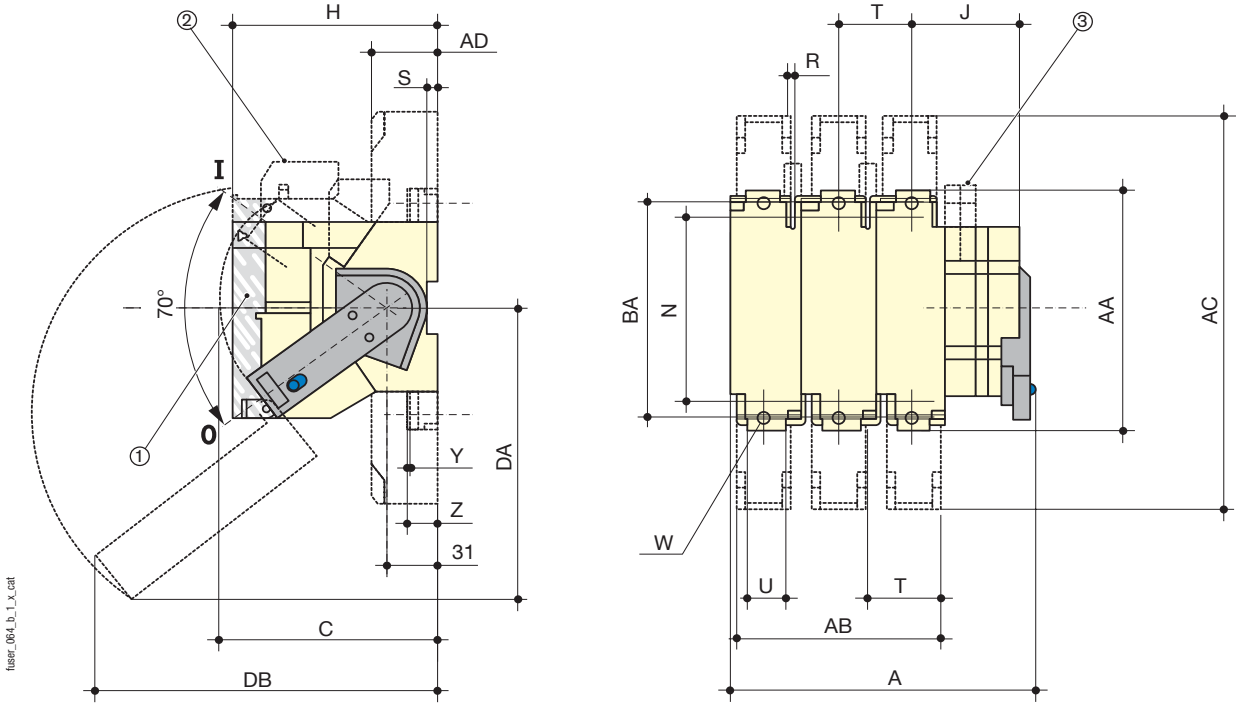


1. Protection screen lockable in position I
2. 1 or 2 fuse blown indication.
3. 1 or 2 A type ACs

Rating			Overall dimensions			Terminal shrouds				Switch body				Switch mounting			Connection						
(A)	Fuse size	Frame size	A 3p.	A 4p.	C	AB 3p.	AB 4p.	AC	AD	H	J	DA	DB	N	R	S	T	U	W	Y	Z	AA	BA
50	14 x 51	1	118	145	134					87	33.5			106	5.4	6.5	27					118	
63	00C	2	133	165	134					116.5	36	159	145	106	5.4	6.5	32					118	
100	22 x 58	3	150	186	173	108	144	268	44	116	38			127	5.4		36	20	8.5	2.5	19.5	162	141
125	22 x 58	3	150	186	173	108	144	268	44	116	38			127	5.4		36	20	8.5	2.5	19.5	162	141
125	00	3	150	186	173	108	144	268	44	126.5	38	141	193	127	5.4		36	20	8.5	2.5	19.5	162	141
160	00	3	150	186	173	108	144	268	44	126.5	38	141	189	127	5.4		36	20	8.5	2.5	19.5	162	141
160	0	4	192	242	173	136	172	268	44	136.5	45	174	229	140	5.4		50	20	8.5	2.5	19.5	162	141
250	1	5	253	313	173	180	240	345	65	146	81	185	251	162	6.4		60	32	11	2.5	19.5	195	166
400	2	6	271	337	173	192	258	355	65	149	86	200	260	172	6.4		66	50	11	3	20	205	175

Direct and external front or right side operation





BS88 - FUSERBLOC 630 A in fuse size C1-C2
FUSERBLOC 800 A in fuse size C1-C2-C3
NFC and DIN - FUSERBLOC 630 to 800 A in fuse size 3

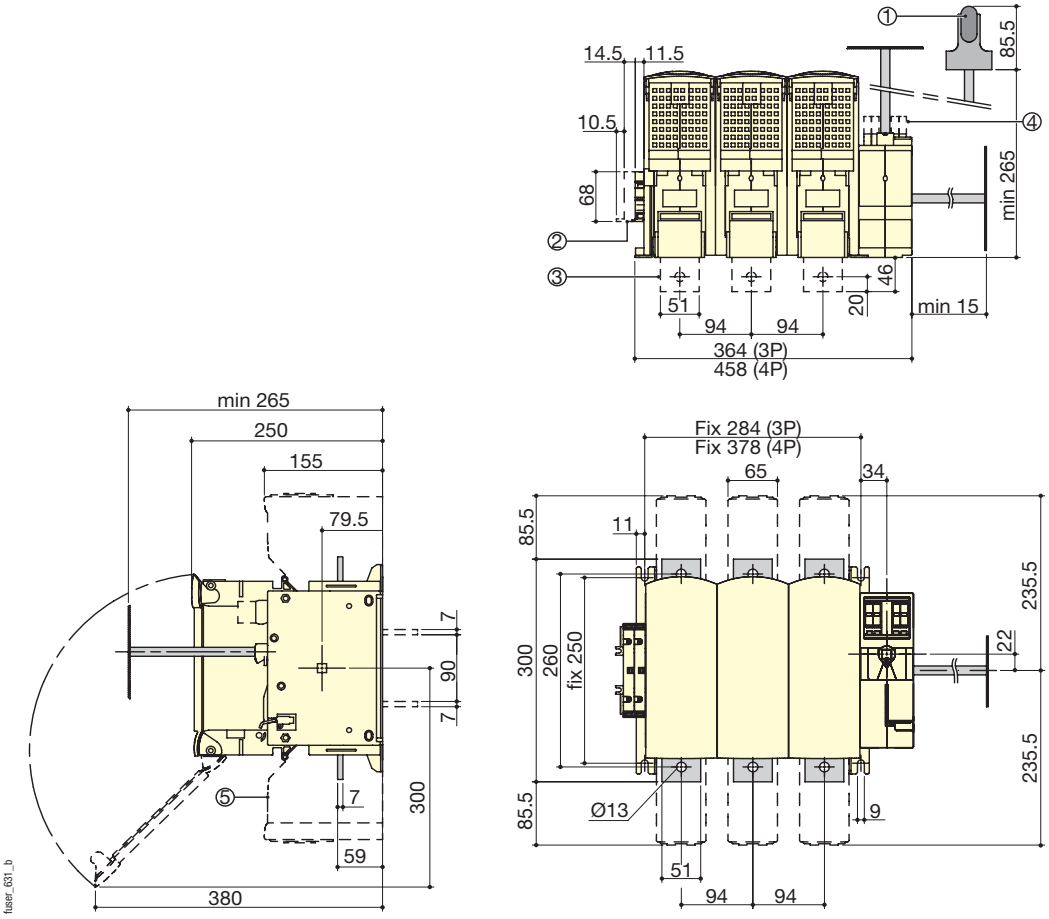

1. Direct operation
2. S type auxiliary contact NO + NC
3. Rear connection (option)
4. 1 to 8 pre-break auxiliary contact for signalisation
5. Terminal shrouds


➲ Dimensions for external handles


FUSERBLOC 630 to 800 A


Handle type	Front operation		Side operation	
	Direction of operation	Door drilling	Direction of operation	Door drilling
S3 type Box size 17				

BS88 - FUSERBLOC 1250 A in fuse size D1
NFC and DIN - FUSERBLOC 800 to 1250 A in fuse size 4

1. Direct operation
2. S type auxiliary contact NO + NC
3. Rear connection (option)
4. 1 to 8 pre-break auxiliary contact for signalisation
5. Terminal shrouds





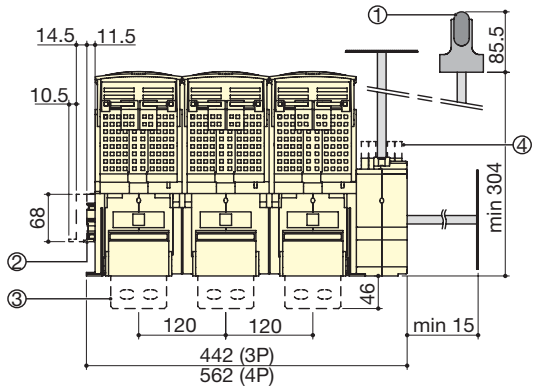


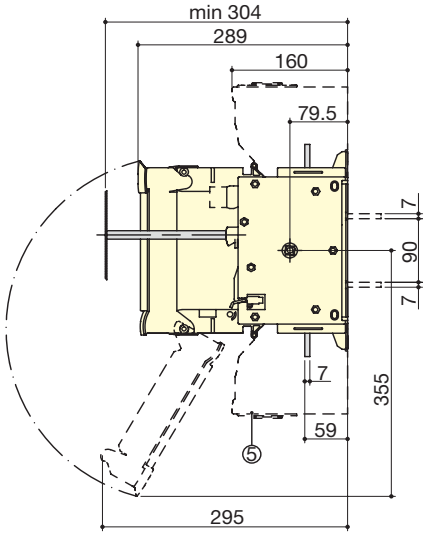

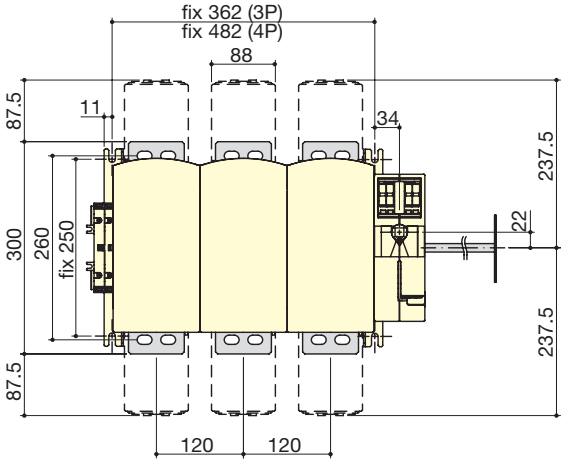

fuser_632_b

FUSERBLOC 800 to 1250 A

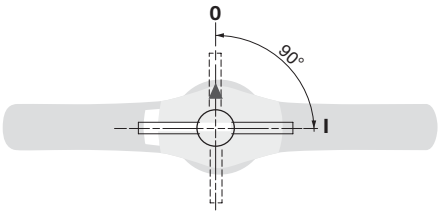Handle type	Front operation Direction of operation	Side operation Direction of operation	Door drilling
S3 type Box size 18 			
S4 type 			

fuser_715_a_1_gb_cat