Oil & fuel pipe stopper
ที่อุดท่อส่งน้ำมันและเชื้อเพลิง

FORCE ฟอร์ซ

- Use to plug steel lines once disconnected.
- Prevents fluid leaks and contamination during service.
- Use with any automotive fluid.
- Spring loaded design installs in seconds.
- Specifications: Banjo, 3/8", 5/16", 1/2"





KT Code	Model	Weight (g)	Price
F131-904G12	904G12	157	

Oxygen sensor socket
ลูกบ๊อกซ์สำหรับถอดใส่ Oxygen Sensor

FORCE ฟอร์ซ

- Applicable: FORD, TOYOTA, NISSAN, BENZ, BMW and most of European cars, also GM vehicles.
- Flare nut for vacuum switch & oxygen sensor service on the computer-controlled engines.
- Features: 3/8" of the double square DR. 7/8"(22mm) 12 point & 22mm 6 point.





KT Code	Model	Weight (g)	Price
F131-9G1403	9G1403	181	

Universal steel line stopper
ที่อุดท่อส่งน้ำมัน

FORCE ฟอร์ซ

- Suitable for clamping and sealing steel line on braking system, cooling system, fuel line, A/C line etc.
- Provides an effective seal to steel lines when disconnected.
- Prevents fluid loss and contamination in the work area.
- 5/16",3/8",1/2" and banjo(10.4mm&18mm)



KT Code	Model	Weight (g)	Price
F131-9G4301	9G4301	205	

Oxygen sensor rethread tool
ตัวล้างเกลียว Oxygen sensor

FORCE ฟอร์ซ

- Cleans threads in oxygen sensor holes.
- Use with 3/4" hex socket or 3/8" square drive.
- M18x1.5 also works on M18x1.5 spark plug threads.



KT Code	Model	Weight (g)	Price
F131-63007	63007	90	


7pc Sensor & sending unit socket set
ชุดลูกบ๊อกซ์สำหรับถอดใส่ Oxygen Sensor 7 ชิ้น

FORCE ฟอร์ซ

- Designed for removing oxygen sensor.

Content:

01-22mm (7/8") Heated oxygen sensor socket (1/2" DR. x 7/8" x 50mmL)
02-22mm (7/8") Low profile offset socket (3/8"DR. x 7/8" x 30mmL)
03-22mm (7/8") Oxygen sensor socket (3/8" DR.x 7/8"x 6pt.x 80mmL)
04-22mm (7/8") Universal vacuum Pvs, Tvs valve & oxygen sensor socket (3/8" DR.x 7/8"x 6pt.x 90mmL)
05-1" &1-1/16" Oil pressure sending socket (3/8" DR.x 1"x 1-1/16"x 74mmL)
06-1-3/16" Oil pressure sending socket (1/2" DR.x 29mm x 6pt. x 90mmL)

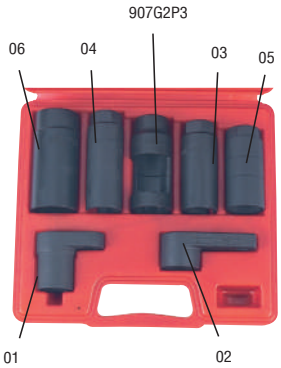

KT Code	Model	Weight (g)	Price
F131-907G2	907vG2	2140	

Crank seal remover & installer kit
ชุดเครื่องมือถอดและใส่ซีลข้อเหวี่ยง

FORCE ฟอร์ซ


- Allows the crank seal to be replaced without dismantling the crank case.
- Universal use covering a wide range of cars with oil seals between 27mm and 58mm in diameter.
- Use the existing bolt in the vehicle for installation.
- Screw-type adapter to t the centering.
- The blue seal adapters are made of aluminum to prevent the damage of crank.

Note:

Some cam seals have screws to prevent remove. Do not attempt to use this tool by power.







KT Code	Model	Weight (g)	Price
F131-920G1	920G1	1750	

G