Snap in tire valve installer
เหล็กดึงจุ๊ปเลส

ฟอร์ซ

Steel constructed tool with deep threaded head for positive sealing of all snap-in type passenger car tire valve stems.

9B0301



9B0302




KT Code	Model	Weight (g)	Price
F131-9B0301	9B0301	350	
F131-9B0302	9B0302	356	

4pc T-handle disclosed tire repair tool set
ชุดเครื่องมือปะยาง แบบแทงไส้ไหม

ฟอร์ซ

For steel belted redial tire. T-handle disclosed tire repair tool is for inserting plugging material typically in the form of rubber coated strands, into a tire puncture. The plugging material is threaded into the open eye of a needle forming a part of the tool and inserted into the puncture. The inserting motion is limited by a stop free to rotate on the needle's shank so that the ends of the strand are not drawn into the puncture and the stop also limits the withdrawal of the needle.

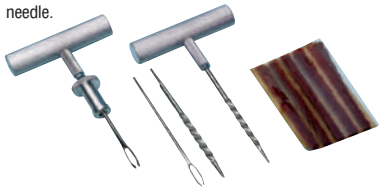

KT Code	Model	Weight (g)	Price
F131-904T4	904T4	354	

Dual check
หัวเติมลม

ฟอร์ซ

9T0402



9T0403



KT Code	Model	*l* Length	Weight (g)	Price
F131-9T0402	9T0402	6	75	
F131-9T0403	9T0403	12	140	

Roller stitcher
ลูกกลิ้งยาง

ฟอร์ซ

- Wood handle for light and portable.
- Bearing inside for easier using.



KT Code	Model	Weight (g)	Price
F131-9T0407	9T0407	123	

2pc Tire valve torque driver set
ไขควงขันวาวล์จุ๊ปเลส 2 ชิ้น

ฟอร์ซ

- Tools have internal torque limiting mechanism to prevent over- torquing of tire pressure monitoring system valve cores.
- A must for the tire pressure monitoring system valves to maintain proper tire pressure.
- Each tool is set for a specific maximum torque:
  Red-25 Ncm (2.2 IN. LB)
  Black-45 Ncm (4 IN. LB)

9U3201



9U3202



KT Code	Model	Weight (g)	Price
F131-902U3	902U3	120	

4WD Front wheel bearing tool
ชุดเครื่องมือถอดและใส่ลูกปืนล้อหน้า รถเก๋ง/กะบะ

ฟอร์ซ

- 21pc Bearing cup size:
  38, 50, 55, 59, 63.5, 66.5, 70.5, 71.5, 73, 73.5, 74.5, 76, 77.5, 81.5, 83.5, 86, 86, 88.5, 91, 102, 102mm
  1pc Nut
  1pc Screw
  1pc Washer







KT Code	Model	Weight (g)	Price
F131-924T1	924T1	10.5	

G