Littelfuse® | Carling Technologies®
A Littelfuse® Brand

V-Series

Sealed Rocker Switches

PRODUCT WEBPAGE

request sample, configure part, watch video





Contura® IP66/68 Snap-In Mounted Switches

These switches are a staple in the marine and transportation industries and have passed a range of environmental, corrosion, temperature, vibration, shock and sealing tests including MIL Std 202F, MIL Std 510.1, UL 1500, ISO 8846, IEC 60529 and BS 5490 among others, making them one of the most rugged and reliable switches ever manufactured.

1-2	.4-20	125-250	12-24
Poles	Amps	VAC	VDC

Typical Applications

- On/Off-Highway
- Marine
- Armoured Vehicles
- Mining Machinery
- Any Application Requiring Sealing Protection

Design Features

INTERCHANGEABLE ACTUATORS
Panel redesign is a snap with our wide range of rocker styles. Achieve maximum design variety with minimum inventory. Simply swap rockers to create an entirely new look for your panel.

DUAL SEAL PROTECTION
Seals out water, dust, debris, and sealed to IP66/68 for above-panel components

CLEAN CONNECTIONS
Options for both eight and ten terminal base styles with AMP & Packard compatible connectors affords myriad circuit options while providing ease of assembly.

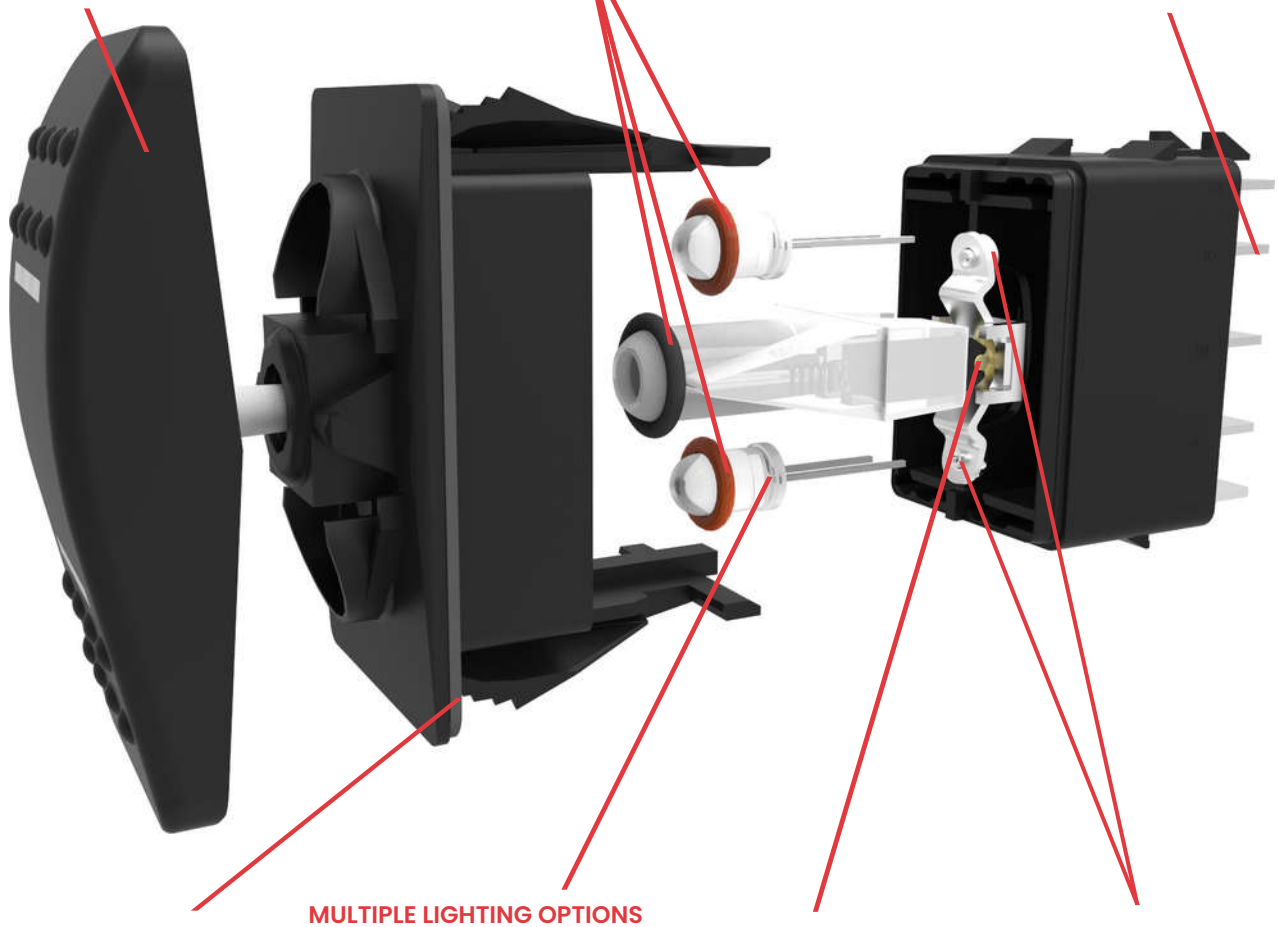

OPTIONAL PANEL SEAL
Helps prevent water/ dust ingress behind panel.

MULTIPLE LIGHTING OPTIONS
In addition to Incandescent lamps, our LED illumination is offered in a wide array of light intensities, colors, as well as dual level, tri-color, and flashing options.

BRASS ROLLER PIN
Robust mechanism eliminates the need for lubricants. Enables switch to withstand -40°C to +85°C temperatures.

SILVER PLATED BUTT CONTACT MECHANISM
Providing 50k to 100k electrical cycles, circuit and load dependent

Actuator Options & Accessories



Contura II & III

The Contura II & III actuators are constructed of thermoplastic polycarbonate and are offered with a hard nylon overlay or a "soft-touch" elastomer overlay. These models incorporate aesthetic designs on the top and bottom of the rocker featuring two rows of raised "bumps" on the Contura II and three "indented" lines on the Contura III.



Contura X

The raised bracket/bezel on the Contura X helps prevent debris from being trapped under the actuator. This curved rocker style is available with a variety of lenses and legends.



Contura IV

The Contura IV's "Shape to create a Shape" actuator works with the curves, contours & advanced styling of the latest panel designs, flowing with these advanced curves & radii. This actuator style fits on the Contura flush bracket/bezel.



Contura XI

The raised bracket/bezel on the Contura XI helps prevent debris from being trapped under the actuator. This convex style rocker is available with a wide variety of lenses and legends.



Contura V

The symmetrically curved Contura V actuator provides the perfect complement to the Contura IV's "Shape to create a Shape" design concept. With its flush style mounting bracket, Contura V can be mounted in between two Contura IV's, by itself, or in groups.



Contura XII

The Contura XII version features a paddle style actuator with the raised bracket/bezel of Contura X and XI. The contoured handle design provides intuitive recognition and ease of operation and is available with all Contura X and XI lens and legend offerings.



Contura VI (WAVE)

The Contura VI WAVE sealed rocker switches, when used in a row, create an uniquely appealing "wave" design on your panel. A variety of colors and finishes are available for both rocker and wave insert. Contura VI features bar and oval lenses.



Contura XIV

The Contura XIV represents a sleek new crossover rocker design which should appeal to Trucks, Buses and Heavy Vehicles as well as the Marine Industry. Intuitive feel is provided by recessed ridges along with a Center Groove which effectively defines the boundary between top and bottom switch functions.



Contura VII

Contura VII featuring gently curved corners and edges assuring compatibility with most any panel design. Intuitive feel is maximized by the use of 2 embossed circular pads located at opposite ends of the rocker. Any combination of Bar or Oval style lenses can be located in the pads providing a truly unique look, exclusive to Contura VII.



Illuminated Indicators & Accessories

Alert operator of systems functions or malfunctions, are offered with removable/ replaceable lamps in Contura II, II, V or X styles. Accessories include connectors, mounting panels, hole plugs, panel seals, and actuator removal tools. Refer to accessories page for full details

Tech Specs

Electrical

Contact Rating	4VA @ 24VDC (MAX) resistive 15 amps, 125VAC 10 amps, 250VAC 1/2 HP 125-250VAC 20 amps, 4-14VDC 15 amps, 15-28VDC 10A, 14VT 6A, 125VAC L
Dielectric Strength	1500 Volts RMS
Insulation Resistance	50 Megohms
Initial Contact Resistance	10 milliohms max. @ 4VDC
Life	Up to 100,000 cycles, circuit and load dependent
Contacts	Silver alloy, silver tin-oxide, fine silver
Terminals	Brass or copper/silver plate 1/4" (6.3mm) Quick Connect terminations standard. Solder lug, Wire Lead

Physical

Lighted	Incandescent - rated 10,000 hours Neon - rated 25,000 hours LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24VDC)
Seals	Internal Optional external gasket panel seal
Base	Polyester blend rated to 125°C with a UL flammability rating of 94V0.
Contura II, III, IV, V, VI, VII Actuator	**Hard Surface**: Basic actuator structure molded of thermoplastic polycarbonate with a hard Nylon 66 thermoplastic surface overlay. **Soft Surface**: Basic actuator structure molded of thermoplastic polycarbonate with an elastomer overlay.
Contura X, XI, XII Actuator, VP	Nylon 66 Reinforced rated to 105°C
Lens	Polycarbonate rated at 100°C
Contura XIV	Polycarbonate lens/sub-rocker with ABS shell

Actuator Travel (Angular Displacement)

2 position	18°
3 positions	9° from center

Environmental

Sealing	IP66/68, for above-panel components of actual switch only.
Corrosion	Mixed Flowing Gas (MFG) Class III 3 year accelerated exposure per ASTM B-827, B-845 Silver and gold contacts
Operating Temp	-40°C to +85°C
Vibration 1	Per Mil-Std 202F, Method 204D Test Condition A 0.06 DA or 10G's 10-500 Hz. Tested with VCH connector. Test criteria - No loss of circuit during test, pre and post test contact esistance.
Vibration 2	Resonance search24-50 Hz 0.40 DA50-2000 Hz ±10 G's peak Horizontal Axis 3-5 G's max. Random 24 Hz 0.06 PSD-Gsq/Hz 60 Hz 0.50 100 Hz 0.50 200 Hz 0.025 2000 Hz 0.025 No loss of circuit during test; <10µ seconds chatter.
Shock	Per Mil-Std 202F, Method 213B, Test Condition K @ 30G's. Tested with VCH connector. Test criteria - No loss of circuit during test, pre and post test contact resistance.
Salt Spray	Per Mil-Std 202F, Method 101D, Test Condition A, 96 Hrs. Sealed version only.
Dust	Mil STD 810, Method 510.2 Air Velocity 300 Ft/Min Duration 16Hr
Thermal Shock	Per Mil-Std 202F, Method 107F, Test Cond. A, -55°C to +85°C. Test criteria -pre and post test contact resistance
Moisture Resistance	Per Mil-Std 202F, Method 106F, Test Criteria - pre and post test contact resistance
Ignition Protection	All Contura switches with sealed construction meet the requirements of UL1500/ISO8846 for ignition protection, in addition to conformance with EC directive 94/25/EC for marine products.

Mounting Specifications

Panel Thickness Range

Gaskets	Acceptable Panel Thickness
0	.030 to .250 (.76 to 6.35mm)
1	.030 to .109 & .147 to .157 (.76 to 2.77mm & 3.73 to 3.98mm)

Recommended: No gasket with panel thickness of .032, .062, .093, .125,.187 or .250



*Manufacturer reserves the right to change product specification without prior notice.

Ordering Scheme

Contura II & III

Sample Part Number	V	1	D	A	B	T	0	B	-	A	R	B	00	-	0	00
Selection	1	2	3	4	5	6	7	8		9	10	11	12		13	14

1. SERIES

V V-Series

2. CIRCUIT

Terminal Connections as viewed ( ) - momentary
from bottom of switch: SP - single pole: terminals 1, 2 & 3.

8 terminal	**10 terminal**
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10- - 9

DP - double pole: terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		**1**	**2**	**3**
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
2	**B**	(ON)	NONE	OFF
3	**C**	ON	NONE	(OFF)
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3. RATING 3

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4. TERMINATION / BASE STYLE

8 term	**10 Term**	**Termination**	**Jumper**
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**4**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5. ILLUMINATION

Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6,7. LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright	**8** 24V
LED*	**Red**	**Amber**	**Green**	**Red**	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8. FLUSH BRACKET COLOR, PANEL SEAL 1

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9. ACTUATOR

0	No Actuator
A, B	Contura II
C, D	Contura III



Actuator thick end over terminals: 1,4 3,6

10. LENS 1

0 - No Actuator **Z** - No Lens

Clear	White	Amber	Green	Red	Blue
1	**6**	**8**	**G**	**M**	**T**
2	**7**	**C**	**H**	**N**	**U**
3	**8**	**D**	**J**	**P**	**V**

Square lens options only available for Contura II.

4	**9**	**E**	**K**	**R**	**W**
5	**A**	**F**	**L**	**S**	**Y**



Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11. ACTUATOR COLOR AND TEXTURE 1

0 - No Actuator

	Black	Gray	Red	White
Soft Surface	**B**	**G**	**R**	**W**
Hard Surface	**C**	**H**	**S**	**Y**

12. ACTUATOR LENS OR BODY LEGENDS 2

11 ON / OFF **12** OFF / ON **13** I / O **14** O / I

15 O O / F N / F **16** O O / N F / F **17** O I **18** I O



For additional legend options & codes, visit us at www.carlingtech.com

13. LEGENDS ORIENTATION

0	No legend (used with codes 11-18 in selection 12)
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4





1 **2** **3** **4**

14. ACTUATOR LENS LEGENDS

00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 Body legends not available on Soft surface actuators; White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Additional ratings available. See V-Series Switch Accessories page.
4 Contura II available with two square lenses. Consult factory for details.

Configure Complete Part Number > | Browse Standard Parts >

Ordering Scheme

Contura II & III locking

Sample Part Number	V	1	D	A	S	W	0	B	-	A	Z	E	00	-	0
Selection	1	2	3	4	5	6	7	8		9	10	11	12		13

1. SERIES

V V-Series

2. CIRCUIT

Terminal Connections as viewed ( ) - momentary
from bottom of switch: SP - single pole: terminals 1, 2 & 3.
DP - double pole: terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10- - 9

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
4	**D**	ON	NONE	ON
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
9	**N**	OFF	NONE	ON
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3. RATING 4

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4. TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**4**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5. ILLUMINATION & SWITCH SEALING

3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
C	**3**	2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
M	**R**	1	UP	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6. LOCK

Lock above terminals 1 & 4 end of switch
W lock

7. LAMP

Lamp above terminals 3 & 6 end of switch

No lamp	0				
Neon	1 **125VAC**	2 **250VAC**			
Incandescent	4 **3V**	5 **6V**	6 **12V** superbright	7 **18V** superbright	8 **24V**
LED*	**Red**	**Amber**	**Green**	**Red**	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8. FLUSH BRACKET COLOR, PANEL SEAL 1

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9. HARD SURFACE ACTUATOR 1

	Black	Gray	Red	White
Contura II	**A**	**B**	**G**	**H**
Contura III	**C**	**D**	**E**	**F**

Actuator orientation above terminals:



10. LENS

Z - No Lens

Clear	White	Amber	Green	Red	Blue
3	**8**	**D**	**J**	**P**	**V**



Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11. ACTUATOR LOCK FUNCTION AND COLOR 1

Lock Color Match Actuator	Up	Down	Up & Down	Center 3
Black	**A**	**H**	**R**	**1**
White	**B**	**J**	**S**	**2**
Red	**C**	**K**	**T**	**3**
Safety Orange	**D**	**L**	**V**	**4**
	E	**M**	**W**	**5**

12. ACTUATOR LENS OR BODY LEGENDS 2

00 - No Legend

21 OFF **22** **23** ON O **24** I

25 O F F **26** O N **27** O **28** I



For additional legend options & codes, visit us at www.carlingtech.com

13. LEGEND ORIENTATION

0	No legend (used with codes 21-28 in selection 12)
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



Notes: Consult factory to verify horsepower rating for your particular circuit choice.

1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Only available with 3 position circuits. Center OFF and special circuits only available with center position lock function.
4 Additional ratings available. See V-Series Switch Accessories page.

Configure Complete Part Number > | Browse Standard Parts >

Ordering Scheme

Contura IV

Sample Part Number	V	1	D	A	B	T	0	B	-	E	P	C	00	-	0	00
Selection	1	2	3	4	5	6	7	8		9	10	11	12		13	14

1. SERIES

V V-Series

2. CIRCUIT

Terminal Connections as viewed ( ) - momentary
from bottom of switch: SP - single pole: terminals 1, 2 & 3.
DP - double pole: terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
2	**B**	(ON)	NONE	OFF
3	**C**	ON	NONE	(OFF)
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3. RATING [4]

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT, (circuit 1, 4 , A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4. TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**4**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5. ILLUMINATION & SWITCH SEALING

Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6,7. LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright	**8** 24V
LED*	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**		**R**
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8. FLUSH BRACKET COLOR, PANEL SEAL [1]

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9. ACTUATOR

E	Contura IV, left orientation
T	Contura IV, left orientation, laser etched
F	Contura IV, right orientation
R	Contura IV, right orientation, laser etched

Actuator orientation over terminals:



10. LENS

0 - No Actuator **Z** - No Lens

Clear	White	Amber	Green	Red	Blue
1	**6**	**8**	**G**	**M**	**T**
2	**7**	**C**	**H**	**N**	**U**
3	**8**	**D**	**J**	**P**	**V**
4	**9**	**E**	**K**	**R**	**W**
5	**A**	**F**	**L**	**S**	**Y**



Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11. ACTUATOR COLOR [1, 5, 6]

No Actuator	**0**	Black	**C**	Gray	**H**	Red	**S**
White	**Y**	Nickel	**D**	Pewter	**E**		

12. ACTUATOR LENS OR BODY LEGENDS [2]

11 ON / OFF **12** OFF / ON **13** I / O **14** O / I

15 O O / F N F **16** O O / N F F **17** O I **18** I O



For additional legend options & codes, visit us at www.carlingtech.com

13. LEGENDS ORIENTTATION

0	No legend (used with codes 11-18 in selection 12)
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



13. ACTUATOR LENS LEGENDS

00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Gloss brow is on left side of E actuator and right side of F actuator.
4 Additional ratings available. See V-Series Switch Accessories page.
5 Laser etched rocker only available with lens code Z & actuator colors black, nickel or pewter.
6 Pewter and nickel colors only available with laser etched actuator.

Configure Complete Part Number > | Browse Standard Parts >

Ordering Scheme

Contura V

Sample Part Number	V	1	D	A	B	T	0	B	-	G	P	C	00	-	0	00
Selection	1	2	3	4	5	6	7	8		9	10	11	12		13	14

1. SERIES

V V-Series

2. CIRCUIT

Terminal Connections as viewed ( ) - momentary
from bottom of switch: SP - single pole: terminals 1, 2 & 3.
DP - double pole: terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	A	ON	NONE	OFF
2	B	(ON)	NONE	OFF
3	C	ON	NONE	(OFF)
4	D	ON	NONE	ON
5	F	ON	NONE	(ON)
6	J	ON	OFF	ON
7	K	ON	OFF	(ON)
8	L	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3. RATING 4

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4. TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**4**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5. ILLUMINATION & SWITCH SEALING

Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6,7. LAMP

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V	**7** 18V	**8** 24V
LED*			superbright	superbright	
	Red	**Amber**	**Green**	**Red**	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8. FLUSH BRACKET COLOR, PANEL SEAL 1

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9. ACTUATOR

0	No Actuator
G	Contura V
P	Contura V, laser etched

10. LENS

0 - No Actuator **Z** - No Lens style & location: #1 / #2

Clear	White	Amber	Green	Red	Blue	
1	**6**	**8**	**G**	**M**	**T**	
2	**7**	**C**	**H**	**N**	**U**	
3	**8**	**D**	**J**	**P**	**V**	
4	**9**	**E**	**K**	**R**	**W**	
5	**A**	**F**	**L**	**S**	**Y**	

Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.

11. ACTUATOR COLOR 1, 3, 5

No Actuator	**0**	Black	**C**	Gray	**H**	Red	**S**
White	**Y**	Nickel	**D**	Pewter	**E**		

12. ACTUATOR LENS OR BODY LEGENDS 2, 6

11	ON OFF	**12**	OFF ON	**13**	I O	**14**	O I
15	O O F N F	**16**	O O N F F	**17**	O I	**18**	I O

For additional legend options & codes, visit us at www.carlingtech.com

12. LEGENDS ORIENTATION

0	No legend (used with codes 11-18 in selection 12)
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4

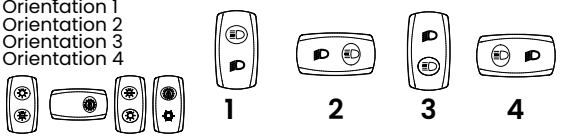

13. ACTUATOR LENS LEGEND

00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Laser Etched rocker only available with lens code Z & actuator colors black, nickel or pewter.
4 Additional ratings available. See V-Series Switch Accessories page.
5 Nickel and Pewter colors only available with laser etched actuator.
6 Consult factory for laser etched lens callout.

Configure Complete Part Number > | Browse Standard Parts >

Ordering Scheme

Contura IV & V Locking

Sample Part Number	V	1	D	A	S	W	0	B	-	J	Z	E	00	-	0
Selection	1	2	3	4	5	6	7	8		9	10	11	12		13

1. SERIES

V V-Series

2. CIRCUIT [3]

Terminal Connections as viewed ( ) - momentary
from bottom of switch: SP - single pole: terminals 1, 2 & 3.
DP - double pole: terminals 1, 2, 3, 4, 5 & 6.

8 terminal
8 - - 7
1 - - 4
2 - - 5
3 - - 6

10 terminal
8 - - 7
1 - - 4
2 - - 5
3 - - 6
10- - 9

Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
4	**D**	ON	NONE	ON
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
9	**N**	OFF	NONE	ON

3. RATING [4]

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4. TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**4**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5. ILLUMINATION & SWITCH SEALING

Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
C	**3**	2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
M	**R**	1	UP	3 (+) 6 (–)

6. LOCK

Lock above terminals 1 & 4 end of switch.

W low profile lock
Y [6] high profile lock

Notes: Consult factory to verify horsepower rating for your particular circuit choice.

1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Only available with 3 position circuits. Center OFF and special circuits only available with center position lock function.
4 Additional ratings available. See V-Series Switch Accessories page.
5 Located at T3-6 end of switch.
6 Contura V style only.

Configure Complete Part Number >

Browse Standard Parts >

7. LAMP

Lamp above terminals 3 & 6 end of switch

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V	**7** 18V superbright	**8** 24V superbright
LED*	**Red**	**Amber**	**Green**	**Red**	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8. FLUSH BRACKET COLOR, PANEL SEAL [1]

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9. HARD SURFACE ACTUATOR

CONTURA IV:	Black	Gray	Red	White
Orientation				
Left	**J**	**K**	**L**	**M**
Right	**N**	**P**	**R**	**S**



Actuator orientation over terminals: 3,6 1,4

CONTURA V:	Black	Gray	Red	White
	U	**V**	**W**	**Y**



Actuator orientation over terminals: 3,6 1,4

10. LENS [5]

Z - No Lens

Clear	White	Amber	Green	Red	Blue	
A	**B**	**C**	**D**	**E**	**F**	bar lens
G	**H**	**J**	**K**	**L**	**M**	oval lens

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11. ACTUATOR LOCK FUNCTION AND COLOR [1]

Lock Color	Up	Down	Up & Down	Center [3]
Match Actuator	**A**	**H**	**R**	**1**
Black	**B**	**J**	**S**	**2**
White	**C**	**K**	**T**	**3**
Red	**D**	**L**	**V**	**4**
Safety Orange	**E**	**M**	**W**	**5**
Gray	**F**	**G**	**N**	**6**

12. ACTUATOR LENS OR BODY LEGENDS [2]

00 - No Legend

21 OFF **22** ON **23** O **24** I

25 O F F **26** O N **27** O **28** I



For additional legend options & codes, visit us at www.carlingtech.com

13. LEGENDS ORIENTTATION

0	No legend
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



Ordering Scheme

Contura VI Wave

Sample Part Number	V	1	D	B	G	N	T	B	-	H	A	7	C	B	-	AC	1	00
Selection	1	2	3	4	5	6	7	8		9	10	11	12	13		14	15	16

1. SERIES

V V-Series

2. CIRCUIT

Terminal Connections as viewed ( ) - momentary
from bottom of switch: SP - single pole: terminals 1, 2 & 3.

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

DP - double pole: terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	A	ON	NONE	OFF
2	B	(ON)	NONE	OFF
3	C	ON	NONE	(OFF)
4	D	ON	NONE	ON
5	F	ON	NONE	(ON)
6	J	ON	OFF	ON
7	K	ON	OFF	(ON)
8	L	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified inselection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3. RATING 3

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4. TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**4**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5. ILLUMINATION & SWITCH SEALING

Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)

6,7. LAMP

Lamp above terminals 3 & 6 end of switch

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V	**7** 18V	**8** 24V
LED*			superbright	superbright	
	Red	**Amber**	**Green**	**Red**	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8. FLUSH BRACKET COLOR, PANEL SEAL 1

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9. ACTUATOR

0 No Actuator **H** High Insert  **L** Low Insert 

10,11. LENS

0 - No Actuator **Z** - No Lens

Clear	White	Amber	Green	Red	Blue	
–	**7**	**C**	**H**	**N**	**U**	Bar Lens Translucent
3	–	**D**	**J**	**P**	**V**	Bar Lens Transparent
4	–	**E**	**K**	**R**	**W**	Oval Lens Transparent
–	**A**	**F**	**L**	**S**	**Y**	Oval Lens Translucent

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

12. ACTUATOR COLOR

C Black **H** Gray **S** Red **Y** White

13. INSERT COLOR

B	Black
C	Bright Chrome Plated
D	Satin Chrome Painted
N	Bright Nickel Plated
S	Satin Chrome Plated
T	Satin Nickel Plated
W	White

14. ACTUATOR LENS OR BODY LEGEND 2

00 - No Legend this location/No actuator

11 ON / OFF **12** OFF / ON **13** I / O **14** O / I

15 O O / F N / F **16** O O / N F / F **17** O I **18** I O



For additional legend options & codes, visit us at www.carlingtech.com

15. ACTUATOR ORIENTATION

0	No legend (used with codes 11-18 in selection 12)
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4

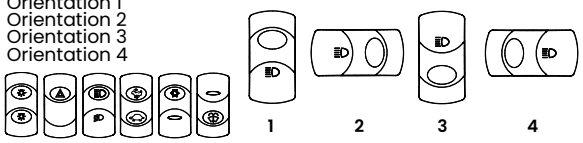

16. ACTUATOR LENS LEGEND

00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes: Consult factory to verify horsepower rating for your particular circuit choice.

1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators. Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Additional ratings available. See V-Series Switch Accessories page.

Configure Complete Part Number > Browse Standard Parts >

Ordering Scheme

Contura VII

Sample Part Number	V	1	D	A	B	T	0	B	-	Z	R	C	00	-	0	00
Selection	1	2	3	4	5	6	7	8		9	10	11	12		13	14

1. SERIES

V V-Series

2. CIRCUIT

Terminal Connections as viewed ( ) - momentary
from bottom of switch: SP - single pole: terminals 1, 2 & 3.
DP - double pole: terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
2	**B**	(ON)	NONE	OFF
3	**C**	ON	NONE	(OFF)
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3. RATING 4

1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4. TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**4**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5. ILLUMINATION & SWITCH SEALING

Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
	0	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6,7. LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V	**7** 18V	**8** 24V
LED*			superbright	superbright	
	Red	**Amber**	**Green**	**Red**	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8. FLUSH BRACKET COLOR, PANEL SEAL 1

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9. ACTUATOR

0 No Actuator
Z Contura VII
Actuator orientation over terminals: 3,6 1,4



10. LENS

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.
0 - No Actuator **Z** - No Lens

White	Amber	Green	Red	Blue	Lens style & location
6	**B**	**G**	**M**	**T**	
7	**C**	**H**	**N**	**U**	
8	**D**	**J**	**P**	**V**	
9	**E**	**K**	**R**	**W**	
A	**F**	**L**	**S**	**Y**	
1	**2**	**3**	**4**	**5**	



11. ACTUATOR COLOR/ THUMB PRINT COLOR 1

O	N/A - No Actuator	**C**	Black/Black
H	Grey/Black	**S**	Red/Black
Y	White/Black		

12. ACTUATOR LENS OR BODY LEGENDS 2

11	ON OFF	**12**	OFF ON	**13**	I O	**14**	O I
15	O O F N F	**16**	O O N F F	**17**	O I	**18**	I O



For additional legend options & codes, visit us at www.carlingtech.com

13. ACTUATOR LENS OR BODY LEGENDS

0 No legend (used with codes 11-18 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4



16. ACTUATOR LENS LEGEND

00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators. Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Additional ratings available. See V-Series Switch Accessories page.
4 Legends available for lighted oval lens version only

Configure Complete Part Number > | Browse Standard Parts >

Ordering Scheme

Contura X, XI & XII

Sample Part Number	V	1	D	A	B	6	0	1	-	6	P	Z	00	-	0	00
Selection	1	2	3	4	5	6	7	8		9	10	11	12		13	14

1. SERIES

V V-Series

2. CIRCUIT

Terminal Connections as viewed ( ) - momentary
from bottom of switch: SP - single pole: terminals 1, 2 & 3.
DP - double pole: terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

Position:	1	2	3
SP DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1 A	ON	NONE	OFF
2 B	(ON)	NONE	OFF
3 C	ON	NONE	(OFF)
4 D	ON	NONE	ON
5 F	ON	NONE	(ON)
6 J	ON	OFF	ON
7 K	ON	OFF	(ON)
8 L	(ON)	OFF	(ON)
SPECIAL CIRCUITS			
H*	2 & 3	2 & 3, 5 & 4	5 & 4
G*	2 & 3, 5 & 6	2 & 3	OFF
S*	2 & 3, 5 & 6	2 & 3	1 & 2
M*	(2 & 3, 5 & 6)	2 & 3	OFF
R*	(2 & 3, 5 & 6)	2 & 3	2 & 1
E*	5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3. RATING 4

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4. TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**4**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5. ILLUMINATION & SWITCH SEALING

Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminal
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6,7. LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright	**8** 24V
LED*	**Red**	**Amber**	**Green**	**Red**	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

*Consult factory for "daylight bright" LED. Typical current draw for LED is 20ma

8. FLUSH BRACKET COLOR, PANEL SEAL 1

X & XI with Flush Bracket			X, XI, XII with Raised Bracket		
# of gaskets	**0**	**1**	**2**	**0**	**1**
Black	**B**	**C**	**D**	**1**	**4**
White	**W**	**Y**	**Z**	**2**	**5**
Gray	**G**	**H**	**J**	**3**	**6**

9. ACTUATOR

	0				
	Black	Gray	White	Red	
Contura X	**1**	**2**	**3**	**4**	
Contura XI	**6**	**7**	**8**	**9**	
Contura XII	**J**	**K**	**N**	**M**	
Actuator orientation over terminals:					3,6 1,4

10. LENS -ABOVE LAMP #1 TERMINALS 1,4
11. LENS - ABOVE LAMP #2 TERMINALS 3,6

0 - No Actuator **Z** - No Lens

Clear	White	Amber	Green	Red	Blue	Lens Style
3	**8**	**D**	**J**	**P**	**V**	Bar
4	**9**	**E**	**K**	**R**	**W**	One piece Square
5	**A**	**F**	**L**	**S**	**Y**	Two piece Square* (With clear top protective lens)
2	**7**	**C**	**H**	**N**	**U**	Two piece Square* (With smoke top protective lens)
1	**6**	**B**	**G**	**M**	**T**	Two piece Square* (With white top protective lens)

* All bottom lenses are molded of opaque material. Consult factory for other lens colors. Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

12. ACTUATOR LENS OR BODY LEGENDS 2

00 - No Legend this location / No actuator

11 ON OFF **12** OFF ON **13** I O **14** O I

15 O O F N F **16** O O N F F **17** O I **18** I O

21 OFF **22** ON **23** O **24** I

25 O F F **26** O N **27** O **28** I



For additional legend options & codes, visit us at www.carlingtech.com

13. ACTUATOR LENS OR BODY LEGENDS (3)

0 No legend (used with codes 11-18 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4



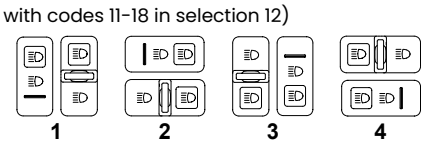

16. ACTUATOR LENS LEGEND

00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes: Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red & gray actuators. Custom colors are available, consult factory.
3 With 2 square lenses, use selection 12 for lens above lamp 1, & selection 14 for lens above lamp 2.
4 Additional ratings available. See V-Series Switch Accessories page.
5 Not available with Contura XI rockers.

Configure Complete Part Number > Browse Standard Parts >

Ordering Scheme

Contura X locking

Sample Part Number	V	1	D	A	S	W	0	1	-	1	P	B	00	-	0
Selection	1	2	3	4	5	6	7	8		9	10	11	12		13

1. SERIES

V V-Series

2. CIRCUIT

Terminal Connections as viewed ( ) - momentary
from bottom of switch: SP - single pole: terminals 1, 2 & 3.
DP - double pole: terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10- - 9

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
4	**D**	ON	NONE	ON
6	**J**	ON	OFF	ON
9	**N**	OFF	NONE	ON
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3. RATING 4

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4. TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**4**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5. ILLUMINATION & SWITCH SEALING

Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
C	**3**	2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
M	**R**	1	UP	3 (+) 6 (–)

6. LOCKS

Lock above terminals 1 & 4 end of switch.
W Lock

Notes: Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators; Custom colors are available, consult factory.
3 Located over T1-4 end of switch.
4 Additional ratings available. See V-Series Switch Accessories page.
5 Located over T3-6 end of switch.

6,7. LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright	**8** 24V
LED*	**Red**	**Amber**	**Green**	**Red**	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8. FLUSH BRACKET COLOR, PANEL SEAL 1

	Black	White	Gray
No Gasket	**1**	**2**	**3**
One Gasket	**4**	**5**	**6**

9. HARD SURFACE ACTUATOR

Contura X	Black	Gray	Red	White
	1	**2**	**3**	**4**

Actuator orientation over terminals:



10. LENS - ABOVE LAMP #2 TERMINALS 5

Z - No Lens

Clear	White	Amber	Green	Red	Blue	Lens Style
3	**8**	**D**	**J**	**P**	**V**	Bar
4	**9**	**E**	**K**	**R**	**W**	One piece Square
5	**A**	**F**	**L**	**S**	**Y**	Two piece Square* (with clear top protective lens)
2	**7**	**C**	**H**	**N**	**U**	Two piece Square* (with smoke top protective lens)
1	**6**	**B**	**G**	**M**	**T**	Two piece Square* (with white top protective lens)

* All bottom lenses are molded of opaque material. Consult factory for other lens colors. Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

12. ACTUATOR LOCK FUNCTION 3

Lock Color Match Actuator	Up	Down	Up & Down
Black	**A**	**H**	**R**
White	**B**	**J**	**S**
Red	**C**	**K**	**T**
Gray	**D**	**L**	**V**
Safety Orange	**E**	**M**	**W**
	F	**N**	**Y**

13. ACTUATOR LENS OR BODY LEGENDS 2

00 - No Legend

21 OFF **22** ON **23** O **24** I

25 O F F **26** O N **27** O **28** I



For additional legend options & codes, visit us at www.carlingtech.com

14. LEGEND ORIENTATION 3

0	No legend (used with codes 11-18 in selection 12)
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



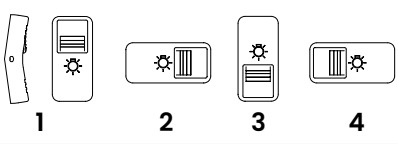

Configure Complete Part Number > | Browse Standard Parts >

Ordering Scheme

Contura XIV

Sample Part Number	V	1	D	B	B	C	0	B	-	FA	P	C	AB	-	1	00
Selection	1	2	3	4	5	6	7	8		9	10	11	12		13	14

1. SERIES

V V-Series

2. CIRCUIT

Terminal Connections as viewed ( ) - momentary
from bottom of switch: SP - single pole: terminals 1, 2 & 3.
DP - double pole: terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	A	ON	NONE	OFF
2	B	(ON)	NONE	OFF
3	C	ON	NONE	(OFF)
4	D	ON	NONE	ON
5	F	ON	NONE	(ON)
6	J	ON	OFF	ON
7	K	ON	OFF	(ON)
8	L	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1
S*		2 & 3, 5 & 6	2 & 3	1 & 2

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3. RATING 3

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F	10A 14V, 6A 14VT (circuit G only)

4. TERMINATION / BASE STYLE

8 Term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**4**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5. ILLUMINATION & SWITCH SEALING

Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

	Lamps	Illumination Type	Lamp wired to Terminals
S	NONE	–	–
A	1	INDEPENDENT	8 (+) 7 (–)
B	1	DOWN	3 (+) 7 (–)
C	2	UP	3 (+) 7 (–)
D	1	DOWN	3 (+) 7 (–)
	2	DOWN	1 (+) 7 (–)
E	1	UP	1 (+) 7 (–)
	2	UP	3 (+) 7 (–)
F	1	INDEPENDENT	8 (+) 7 (–)
	2	UP	3 (+) 6 (–)
G	1	INDEPENDENT	8 (+) 7 (–)
	2	UP	3 (+) 7 (–)
H	2	INDEPENDENT	8 (+) 7 (–)
SINGLE POLE SWITCHES ONLY			
J	1	DOWN	3 (+) 8 (–)
	2	INDEPENDENT	6 (+) 7 (–)
K	1	INDEPENDENT	8 (+) 7 (–)
	2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY			
L	1	DOWN	3 (+) 6 (–)
M	1	UP	3 (+) 6 (–)
N	1	DOWN	3 (+) 6 (–)
	2	DOWN	1 (+) 4 (–)
P	1	UP	1 (+) 4 (–)
	2	UP	3 (+) 6 (–)
U	1	INDEPENDENT	8 (+) 7 (–)
	2	INDEPENDENT	10 (+) 9 (–)

6 & 7. LAMP

No lamp	**0**				
Neon	**1** 125VAC	2 250VAC			
Incandescent 24V	**4** 3V	**5** 6V	**6** 12V	**7** 18V	**8**
LED*	**Red**	**Amber**	superbright **Green**	superbright **Red**	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8. BRACKET COLOR & PANEL SEAL

Color	No Gasket	1 Gasket	2 Gasket
Black	**B**	**C**	**D**
Gray	**G**	**H**	**J**
White	**W**	**Y**	**Z**

9. ACTUATOR STYLE

0	No Actuator - Furnished separately
FA	Contura XIV
FB	Contura XIV - Laser Etched



10. LENS COLOR / STYLE

0 - No Actuator **Z** - No Lens

Clear	White	Amber	Green	Red	Blue	
1	**6**	**B**	**G**	**M**	**T**	
2	**7**	**C**	**H**	**N**	**U**	
3	**8**	**D**	**J**	**P**	**V**	
4	**9**	**E**	**K**	**R**	**W**	
5	**A**	**F**	**L**	**S**	**Y**	
5	**A**	**N/A**	**N/A**	**N/A**	**N/A**	Laser-Etched Actuator

Only Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.

11. ACTUATOR COLOR 1

O	N/A - No Actuator
C	Black
S	Red
Y	White

12. ACTUATOR LENS OR BODY LEGEND 2

00 - No Legend this location / No actuator

11 ON / OFF **12** OFF / ON **13** I / O **14** O / I



15 O O F N F **16** O O N F F **17** O I **18** I O



12. ACTUATOR LENS OR BODY LEGEND

0	No legend
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



12. ACTUATOR LENS OR BODY LEGEND

00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes: Consult factory to verify horsepower rating for your particular circuit choice.

1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators.
3 Additional ratings available. See V-Series Switch Accessories page.

Configure Complete Part Number > | Browse Standard Parts >

Ordering Scheme

Contura XIV Locking

Sample Part Number	V	1	D	A	B	W	0	B	-	FC	Z	B	00	-	0
Selection	1	2	3	4	5	6	7	8		9	10	11	12		13

1. SERIES

V V-Series

2. CIRCUIT

Terminal Connections as viewed ( ) - momentary
from bottom of switch: SP - single pole: terminals 1, 2 & 3.
DP - double pole: terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 -- 9

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	A	ON	NONE	OFF
-	B	(ON)	NONE	OFF
4	D	ON	NONE	ON
6	J	ON	OFF	ON
7	K	ON	OFF	(ON)
8	L	(ON)	OFF	(ON)
9	N	OFF	NONE	ON

SPECIAL CIRCUITS

H*	2 & 3	2 & 3, 5 & 4	5 & 4
G*	2 & 3, 5 & 6	2 & 3	OFF
M*	(2 & 3, 5 & 6)	2 & 3	OFF
R*	(2 & 3, 5 & 6)	2 & 3	2 & 1
E*	5 & 6	5 & 3	5 & 1
S*	2 & 3, 5 & 6	2 & 3	1 & 2

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3. RATING [3]

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F	10A 14V, 6A 14VT (circuit G only)

4. TERMINATION / BASE STYLE

8 Term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5. ILLUMINATION & SWITCH SEALING

Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

	Lamps	Illumination Type	Lamp wired to Terminals
S	NONE	–	–
C	2	UP	3 (+) 7 (–)
H	2	INDEPENDENT	8 (+) 7 (–)
	DOUBLE POLE SWITCHES ONLY		
M	1	UP	3 (+) 6 (–)

5. LOCK OPTION

W Low Profile Lock

Notes: Consult factory to verify horsepower rating for your particular circuit choice.

1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators.
3 Additional ratings available. See V-Series Switch Accessories page.

Configure Complete Part Number > Browse Standard Parts >

7. LAMP

No lamp	**0**			
Neon	**1** 125VAC	**2** 250VAC		
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright **8** 24V
LED*	**Red**	**Amber**	**Green**	**Red**
2VDC	**A**	**L**	**F**	**R**
6VDC	**B**	**M**	**G**	**S**
12VDC	**C**	**N**	**H**	**T**
24VDC	**D**	**P**	**J**	**V**

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8. BRACKET COLOR & PANEL SEAL

Color	No Gasket	1 Gasket	2 Gasket
Black	**B**	**C**	**D**
Gray	**G**	**H**	**J**
White	**W**	**Y**	**Z**

9. ACTUATOR COLOR / STYLE

FC	Black - Standard Rocker
FD	Black - Laser Etched
FS	Red - Standard Rocker
FT	Red - Laser Etched



10. LENS COLOR / STYLE

Z - No Lens

Clear	White	Amber	Green	Red	Blue	
1	**6**	**B**	**G**	**M**	**T**	
3	**8**	**D**	**J**	**P**	**V**	
5	**A**	**N/A**	**N/A**	**N/A**	**N/A**	Laser-Etched Only

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11. ACTUATOR LOCK COLOR / FUNCTION [1]

	LOCK IN POSITION			
Lock Color	UP	DOWN	UP & DOWN	CENTER
Match Actuator	**A**	**H**	**R**	**1**
Black	**B**	**J**	**S**	**2**
White	**C**	**K**	**T**	**3**
Red	**D**	**L**	**V**	**4**
Orange	**E**	**M**	**W**	**5**
Gray	**F**	**G**	**N**	**6**

12. ACTUATOR LENS OR BODY LEGENDS [2]

00 - No Legend

21 OFF **22** ON **23** O **24** I

25 O F F **26** O N **27** O **28** I



13. LEGEND ORIENTATION

0	No legend
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



Dimensional Specs

inches [millimeters]

CONTURA II

SHOWN WITH
SQUARE LENS



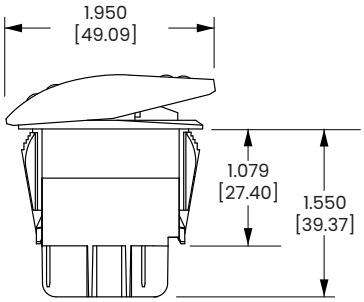

8 TERMINAL BASE W/BARRIERS

CONTURA III





8 TERMINAL BASE W/O BARRIERS

CONTURA IV

SHOWN WITH
BAR LENS





10 TERMINAL BASE W/BARRIERS





10 TERMINAL BASE W/BARRIERS



10 TERMINAL BASE W/O BARRIERS

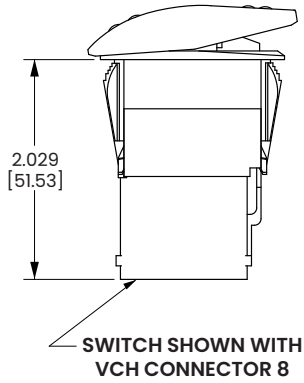

SWITCH SHOWN WITH VCH CONNECTOR 8 TERMINAL



BOTTOM VIEW TERMINAL ARRANGEMENT 8 TERMINAL BASE



BOTTOM VIEW TERMINAL ARRANGEMENT 10 TERMINAL BASE



SWITCH SHOWN WITH VC1 CONNECTOR 10 TERMINAL

Dimensional Specs

inches [millimeters]

CONTURA V

SHOWN WITH BAR LENS





8 TERMINAL BASE W/BARRIERS

CONTURA V

SHOWN WITH LOW PROFILE LOCK





8 TERMINAL BASE W/O BARRIERS

CONTURA VI

SHOWN WITH OVAL LENS





10 TERMINAL BASE W/BARRIER AND LAMP TERMINAL

CONTURA VII

SHOWN WITH LARGE LENS AND BAR LENS





10 TERMINAL BASE W/O BARRIERS

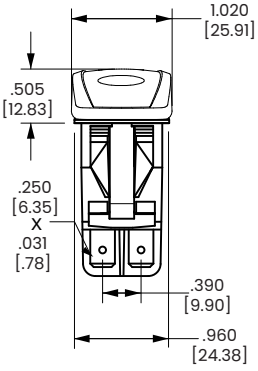

8 TERMINAL BASE W/BARRIERS

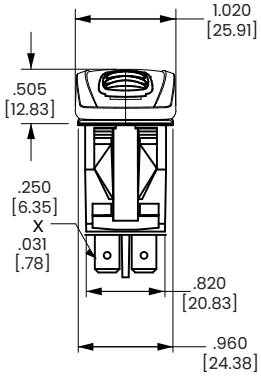

8 TERMINAL BASE W/O BARRIERS



10 TERMINAL BASE W/O BARRIERS



10 TERMINAL BASE W/O BARRIERS



SWITCH SHOWN WITH VCH CONNECTOR 8 TERMINAL



BOTTOM VIEW TERMINAL ARRANGEMENT 8 TERMINAL BASE



BOTTOM VIEW TERMINAL ARRANGEMENT 10 TERMINAL BASE



SWITCH SHOWN WITH VC1 CONNECTOR 10 TERMINAL



SWITCH SHOWN WITH VC1 CONNECTOR 10 TERMINAL

Dimensional Specs

inches [millimeters]

CONTURA X

SHOWN WITH RAISED BRACKET





8 TERMINAL BASE W/BARRIERS

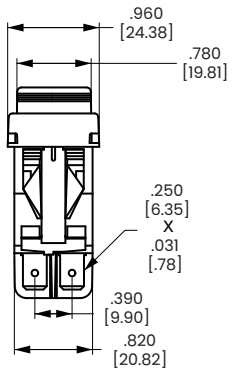

8 TERMINAL BASE W/BARRIERS



SWITCH SHOWN WITH VCH CONNECTOR 8 TERMINAL

CONTURA XI

SHOWN WITH RAISED BRACKET AND TWO SQUARE LENSES





10 TERMINAL BASE W/O BARRIERS

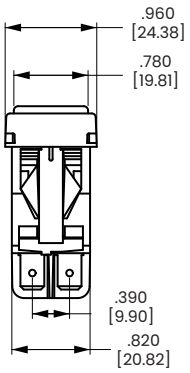

10 TERMINAL BASE W/O BARRIERS



BOTTOM WITH TERMINAL ARRANGEMENT 8 TERMINAL BASE



BOTTOM WITH TERMINAL ARRANGEMENT 10 TERMINAL BASE

CONTURA XII

SHOWN WITH PADDLE ACTUATOR





8 TERMINAL BASE W/O BARRIERS

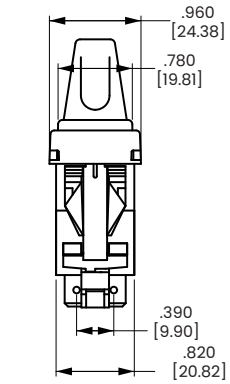

10 TERMINAL BASE W/O BARRIERS

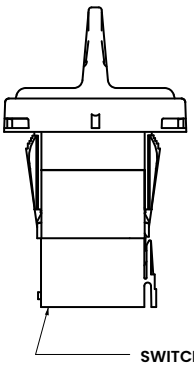

SWITCHES SHOWN WITH VC1 CONNECTOR 10 TERMINAL

CONTURA XIV

SHOWN WITH LARGE LENS





10 TERMINAL BASE W/O BARRIERS

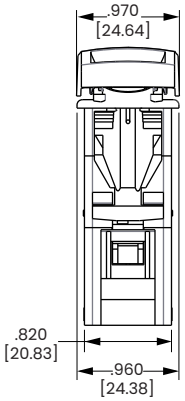



Circuit Diagrams:

CIRCUIT CODE	CIRCUIT DIAGRAM
1	
2	
3	
4	
5	
6	
7	
8	

CIRCUIT CODE	CIRCUIT DIAGRAM
A	
B	
C	
D	
E	
F	
G	
H	

CIRCUIT CODE	CIRCUIT DIAGRAM
J	
K	
L	
M	
R	
S	

SYMBOL LEGEND	
SYM.	DEFINITION
	DESIGNATES TERMINALS AND CONTACTS
	DESIGNATES MAINTAINED CIRCUITS
	DESIGNATES OTHER POSITION
	DESIGNATES MOMENTARY CIRCUITS
	DESIGNATES TWO POSITION CONNECTION
	DESIGNATES EXTERNAL JUMPER PROVIDED BY CUSTOMER

Lamp Circuit Diagrams:

LAMP CIRCUIT CODE	CIRCUIT DIAGRAM
A / 1	
B / 2	
C / 3	
D / 4	
E / 5	

LAMP CIRCUIT CODE	CIRCUIT DIAGRAM
F / 6	
G / 7	
H / Z	
J / 8	
K / W	

LAMP CIRCUIT CODE	CIRCUIT DIAGRAM
L / 9	
M / R	
N / T	
P / V	
U / Y	

LAMP CIRCUIT CODE	CIRCUIT DIAGRAM
SPECIAL #1	
SPECIAL #3	
SPECIAL #4	

J-Series Hazard Warning Circuit Diagrams:

CIRCUIT CODE	CIRCUIT DIAGRAM
J1	
J2	
J3	
J4	

CIRCUIT CODE	CIRCUIT DIAGRAM
J5	
JA	
JJ	
JK	

NOTE:
J circuits are available for all non-locking V-Series styles.
Consult factory for partnumber details.

SYMBOL LEGEND	
SYM.	DEFINITION
○	DESIGNATES TERMINALS AND CONTACTS
◯	DESIGNATES LAMP LOCATION

Stand-Alone Components

Reduce inventory levels and cost by stocking actuators and base switches separately.

Contura II, III, IV, V, VI, VII, X, XI, XII, XIV Base switches separately: specify V with code selections 2-8 in the ordering schemes.

Contura II, III, IV, V Actuator only: **VV** with code **A** or **C** for selection 9, & with selections 10-14 in the ordering schemes.

Contura VI Actuator with lenses and inserts only: **VT** with code selections 9-16

Contura II, III, IV, V, VII Actuator only: **VV** with code **A**, **C**, **E**, **G**, **P** or **Z** for selection 9 & with selections 10-14 in the ordering schemes.

Contura X, XI, XII, XIV actuators with lenses separately: **VV** with code selections 9-14 in the ordering schemes.

Panel Seal: VPS

Contura X & XI actuators without lenses separately

VVR	6	1	00	1
1	2	3	4	5

1. CONTURA X & XI ACTUATOR SEPARATELY

VVR

2. ACTUATOR STYLE & COLOR

	Black	Gray	White	Red
Contura X	**1**	**2**	**3**	**4**
Contura XI	**6**	**7**	**8**	**9**

3. LENS OPENING FOR 1

1 One bar lens
2 Two bar lenses
3 One square lens
4 Two square lens
5 square lens on top/ bar lens on bottom (Contura X only)

4. ACTUATOR LENS OR BODY LEGEND

00 - No Legend this location
11 ON **12** OFF **13** I **14** O
15 O O F N F **16** O O N F F **17** O I **18** I O



For additional legend options & code, visit us at www.carlingtech.com

5. LEGEND ORIENTATION 1 [1]

0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4



Contura X, XI & XII top piece of 2-piece lens separately

VVT	1
1	2

1 TOP OF LENS SEPARATELY

VVT

2 COLOR

1 Clear **2** Smoke **3** White

Contura X, XI & XII actuator lens assembly:



1 piece lens/bar lens are positioned the same as bottom lens for assembly, minus the top lens. Lenses snap in from bottom.

Notes:
1 If actuator lens opening for 2 bar or 2 square lenses, legend orientation 0,1, or 2 must be chosen.
2 Center of actuator marking not available for Contura XII.
3 Legend is not available for bar style lens.
4 Not recommended with neon lamps.
5 Must also order top piece of 2 piece square lens separately.

Contura XII actuators without lenses separately

VVP	J	1	Z	21	1	00
1	2	3	4	5	6	7

1 CONTURA XII ACTUATOR SEPARATELY

VVP

2. ACTUATOR STYLE & COLOR

J Black **K** Gray **N** White **M** Red

3,4 LENS OPENING FOR 1

Z No lens **1** Bar lens **2** Square lens

5, 7 LENS OR BODY LEGEND [2]

00 - No Legend **21** OFF **22** ON **23** O **24** I **25** O F F **26** O N **27** O **28** I



For additional legend options & codes, visit us at www.carlingtech.com

6 LEGEND ORIENTATION [3]

0 No legend
1 Orientation 1
2 Orientation 2



Contura X, XI & XII actuator lens assembly separately

VVL	2	1	00	0
1	2	3	4	5

1 CONTURA X, XI & XII LENS SEPARATELY

VVL

2 LENS STYLE [3]

1 Bar lens
2 One Piece Square lens
3 Bottom of Two-Piece Square lens [5]

3 TRANSLUCENT LENS COLOR

1 Clear **2** White **3** Amber **4** Green [4] **5** Red **6** Blue [4]

4 LENS OR BODY LEGEND [2]

00 - No Legend **21** OFF **22** ON **23** O **24** I **25** O F F **26** O N **27** O **28** I



For additional legend options & codes, visit us at www.carlingtech.com.

5 LEGEND ORIENTATION [3]

0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4



Accessories

Easily integrate Contura products into your system, with Contura Accessories

Contura Connectors

Q.C. SELECTION GUIDE					
COMPANY SERIES	PART NO		WIRE RANGE		ORIEN-TATION
	PLAIN BRASS	TIN PLATED BRASS	AWG	MM² (REF)	
PACKARD 58 SERIES	02965580		12	3.0	B
	02965471	12010601	(2)16-14	(2)1.0-2.0	
	02965470		16-14	1.0-2.0	
	02965469	06288318	20-18	.5-.8	
PACKARD METRI-PACK 630 SERIES		12084590	105.0		A
		12052224	123.0		
		12015870	16-14	1.0-2.0	
		12020035	(2)22-18	(2).5-.8	
	12015832	12015869	20-18	.5-.8	
		12052222	20-22	.35-.5	
AMP 250 SERIES FASTIN-FASTON	60253-1	60253-2	16-12	1.3-3	B
			(2) 16	(2) 1.3	
	42100-1	42100-2	18-14	.8-2	
	60295-1	60295-2	22-18	.3-.9	



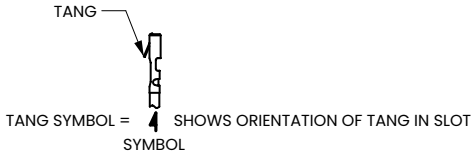

NOTE: Consult Delphi Packard and/or Amp on actual part numbers and availability.
AMP is a registered trademark of AMP Inc. Harrisburg, PA
Delphi Packard is a registered trademark of Delphi-Packard Electrical Systems Warr



VC1 CONNECTOR HOUSING



VC2 CONNECTOR HOUSING (For AMP terminals only)



VCH CONNECTOR HOUSING

Contura X Boot (P/N VB1-01)





Contura II, III, IV, V, VI & VII Actuator Removal Tool (P/N VRT)





Additional V-Series Ratings

1	.4VA @ 28VDC Resistive
4	10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, No Agency Listings
5 [1]	10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, UL Recognized, CSA Certified
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuits 1, 4, A, & D only)
F	10A 14V, 6A, 14VT (circuit G only)
G	20A 6V
H	20A 3V
L [2]	15A 125 VAC, 10A 250VAC, 1/2 HP 125-250 VAC; 6A 125 VAC L
M	.4VA/20A 12V (combi-contact) (combination gold/silver contacts for borderline dry circuit applications)
N	.4VA/15A 24V (combi-contact) (combination gold/silver contacts for borderline dry circuit applications)

NOTES
Consult factory to determine availability for individual circuits and their HP rating.
1. Not available with Contura 7 or 14 rocker styles.
2. Rating L available with circuits 1, 4, A & D only.

Accessories

Contura Mounting Panels
Dimensional Specifications: in. [mm]



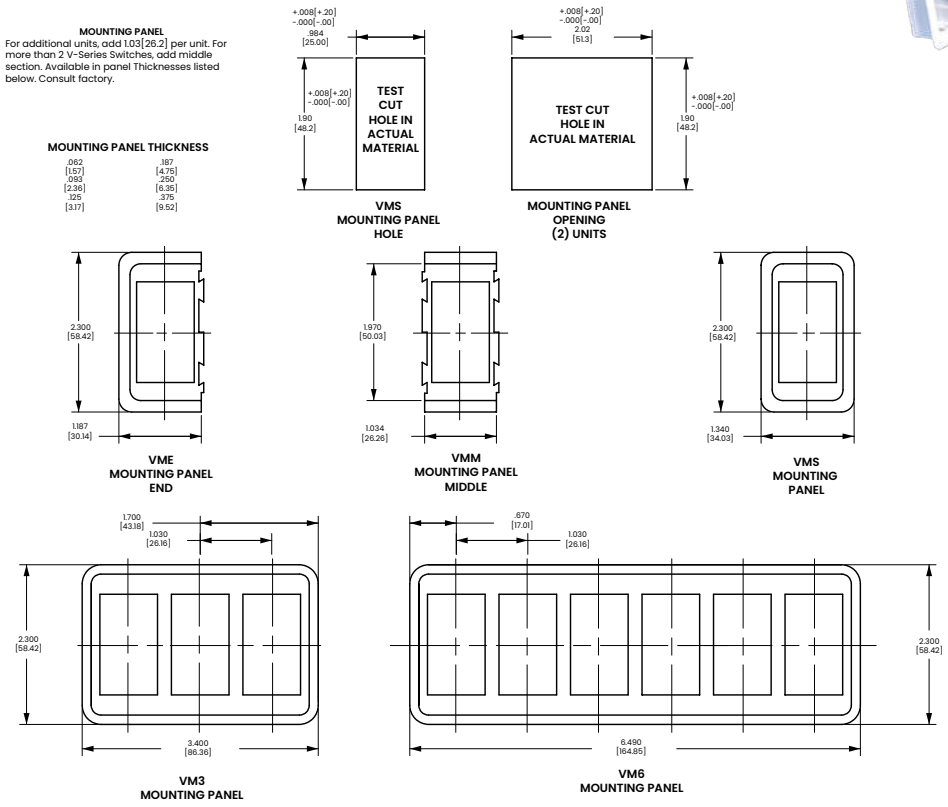

Contura Hole Plug
Dimensional Specifications: in. [mm]



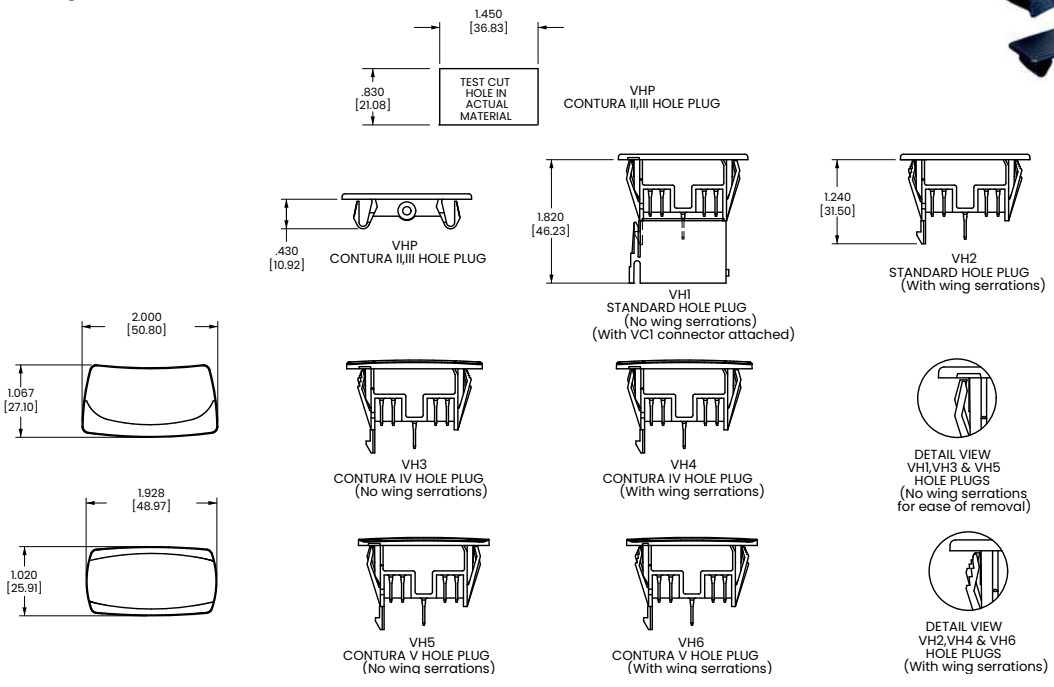

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit **www.carlingtech.com/findarep**.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With six ISO9001 and IATF16949 registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit **www.carlingtech.com/company-profile**.

To view all of Carling's environmental, quality, health & safety certifications please visit **www.carlingtech.com/environmental-certifications**.

© Carling Technologies, Inc.
Carling, Contura are registered trademarks of Carling Technologies, Inc. in the U.S. and other countries.