
V90A | SP | PLATE FIXING

PNEUMATIC RUBBER TYRED WHEEL WITH PRESSED STEEL CENTRE


260 diameter castor illustrated, 200 diameter castor has wheel with ribbed tread (see below)



200



260

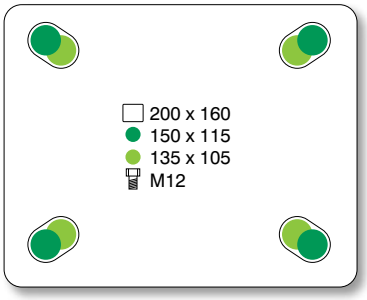

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
P	**200**	50	235	55	75	roller	**V90A 200 SPR P05**	**V91A 200 SPR P05**	**V92A 200 SPR P05**
P	**260**	85	307	85	150	roller	**V90A 260 SPR P07**	**V91A 260 SPR P07**	**V92A 260 SPR P07**

SP

PNEUMATIC RUBBER TYRED WHEEL WITH PRESSED STEEL CENTRE

200 diameter wheels have ribbed tread
260 diameter wheels have patterned tread



	wheel diameter	tread width	hub width	bore diameter	load capacity	plain bore	roller bearing	ball bearing
P	**200**	50	60	20	75		**A 200 SPR 20**	
P	**260**	85	88	20	150		**A 260 SPR 20**	



PUNCTURE-PROOF WHEEL

V90A series 260mm castors are available fitted with a puncture-wheel which has a closed cell microcellular polyurethane tyre and polypropylene

Please ask for details

Preferred range product, see page **1** *for details*

All dimensions are in ***mm*** *and all loadings are in* ***kg*** *unless otherwise stated*