EDISON

CABLE TIES MINIATURE RANGE

Material: UL approved Nylon 66, 94V-2. High tensile stregnth with low insertion force. Excellent resistance to weathering and ageing.


Feature: Suitable for a multitude of uses in various industries.

Application: Self-locking for fast and easy application.

Operating Temperature: -40°C to +85°C.



All Dimensions are approximate.

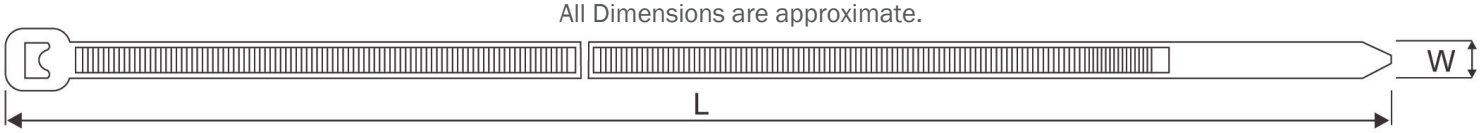

Colour	Width (mm)	Length (mm)	Max. Bundle Dia. (mm)	Min. Tensile Strength (kg)	Order Code EDI-515
Black	2.5	80	16	8	-3110K
Black	2.5	100	22	8	-3110K
Black	2.5	120	28	8	-3110K
Black	2.5	165	43	8	-3110K
Black	2.5	200	55	8	-3110K
Black	2.5	250	68	8	-3110K
Natural	2.5	80	16	8	-3110K
Natural	2.5	100	22	8	-3210K
Natural	2.5	120	28	8	-3210K
Natural	2.5	165	43	8	-3210K
Natural	2.5	200	55	8	-3210K
Natural	2.5	250	68	8	-3210K

EDISON P.O. Box 14, Wigston, Leicester, England, LE18 1AT.