EDISON

CABLE TIES INTERMEDIATE RANGE

Material: UL approved Nylon 66, 94V-2. High tensile stregnth with low insertion force. Excellent resistance to weathering and ageing.


Feature: Suitable for a multitude of uses in various industries.

Application: Self-locking for fast and easy application.

Operating Temperature: -40°C to +85°C.



All Dimensions are approximate.

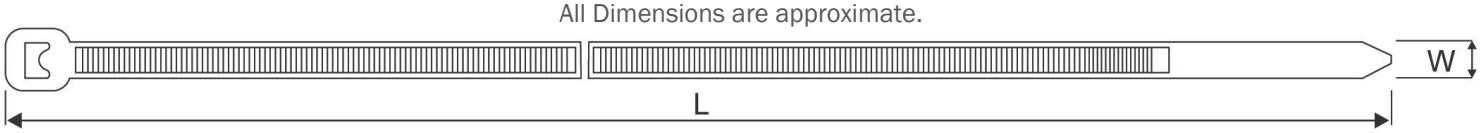

Colour	Width (mm)	Length (mm)	Max. Bundle Dia. (mm)	Min. Tensile Strength (kg)	Order Code EDI-515
Black	3.6	150	36	18	**-3120K**
Black	3.6	180	46	18	**-3120K**
Black	3.6	200	53	18	**-3120K**
Black	3.6	292	76	18	**-3120K**
Black	3.6	368	105	18	**-3120K**
Natural	3.6	150	36	18	**-3220K**
Natural	3.6	180	46	18	**-3220K**
Natural	3.6	200	53	18	**-3220K**
Natural	3.6	292	76	18	**-3220K**
Natural	3.6	368	105	18	**-3220K**

EDISON P.O. Box 14, Wigston, Leicester, England, LE18 1AT.