EDISON

CABLE TIES STANDARD RANGE

Material: UL approved Nylon 66, 94V-2. High tensile stregnth with low insertion force. Excellent resistance to weathering and ageing.


Feature: Suitable for a multitude of uses in various industries.

Application: Self-locking for fast and easy application.

Operating Temperature: -40°C to +85°C.



All Dimensions are approximate.

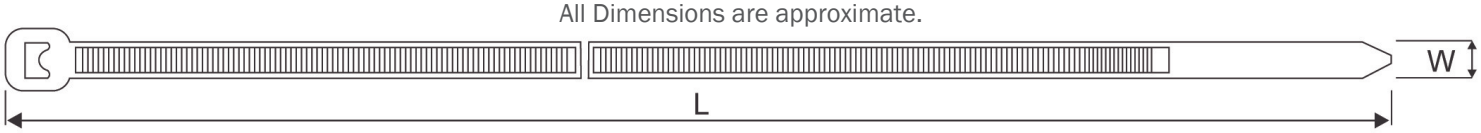

Colour	Width (mm)	Length (mm)	Max. Bundle Dia. (mm)	Min. Tensile Strength (kg)	Order Code EDI-515
Black	4.8	120	27	22	-3130K
Black	4.8	160	39	22	-3130K
Black	4.8	203	52	22	-3130K
Black	4.8	250	68	22	-3130K
Black	4.8	280	77	22	-3130K
Black	4.8	300	83	22	-3130K
Black	4.8	368	105	22	-3130K
Black	4.8	385	110	22	-3130K
Black	4.8	432	125	22	-3130K
Black	4.8	550	162	22	-3130K
Black	4.8	635	189	22	-3130K
Natural	4.8	120	27	22	-3230K
Natural	4.8	160	39	22	-3230K
Natural	4.8	203	52	22	-3230K
Natural	4.8	250	68	22	-3230K
Natural	4.8	280	77	22	-3230K
Natural	4.8	300	83	22	-3230K
Natural	4.8	368	105	22	-3230K
Natural	4.8	385	110	22	-3230K
Natural	4.8	432	125	22	-3230K
Natural	4.8	550	162	22	-3230K
Natural	4.8	635	189	22	-3230K

EDISON P.O. Box 14, Wigston, Leicester, England, LE18 1AT.