


Foundry Hook OKE

Stock No.	Code	WLL (t)	Dimensions (mm)						Weight (kg)
			L	B	E	F	G	H	
Z100853	OKE-7/8-10	2.6	124	63	28	12	21	26	0.8
Z100854	OKE-10-10	4.0	151	76	34	15	26	30	1.4
Z100855	OKE-13-10	6.8	184	90	44	19	33	39	2.8
Z100898	OKE-16-10	10.3	218	102	56	23	40	46	4.9
Z101340	OKE-20-10	16.0	247	114	60	27	46	60	7.2
Z101341	OKE-22-10	20.0	275	120	64	31	60	70	11.3
Z101342	OKE-26-10	27.3	300	113	70	35	64	77	16.0

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

For larger sizes, see Classic Grade 8.

4:1 Design Factor

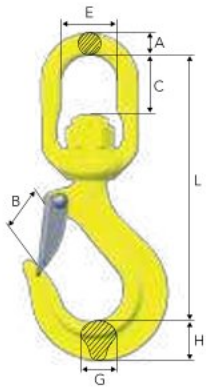


Swivel Latch Hook LKN

Sling hook with swivel for improved positioning of the hook before the load is lifted (360º rotation).

Stock No.	Code	WLL (t)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
Z101345	LKN-7/8-10	2.6	155	28	28	38	12	18	24	0.8
Z101346	LKN-10-10	4.0	192	35	37	44	15	23	31	1.5
Z101347	LKN-13-10	6.8	238	40	47	48	19	28	38	3.1
Z101348	LKN-16-10	10.3	295	53	65	61	25	34	43	5.3

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor

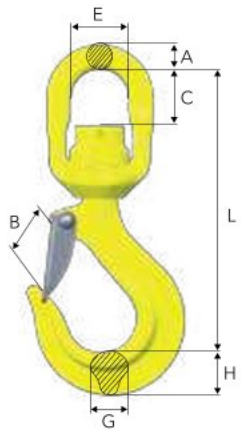


Swivel Latch Hook LKNK

Swivel latch hook with ball bearing for 360º rotation under full WLL.

Stock No.	Code	WLL (t)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
Z101349	LKNK-7/8-10	2.6	154	28	28	38	12	18	24	0.9
Z101350	LKNK-10-10	4.0	191	35	35	44	15	23	31	1.6
Z101351	LKNK-13-10	6.8	236	40	45	48	19	28	38	3.3
Z101352	LKNK-16-10	10.3	293	53	62	61	25	34	43	5.6
Z101354	LKNK-22-10	20.0	400	74	80	80	35	43	67	15.1

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor

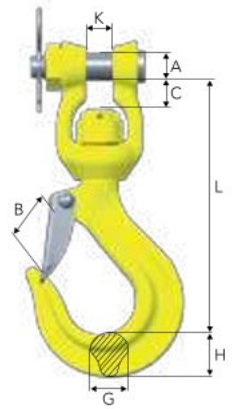

Clevis Swivel Hook LKNG

For direct connection to small cranes or similar applications that require positioning of hook.

Swivel for improved positioning (360°).

Stock No.	Code	WLL (t)	Dimensions (mm)							Weight (kg)
			L	B	C	A	G	H	K	
Z101353	LKNG-16-10	10.3	258	53	30	28	34	43	27	5.7

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor

Copyright © 2023 The Crosby Group LLC All Rights Reserved