


KANA Standard Roller Chains

Multiple Strand Roller Chains

● Order No. Example
KANA 40-4R 240 Links
10ft

Chain No. Unit

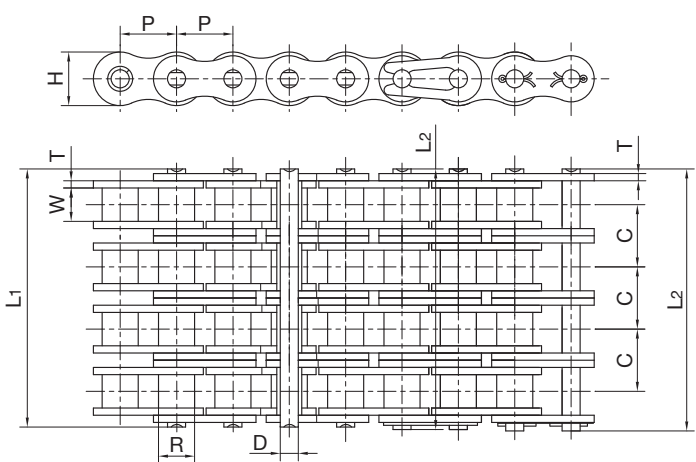

Chain No.	Pitch P mm	Roller Outer Diameter R mm	Inner Link Inner Width W mm	Pin Diameter D mm	Pin Length		Link Plate Width H mm	Link Plate Thickness T mm	Transverse Pitch C mm	Average Tensile Strength kN	Approx. Weight kg/m
					L1 mm	L2 mm					
40-4	12.70	7.95	7.85	3.96	59.8	61.0	12.00	1.5	14.38	62.04	2.57
50-4	15.875	10.16	9.40	5.08	75.1	76.6	15.09	2.0	18.11	97.68	4.30
60-4	19.05	11.91	12.57	5.94	94.4	96.1	18.00	2.4	22.78	139.92	6.21
80-4	25.40	15.88	15.75	7.92	121.0	124.4	24.00	3.2	29.29	249.48	10.37
100-4	31.75	19.05	18.90	9.53	147.8	152.1	30.00	4.0	35.76	389.40	15.60
120-4	38.10	22.23	25.22	11.10	187.0	190.8	35.70	4.8	45.44	558.80	23.56

Roller Chains

Chain Accessories

Idlers & Tensioners

Sprockets

Transmission Machine Keys

Connector Chains/Sprockets

Chain Couplings