

KANA Standard Roller Chains

Triplex Roller Chains


●Order No. Example

KANA 08B-3R 240 Links

10ft

Chain No.

Unit

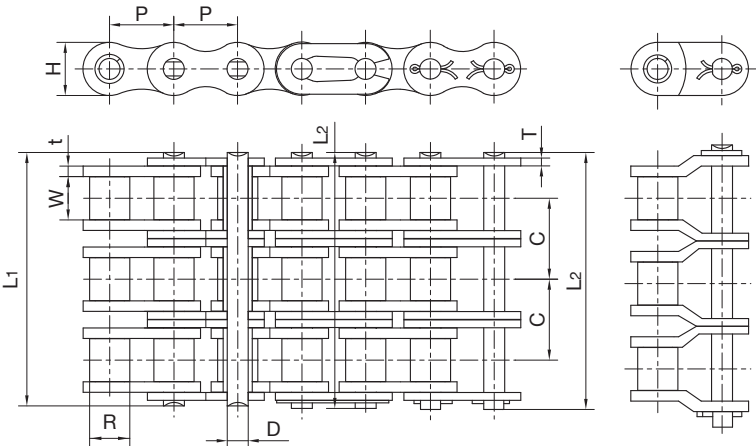

Chain No.	Pitch P mm	Roller Outer Diameter R mm	Inner Link Inner Width W mm	Pin Diameter D mm	Pin Length		Link Plate Width H mm	Link Plate Thickness t/T mm	Transverse Pitch C mm	Average Tensile Strength kN	Approx. Weight kg/m
					L1 mm	L2 mm					
*06B-3	9.525	6.35	5.72	3.28	33.5	34.6	8.20	1.30	10.24	30.1	1.16
08B-3	12.70	8.51	7.75	4.45	45.1	46.1	11.80	1.60	13.92	57.8	2.03
10B-3	15.875	10.16	9.65	5.08	52.7	54.1	14.70	1.70	16.59	84.5	2.77
12B-3	19.05	12.07	11.68	5.72	61.5	63.1	16.00	1.85	19.46	101.8	3.46
16B-3	25.40	15.88	17.02	8.28	99.8	101.2	21.00	4.15/3.10	31.88	227.1	8.13
20B-3	31.75	19.05	19.56	10.19	114.2	117.9	26.40	4.50/3.50	36.45	334.3	10.82
24B-3	38.10	25.40	25.40	14.63	150.1	154.6	33.20	6.00/4.80	48.36	493.0	20.10
28B-3	44.45	27.94	30.99	15.90	184.2	188.7	36.70	7.50/6.00	59.56	609.5	24.92
32B-3	50.80	29.21	30.99	17.81	183.2	188.2	42.00	7.00/6.00	58.55	770.5	31.56

*Straight side plates