


KANA Stainless Steel Roller Chains

● Order No. Example

KANA 40SS-1 240 Links
10ft

Chain No.

Unit

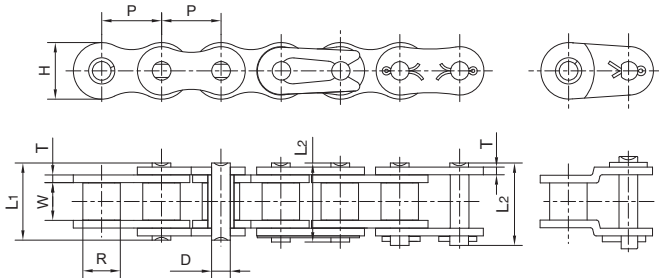

Chain No.	Pitch P mm	Roller Outer Diameter R mm	Inner Link Inner Width W mm	Pin Diameter D mm	Pin Length		Link Plate Width H mm	Link Plate Thickness T mm	Approx. Weight kg/m
					L1 mm	L2 mm			
*25SS-1	6.35	3.30	3.18	2.31	7.90	8.40	6.00	0.8	0.15
*35SS-1	9.525	5.08	4.77	3.58	12.40	13.17	9.00	1.3	0.33
40SS-1	12.70	7.95	7.85	3.96	16.60	17.80	12.00	1.5	0.63
50SS-1	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.0	1.03
60SS-1	19.05	11.91	12.57	5.94	25.90	27.70	18.00	2.4	1.51
80SS-1	25.40	15.88	15.75	7.92	32.70	35.00	24.00	3.2	2.62
100SS-1	31.75	19.05	18.90	9.53	40.40	44.70	30.00	4.0	3.94
05BSS-1	8.00	5.00	3.00	2.31	8.20	8.90	7.10	0.8	0.20
#06BSS-1	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.3	0.41
08BSS-1	12.70	8.51	7.75	4.45	16.70	18.20	11.80	1.6	0.70
10BSS-1	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.7	0.94
12BSS-1	19.05	12.70	11.68	5.72	22.50	24.20	16.00	1.8	1.16
16BSS-1	25.40	15.88	17.02	8.28	36.10	37.40	21.00	4.1/3.1	2.73
20BSS-1	31.75	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	3.73

*Bush chain: R in the table indicates the external diameter of the bush

#Straight side plates