KENNEDY®

DATA SHEET

33 PCE Heat Shrink Tin Butt Connector Set


Contents:

Heat Shrink Tin Butt Connector[AWG26~22][0.2~0.5mm²]-Clear	8 PCE
Heat Shrink Tin Butt Connector[AWG22~16][0.5~1.5mm²]-Red	8 PCE
Heat Shrink Tin Butt Connector[AWG16~14][1.5~2.5mm²]-Blue	8 PCE
Heat Shrink Tin Butt Connector[AWG12~10][4~6mm²]-Yellow	8 PCE
PP Box	1 PCE

ORDER CODE
KEN-515-6800K

ITEM No. HE060032HA




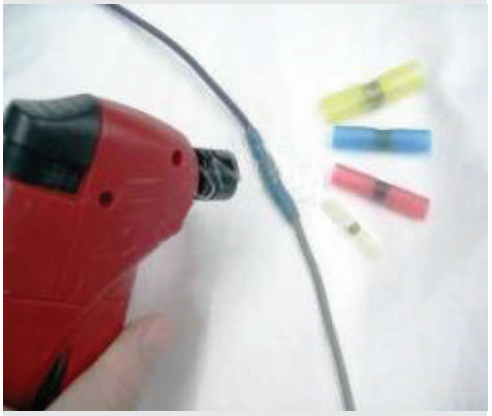


Specification:

Heat Shrink Tin Butt Connector

Terminal Material: Tin
Insulation Material: PE
Operating Temperature: -40˚C~ +105˚C
Shrink Ratio: 3:1
Maximum Electrical Rating: 600 Volts
Waterproof





Color	Dimension(mm)		Wire Range
	I.D.(d2)	Length(L)	AWG / mm²
Clear	2.0±0.1	0.30±0.05	AWG 26-22 0.2-0.5 mm²
Red	3.2±0.2	0.38±0.05	AWG 22-16 0.5-1.5 mm²
Blue	5.0±0.2	0.40±0.05	AWG 16-142 1.52-2.5 mm²
Yellow	6.5±0.2	0.40±0.05	AWG 12-10 4-6 mm²

Features:

- The colour tube appears a proper wire size and makes installation easy and lower cost
- Waterproof

MOQ: 600 Sets
Packing List:
10/150/CTN/10.5/11.5/KGS/2.4'
PP Box & Label
PP Box Size:
13.5 × 9 × 2.5cm (Include Hanger)
Unit Weight: 63.3g

P.O. Box 14, Wigston, Leicester, England LE18 1AT

© Copyright 2019 - Kennedy Tools