KENNEDY®


QUALITY INDUSTRIAL TOOLING

DUAL TRANSFER PUMP

MODEL:
DTP500

ORDER CODE:
KEN-540-3400K

- **Heavy duty aluminium construction**
- **Durable inlet and outlet valves**
- **Suitable for the transfer of many different liquid types**
- **500cc capacity**
- **Portable and easy to operate**
- **Ideal for use in many home, industrial and farm applications**

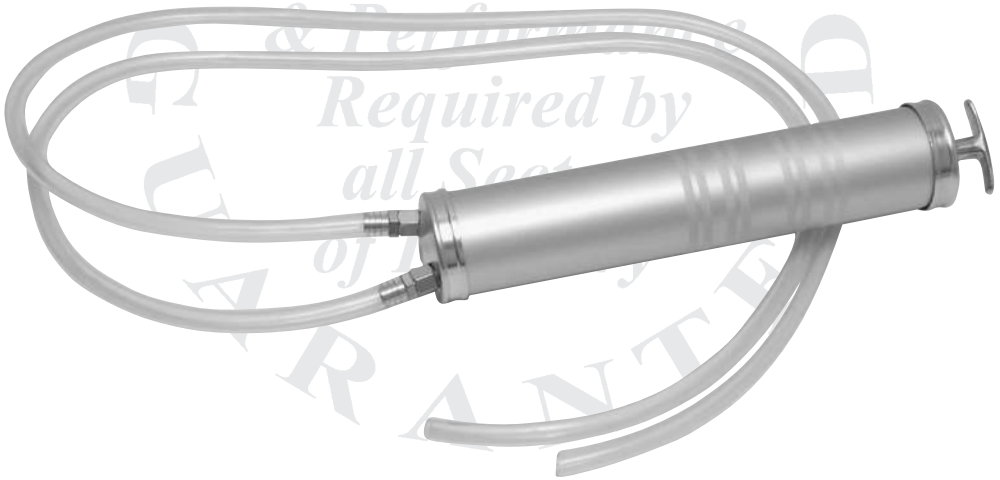

QUALITY "Assuring the Quality & Performance Required by all Sectors of Industry" GUARANTEED

OPERATOR'S MANUAL

Please retain this information for future reference.

KENNEDY thoroughly recommends reading these instructions before using this equipment, even if you have used them before. Reading these instructions carefully and understanding them fully will enable you to perform tasks correctly and will prevent injury to yourself or someone else.

⚠ WARNING

NO SMOKING! Under no circumstances should the operator of this equipment smoke cigarettes or ignite a flame when transferring liquids which may be flammable.

The operator should also ensure that the inlet and outlet hoses are clean and dry and free from any residual liquid.

THIS EQUIPMENT IS NOT SUITABLE FOR THE TRANSFER OF CAUSTIC OR ACIDIC SOLUTIONS.

OPERATION

The dual transfer pump is ideal for the transfer of petrol and other fluids from one vehicle to another or for draining containers of oil and other liquids. Please note the warning above with regard to the transfer of certain liquids.

Attach one of the two hoses to the inlet valve and the other to the outlet valve. Insert the inlet hose into the liquid to be transferred, making sure that the hose is close to the bottom of the container.

Place the outlet hose into the container/fuel tank to which the liquid is to be transferred. Withdraw the pump handle to its full extent and begin to pump until liquid appears in the inlet hose. If no liquid appears immediately, it may be necessary to keep pumping to clear the system of any air which is trapped in the system.

The user should also ensure that the two vehicles or containers are close enough together, so as to avoid any spillage.

It should be noted that some vehicles are fitted with anti-syphoning devices which preclude the transfer of fuel from one vehicle to another.

QUALITY GUARANTEE & WARRANTY

KENNEDY TOOLS carry a one year manufacturer's warranty.

KENNEDY TOOLS are designed & manufactured to the highest standards & specifications.
Assuring the quality and performance required by all sectors of industry.

KENNEDY TOOLS are fully guaranteed against faulty materials & workmanship.
Should they be found to be defective, they will either be repaired or replaced free of charge (fair wear and tear and/or misuse excepted).
This does not affect your legal rights.

Please retain supplier invoice as proof of purchase.

The Declaration of Conformity and Technical File for this product is held by The Kennedy Group Ltd. The Technical File may be inspected by a national authority upon request.

Kennedy Tools continually strives to improve its products. Specifications may change without prior notice.

KENNEDY TOOLS
Wigston, Leicester, England, LE18 2FS.
www.kennedy-tools.co.uk
Kennedy is a registered trade mark of The Kennedy Group Ltd.