
Inductive sensor

BES M30ML-PSC10A-S04G-W
BES02KM

BALLUFF
sensors worldwide

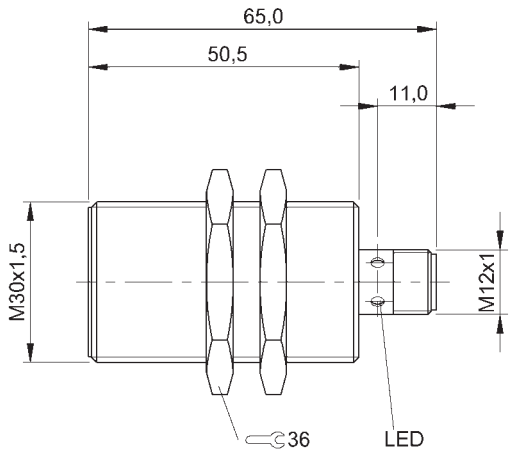

- **PNP**
- **Normally open (NO)**
- **10.00 mm**
- **Flush (shielded)**
- **Connector, M12x1-S04**

LISTED IND. CONT. EQ. 81U2 for use in the secondary of a class 2 source of supply

IND. CONT. EQ 81U2 for use in the secondary of a class 2 source of supply Environmental - Type 1 Enclosure

General attributes

Additional features	Factor 1 Weld-spatter resistant Factor 1 Weld-spatter resistant
Approvals / Conformity	cULus CE cULus CE
Basic standard	IEC 60947-5-2
Enclosure Type per IEC 60529	IP67
Function indicator	Yes
Magnetic field immune	immune to magnetic DC and AC fields
Polarity reversal protected	Yes
Power indicator	No
Protection Class	II
Short circuit protected	Yes
Trademark	Factor 1

Electrical attributes

Connection type	Connector
Eff. operating current Ie	200 mA
Eff. operating voltage Ue DC	24.0 V
Electrical version	DC, direct current
Load capacitance max. (at Ue)	1.000 µF
Magnetic field strength	100 kA/m
Max. no-load cur. Io undamped	10.0 mA
Minimum operating current Im	0 mA
No-load current Io damped max.	17.0 mA
Operating voltage UB max. DC [V]	30.0 V
Operating voltage UB min. DC [V]	10.0 V
Rated insulation voltage Ui	250 VAC
Rated short circuit current	100 A
Ripple max. (% of Ue)	15 %
Switching freq. f max. (at Ue)	600 Hz
Switching function	Normally open (NO)
Switching output	PNP
Voltage drop static max.	2.5 V

Mechanical attributes

Ambient temperature Ta max.	70 °C
Ambient temperature Ta min.	-25 °C
Assured operating distance Sa	8.10 mm
Connector type	M12x1-S04
Depth	65.0 mm
Diameter d1	M30x1.5
Eff. operating distance Sr	10.00 mm
Housing material	CuZn
Mech. installation condition	Flush (shielded)
Mounting length	50.5 mm
Rated operating distance Sn [mm]	10.00 mm
Sensing face material	LCP + PTFE
Surface protection	PTFE coating
Tightening torque	30 Nm

Additional text

The sensor is functional again after the overload has been eliminated.
With connector, e.g. BKS-S 20-… total length = switch length +18 mm.
With connector, e.g. BKS-S 20-… total length = switch length +18 mm.
The sensor is functional again after the overload has been eliminated.

