


ROLLER CABINET & TOOL CHEST SPARES

								
	Lock	Lock Line	Lock Line	Draw Slides	Lid Stays	Directional casters	Universal casters with brake	Armrest
Cabinet/Chest Order Code KENNEDY.	Order Code	Order Code	Order Code	Order Code	Order Code	Order Code	Order Code	Order Code
KEN-594-4845K	SPR-567-9501K	SPR-567-9502K		SPR-567-9506K	SPR-567-9503K			
KEN-594-4865K	SPR-567-9504K		SPR-567-9505K	SPR-567-9506K		SPR-567-9506K	SPR-567-9508K	SPR-567-9509K
KEN-594-4885K	SPR-567-9501K	SPR-567-9502K		SPR-567-9506K	SPR-567-9520K			
KEN-594-4825K	SPR-567-9504K		SPR-567-9505K	SPR-567-9506K		SPR-567-9507K	SPR-567-9508K	SPR-567-9509K

QUALITY GUARANTEE & WARRANTY

KENNEDY TOOLS carry a one year manufacturer's warranty.

KENNEDY TOOLS are designed & manufactured to the highest standards & specifications.
Assuring the quality and performance required by all sectors of industry.

KENNEDY TOOLS are fully guaranteed against faulty materials & workmanship.
Should they be found to be defective, they will either be repaired or replaced free of charge (fair wear and tear and/or misuse excepted).

Please retain supplier invoice as proof of purchase.

THE ENVIRONMENT

Always dispose of unwanted tools, accessories and packaging materials in an environmentally friendly manner.

Kennedy Tools continually strives to improve its products. Specifications may change without prior notice.


KENNEDY TOOLS
P.O. Box 14, Wigston, Leicester, England, LE18 1AT.

KENNEDY® PROFESSIONAL


ROLLER CABINETS & TOOL CHESTS

ORDER CODE


KEN-594-4825K 3-DRAWER EXTRA HEAVY DUTY TOOL CHEST - RED
KEN-594-4845K 7-DRAWER EXTRA HEAVY DUTY CABINET - RED
KEN-594-4865K 6-DRAWER X/LARGE EXTRA DUTY TOOL CHEST - RED
KEN-594-4885K 10-DRAWER X/LARGE EXTRA DUTY CABINET - RED

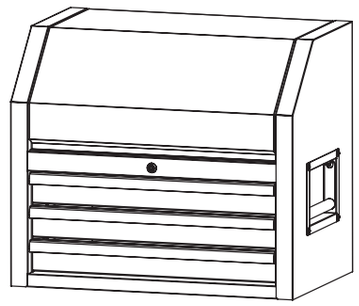

KEN-594-4825K



KEN-594-4845K

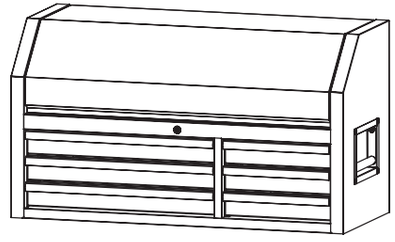

KEN-594-4865K



KEN-594-4885K

INSTRUCTION MANUAL

Please retain this information for future reference.


SAFETY GUIDELINES


KENNEDY Roller cabinets and tool chests are designed to help you work safely and efficiently. Storage equipment can be dangerous if the correct operating procedures are not followed. Safety procedures and assembly instructions are as follows:


- Read, study and understand all warnings and operating instructions before use.
- **DO NOT** alter the product in any way.
- **DO NOT** weld lock bars or dollies onto the unit.
- **DO NOT** mount the roller cabinet or tool chest onto any moving object such as a truck, van or lorry etc.

LOADING:

- **DO NOT** load from the top drawer first.
- **DO NOT** drop tools into the drawers.
- **DO NOT** completely fill only one drawer.
- **DO NOT** load a drawer from the front.
- The maximum product weight, including contents must not exceed 400kg.







USE:

- **DO NOT** open more than one loaded drawer at a time.
- Apply brakes on swivel castors when not moving unit.
- **DO NOT** stand on this product.
- **DO NOT** slam the drawers shut.


MOVEMENT:

- Close the lid and lock drawers before moving.
- **DO NOT** pull. Push to move.
- Keep the product on a level surface.
- **DO NOT** tow with power equipment.

FEATURES



Drawer Safety Catches

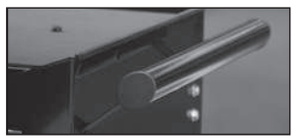

Heavy Duty Cabinet Handle



Heavy Duty Castors




Heavy Duty Gas Strut



Heavy Duty Chest Handles



Ball Bearing Drawer Slides

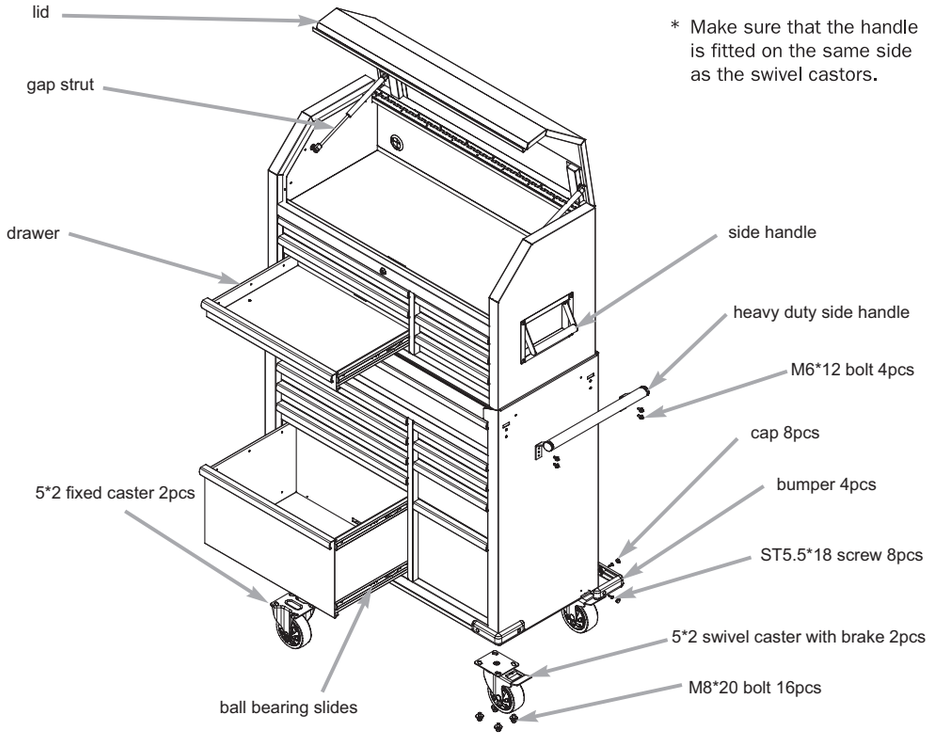

* Make sure that the handle is fitted on the same side as the swivel castors.

ASSEMBLY/MAINTENANCE

CASTORS:
The roller cabinet is fitted with four heavy duty castors consisting of two swivel castors with brakes and two fixed castors. If you need to replace a castor, the bottom drawer will need to be removed to enable the screw and nut assembly to be assembled.

SIDE HANDLE:
The side handle can be fitted either side of the cabinet but must be fixed on the same side as the swivel castors.

TO REMOVE DRAWERS:
The ball bearing slides have black retaining clips. To remove the drawer, the retaining clips need to be released by pushing the lever up (right hand side of the drawer) and down (left hand side of the drawer) simultaneously and pulling the drawer out. See Fig. 1

TO REINSTALL DRAWERS:
Pull the slides out and insert a slide on to each side of the drawer. Push the drawer gently in until it is completely inserted. The retaining clips will now be in place. Pull the drawer fully out to check that it will be held.

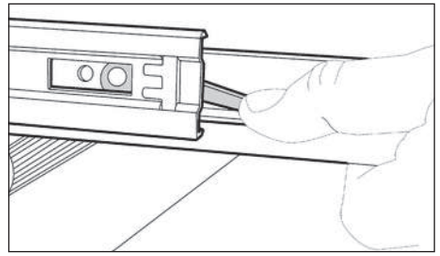


Fig. 1

LUBRICATION:
Lubricate the top and the bottom channels of the drawer slides at least twice a year with oil.

