
MATLOCK

ELECTRONIC KEY SAFE (48 KEYS)

ORDER CODE: MTL-620-5540K

BOX CONTENTS

- Safe – (Interior 0.15 cu. ft.)
- 2 mounting bolts
- 4 AA batteries
- 2 emergency override keys
- Scratch resistant carpet

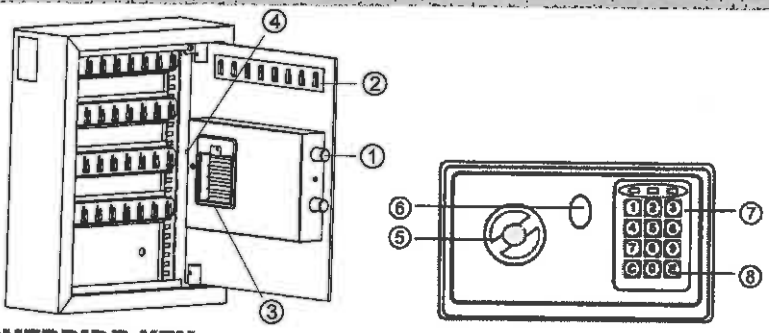


PARTS

1 Locking bolts
2 Movable hooks
3 Battery compartment
4 Reset Button
5 Master knob
6 Emergency override key cover
7 Control panel
8 (C) (E) Enter Buttons


OPEN THE SAFE – USING EMERGENCY OVERRIDE KEY

1 Remove the rubber emergency override key cover from front of safe
2 Insert override key into lock and turn key **counterclockwise**
3 Turn the master knob clockwise. Pull door open

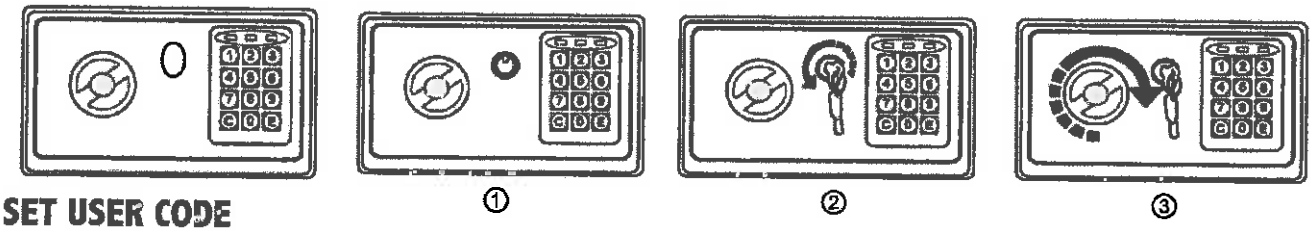

SET USER CODE

1 Open safe with emergency override key
2 Open the battery compartment and add the 4 AA batteries. Next, locate the red button on the inside
3 Press and hold the red reset button until you hear a beep and the yellow light comes on
4 Input your chosen 3-8 digit code then press (C) or the (E) button. Once the code is entered properly you will hear a beep
5 Try the code with the door still open to ensure that it was accepted
* If the yellow light flashes and the buzzer beeps 3 times the new code is invalid and the code input process will have to be repeated

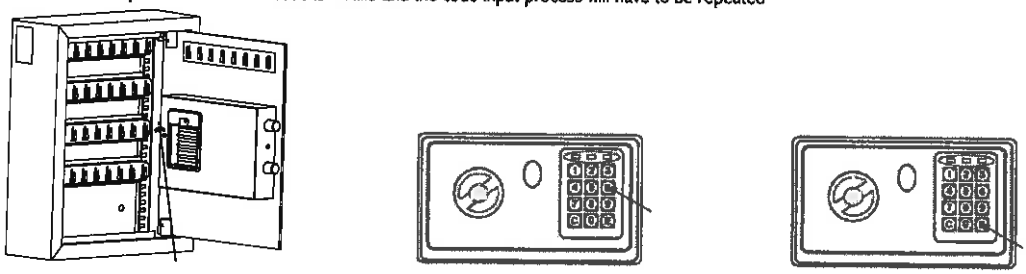


OPENING DOOR

1 Input your 3-8 digit code by pressing on the number pad
2 Press (C) or (E) button
3 Wait for the green light and a single beep
4 Turn the master knob clockwise to open door
* 3 continuous wrong entries will activate the warning beep for 20 seconds. Use emergency override key to open and stop beeping

MOUNTING

Safe can be mounted to any surface using supplied bolts
1 Open safe and locate the predrilled holes on the back or bottom of the safe
2 Drill holes for expansion bolts (or clamping screws)
3 Turn the expansion bolts counter clockwise to separate
4 Use the expansion bolts (or clamping screws) to secure the safe to the wall
5 Make sure the safe is mounted in place as required and then tighten all screws
* Use the **expansion bolts** for concrete surface
* Use **clamping screws** for wood surfaces

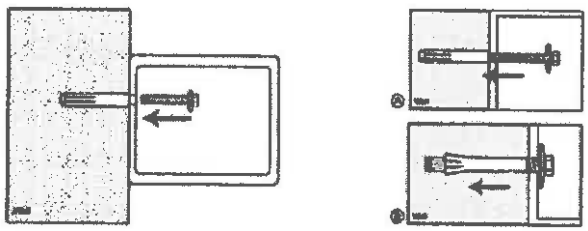

IMPORTANT INFORMATION

- **NEVER** keep your emergency override keys inside your safe
- Safe is only considered secure when fixed to a load bearing wall or joist
- Safe has limited 1 year warranty

MATLOCK
INDUSTRIAL PRODUCTS
Wigston, Leicester, England, LE18 2FS