ENVIRONMENT

Always dispose of unwanted tools, accessories and packaging materials in an environmentally friendly manner.

MATLOCK products are fully guaranteed against faulty workmanship.

Should they be found to be defective, they will be either repaired or replaced free of charge (fair wear and tear or misuse excepted).

Matlock is not liable for incidental or consequential damage or losses.

MATLOCK

INDUSTRIAL PRODUCTS

Security House, Wigston,

Leicester, England, LE18 2FS.

Matlock continually strives to improve its products. Specifications may change without prior notice.

Matlock is a registered trade mark of The Kennedy Group Ltd.

Supplied by an ISO9001 approved company.

MATLOCK

3-IN-1 HEAVY DUTY TRUCK CAPACITY - 250KG

MTL-985-0998K



1. Sack truck



2. 4 wheel sack truck



3. Platform truck

OPERATOR'S MANUAL

These instructions must be read by all users. Following these instructions carefully will help to avoid accidents, reduce repair costs and help to increase the lifetime of the truck.

⚠ SAFETY

- **These instructions must be read by all users. Following these instructions carefully will help to avoid accidents, reduce repair costs and help to increase the lifetime of the 3-in-1 truck.**
- **Before use inspect the 3-in-1 truck for any damage, wear and tear etc. If found remove the 3-in-1 truck from operation until a qualified engineer has repaired it with genuine parts.**
- **Before use ensure the user has the correct protective clothing on.**
- **Locate the 3-in-1 truck in a suitable clean, tidy and well lit work area.**
- **Ensure the 3-in-1 truck is of the correct capacity for the load being lifted. DO NOT exceed the rated capacity.**
- **Never load loose or unstable goods.**
- **Do not park the 3-in-1 truck on a slope.**
- **Never attempt to turn the 3-in-1 truck on a slope.**
- **Never stop the 3-in-1 truck on a slope.**
- **Never operate in rainy conditions.**
- **Do not park the 3-in-1 truck anywhere where it may cause an obstruction.**
- **It is forbidden for the operator to stand or sit on the 3-in-1 truck.**
- **It is forbidden to use the 3-in-1 truck to transport humans.**
- **The operator must ensure the cargo is not stacked too high as this will cause the 3-in-1 truck to overturn.**
- **The operator should pay attention at all times to ensure any clothing or body parts do not get too close to the 3-in-1 truck in case of entrapment, crushing or personal injury.**
- **Untrained personnel should stand away at a safe distant whilst the 3-in-1 truck is in operation.**
- **Before entering on to an elevator ensure that the elevator can bear the load of the 3-in-1 truck, cargo and operator before entering.**
- **DO NOT use the 3-in-1 truck for purposes other than that for which it is intended.**

SPECIFICATIONS

	MTL-985-0998K
Capacity:	250kg
Dimensions:	
As a platform truck:	710(H) x 1280(L)mm
As a 4 wheel sack truck:	840(H) x 1205(L)mm
As a basic sack truck:	1280(H)mm
Horizontal platform height:	260(H)mm
Toe plate size	470(W) x 190(D)mm
Weight:	19kg

OPERATING INSTRUCTIONS

Ensure you have thoroughly read the safety instructions before operating the 3-in-1 truck.

4 wheel sack truck assembly

1. Unhook the locking hook
2. Tilt back the truck and pull the frame with the two castors towards you (see Fig. 1).
3. Secure the frame with the locking hook.



Fig. 1.
4 wheel sack truck

Platform truck assembly

1. Unhook the locking hook.
2. Pull the frame with the two castors out towards you and lay the main truck frame flat (see Fig. 2).
3. Ensure that the platform is secure and stable before use.



Fig. 2.
Platform truck

Sack truck assembly

1. Make sure that the truck is in an upright position.
2. Ensure that the frame with the two castors is secured in an upright position using the locking hook before use (see Fig. 3).

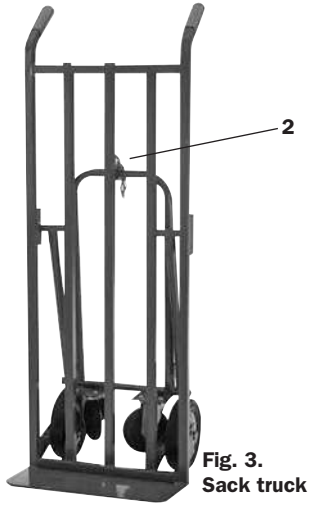


Fig. 3.
Sack truck

Storage

After use, store in an upright position and use the locking hooks to secure the truck so that it doesn't fall flat (see Fig. 3).