

SIRCO PV UL 98B

Load break switches for photovoltaic applications
from 100 to 2000 A, up to 1500 VDC





Function

SIRCO PV UL 98B are manually operated multipolar load break switches. They make and break under load conditions and provide safety isolation for any PV circuit up to 1000 VDC (as per UL 98B standard) and 1500 VDC (as per IEC 60947-3). They comply with NEC Atr. 690 (US National Electrical Code) concerning photovoltaic installations. They are compliant for use within solar inverters and enclosures governed by standard UL1741.

SIRCO PV are extremely durable switches that have been tested and approved for use in the most demanding environments.

They have been designed and tested for all types of applications: connected to earth, floating or bipolar.

Advantages

Performance

A glass fibre reinforced polyester break chamber with an arc extinguishing system provides a patented safety disconnection system offering rapid extinguishing of the electric arc up to 1500 VDC and current interruption up to 2000 A.

Back-to-back double load break switch

The system of back-to-back double switches enables:

- on load operation of two switches with a single handle,
- compact solution when connecting two separate photovoltaic circuits compared with the use of two separate switches,
- easy connection,
- voltages above 1000 VDC are broken by the use of two poles in series.

The solution for

- Combiner box
- Recombiner box
- Inverter



Strong points

- Patented switching technology
- Positive break indication
- Up to 1000 VDC as per characteristics by UL 98B
- Up to 1500 VDC as per characteristics by IEC 60947-3
- Suitable for use in accordance with NEC Art. 690

Conformity to standards

- UL 98B Guide WHVA, file E346418
- CSA C22.2#4, Class 4651-02, file 112964
- NEC Art 690 Issue 2011
- IEC 60947-3


Approvals and certifications(1)

(1) Product reference on request.


socomec Innovative Power Solutions

New patented switching technology to break 500 VDC per pole

Most PV systems today are designed at 1000 VDC. Our new range of switches allows on-load breaking of 1000 VDC on just 2 poles. This innovation provides an extremely compact solution.

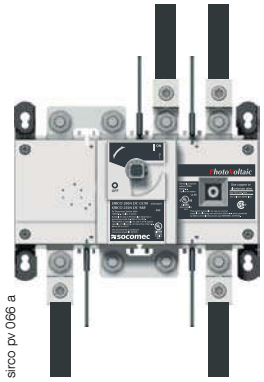

Classic solution
Example of connection of a 1000 VDC disconnect.

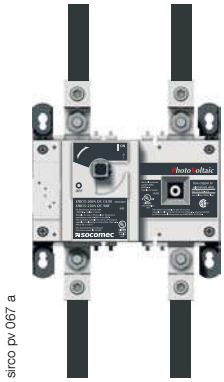

New
With our new range we can break 1000 VDC with 2 poles in series.

Optimise your investment


- Limit costs by reducing the number of bridging bars per device.
- Gain time by having a less number of bridging bars to install.
- Reduce the overall heat dissipation of the switch. A 2 pole SIRCO PV switch takes direct advantage of this, leading to possibility to use a smaller enclosure.

Limit potential risk

PV equipment is subject to extreme variation in temperature. Point of connection are therefore subject to potential loosening of connection due to breaking cooling effect. Limiting the number of poles greatly reduces the risk of a loose connection.

Allows to disconnect up to 4 circuits with one switch ("The Worlds first")

A compact and cost effective solution for recombiner applications. Allows to break up to 24 circuits by respecting the NEC article 690.

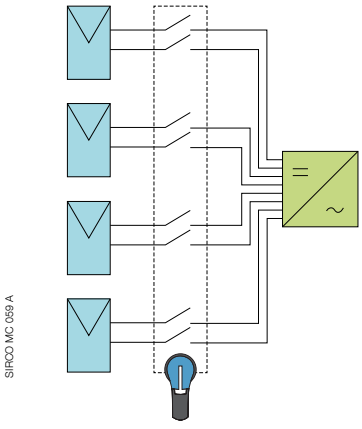


4 MPPT switches, 4 circuits are switched together.

Achieving 1500 VDC characteristics in a compact footprint

SOCOMEC's new technology enables Utilisation at 1500 VDC by connecting three poles in series.

- Each pole of a switch has a maximum voltage breaking capacity. To break a high DC voltage it is necessary to connect poles in series. The global on-load breaking capacity of a switch is determined by multiplying the max voltage breaking capacity per pole by the number of poles in series.
- Paralleling the poles on our double-stack design permits a higher current rating to be achieved.






350 A 1000 VDC 4 circuits.



400 A 1500 VDC



800 A 1500 VDC with a 400 A double stack switch.

References

1000 VDC - Back plate mounting

Rating (A)	Frame size	No. of poles	Switch body	External handle	Shaft for external handle
1 PV circuit					
100 A	B4	2 P	27PV **2009**	S2 type Black 1, 3R, 12 142F **2111**(1) Red/Yellow 1, 3R, 12 142G **2111**(1) Black 4, 4X 142D **2111**(1) Red/Yellow 4, 4X 142E **2111**(1)	200 mm 7.9 inches 1400 **1020** 320 mm 12.6 inches 1400 **1032** 400 mm 15.7 inches 1400 **1040**(2)
200 A	B4		27PV **2019**		
250 A	B4		27PV **2024**		
325 A	B5		27PV **2032**		
400 A	B5		27PV **2039**		
600 A	B6	4 P	27PV **4060**	S3 type Black 4, 4X 143D **3111**(1) Red/Yellow 4, 4X 143E **3111**(1)	200 mm 7.9 inches 1401 **1520** 320 mm 12.6 inches 1401 **1532** 400 mm 15.7 inches 1401 **1540**(2)
800 A	B7		27DC **4081**	S4 type Black 4, 4X 144D **3111**(1) Red/Yellow 4, 4X 144E **3111**(1)	
1200 A	B7		27DC **4121**		
2000 A	$B7_{DS}$	8 P	27DC **4201**	V1 type Black 3R, 12 2799 **7145**	320 mm 12.6 inches 4199 **3018**
2 PV circuits					
100 A	$B4_{DS}$	4 P	27PV **5009**	S2 type Black 1, 3R, 12 142F **2111**(1) Red/Yellow 1, 3R, 12 142G **2111**(1) Black 4, 4X 142D **2111**(1) Red/Yellow 4, 4X 142E **2111**(1)	200 mm 7.9 inches 1400 **1020** 320 mm 12.6 inches 1400 **1032** 400 mm 15.7 inches 1400 **1040**(2)
250 A	$B4_{DS}$		27PV **5024**		
325 A	B5		27PV **4032**		
400 A	B5		27PV **4039**		
600 A	$B6_{DS}$	8 P	27PV **8060**	V1 type Black 3R, 12 2799 **7145**	320 mm 12.6 inches 4199 **3018**
800 A	$B7_{DS}$		27DC **8081**		
1000 A	$B7_{DS}$		27DC **8101**		
4 PV circuits					
350 A	$B5_{DS}$	8 P	27PV **8039**	S3 type Black 4, 4X 143D **3111**(1) Red/Yellow 4, 4X 143E **3111**(1)	200 mm 7.9 inches 1401 **1520** 320 mm 12.6 inches 1401 **1532** 400 mm 15.7 inches 1401 **1540**(2)

(1) Defeatable handle.
(2) Shaft guide reference 1429 0000 is required for shaft length over 15.7 inches (400mm).

1500 VDC - Back plate mounting

UL 98B certification limit is 1000 VDC, that's why SIRCO PV UL switches are certified by the UL standard up to 1000 VDC and self-certified up to 1500 VDC.

Rating (A)	Frame size	No. of poles	Switch body	External handle	Shaft for external handle
1 PV circuit					
275 A	B5	3 P	27PV **3026**	S2 type Black 1, 3R, 12 142F **2111**(1) Red/Yellow 1, 3R, 12 142G **2111**(1) Black 4, 4X 142D **2111**(1) Red/Yellow 4, 4X 142E **2111**(1)	200 mm 7.9 inches 1400 **1020** 320 mm 12.6 inches 1400 **1032** 400 mm 15.7 inches 1400 **1040**(2)
325 A	B5		27PV **3032**		
400 A	B5		27PV **3039**		
600 A	$B6_{DS}$	8 P	27PV **8060**	V1 type Black 3R, 12 2799 **7145**	320 mm 12.6 inches 4199 **3018**
800 A	$B7_{DS}$		27DC **8081**		
1000 A	$B7_{DS}$		27DC **8101**		
2 PV circuits					
275 A	$B5_{DS}$	6 P	27PV **6026**	S3 type Black 4, 4X 143D **3111**(1) Red/Yellow 4, 4X 143E **3111**(1)	200 mm 7.9 inches 1401 **1520** 320 mm 12.6 inches 1401 **1532** 400 mm 15.7 inches 1401 **1540**(2)
350 A	$B5_{DS}$		27PV **6039**		

(1) Defeatable handle.
(2) Shaft guide reference 1429 0000 is required for shaft length over 15.7 inches (400mm).

Accessories

External operation

Use

In a combiner box, located close to the solar cell strings, or located close to the inverter, we recommend to use a door interlocked external handle for its safety features.

Door interlocked external operation handles include an escutcheon, are padlockable and must be utilized with an extension shaft.

Example

The locking function of the enclosure in the "ON" position will force the operator to safely disconnect and isolate the solar cell strings prior to any intervention. Opening the door when the switch is on "ON" position is possible by defeating the locking function using a tool (authorized persons only). The interlocking function is restored when the door is re-closed.



S2 type handle



Reinforced S2 type handle(1)

(1) Please consult us.

Frame size	Handle type	Handle colour	Nema degree of protection	Reference
B4 … B5 $B4_{DS}$	S2	Black	1, 3R, 12	142F **2111**
		Red/Yellow		142G **2111**
		Black	4, 4X	142D **2111**
		Red/Yellow		142E **2111**
$B5_{DS}$ B6	S3	Black		143D **3111**
		Red/Yellow		143E **3111**
B7	S4	Black		144D **3111**
		Red/Yellow		144E **3111**
$B6_{DS}$ … $B7_{DS}$	V1	Black	1, 3R, 12	2799 **7145**



S3 type handle



S4 type handle



V1 type handle


Shaft for external handle

Use

Standard lengths:
- 7.9 in / 200 mm,
- 12.6 in / 320 mm,
- 15.7 in / 400 mm.

Other lengths: please consult us.
19.69 in / 500 mm available.





Frame size	Handle type	Dimension (inches)	Dimension X (mm)	Length (inches)	Length (mm)	Reference
B4	S2	6 … 11.6	150 … 295	7.9	200	1400 **1020**
		6 … 16.3	150 … 415	12.6	320	1400 **1032**
		6 … 19.4	150 … 495	15.7	400	1400 **1040**
B5		8 … 12.9	203 … 328	7.9	200	1400 **1020**
		8 … 17.6	203 … 448	12.6	320	1400 **1032**
		8 … 20.7	203 … 525	15.7	400	1400 **1040**
B6	S3	8.70 … 13.50	220 … 343	7.9	200	1401 **1520**
		8.70 … 18.23	220 … 463	12.6	320	1401 **1532**
		8.70 … 21.38	220 … 543	15.7	400	1401 **1540**
B7	S4	12 … 14.4	305 … 366	7.9	200	1401 **1520**
		12 … 19.1	305 … 485	12.6	320	1401 **1532**
		12 … 22.2	305 … 564	15.7	400	1401 **1540**
$B4_{DS}$	S2	12 … 14.3	305 … 363	7.9	200	1400 **1020**
		12 … 19	305 … 483	12.6	320	1400 **1032**
		12 … 22.10	305 … 561	15.7	400	1400 **1040**
$B5_{DS}$	S3, S4	16 … 18.4	406 … 467	7.9	200	1401 **1520**
		16 … 23.1	406 … 589	12.6	320	1401 **1532**
		16 … 26.3	406 … 668	15.7	400	1401 **1540**
$B6_{DS}$	V1	20 … 28.1	508 … 714	12.6	320	4199 **3018**
		20 … 31.3	508 … 795	15.7	400	4199 **3019**
$B7_{DS}$		20 … 28.1	508 … 714	12.6	320	4199 **3018**
		20 … 39.4	508 … 795	15.7	400	4199 **3019**

S-type handle adapter

Use
For handles S2, S3 and S4.

Dimensions
Increases the distance between the handle grip and the door by 12 mm, for better handling.

Colour	Nema degree of protection	To be ordered in multiples of	Reference
Black	1, 3R, 12	10	1493 **0000**


acces_187_a_3_cat

Alternative S-type handle cover colours

Use
For handles S2, S3 and S4.

Other colours: please consult us.

Handle colour	Handle type	To be ordered in multiples of	Reference
Light grey	S2, S3	50	1401 **0001**
Dark grey	S2, S3	50	1401 **0011**
Light grey	S4	50	1401 **0031**
Dark grey	S4	50	1401 **0041**


acces_198_a_3_cat

Auxiliary contact

Use
Pre-break and signaling of positions 0 and I:
- 1 to 2 NO/NC auxiliary contacts,
- 1 to 2 low level NO/NC auxiliary contacts.

Electrical characteristics
A300.


acces_076_a_1_cat

NO/NC contact

Frame size	Position AC	Type	Reference
B4 … B7	1 contact	NO/NC	2799 **0021**
	2 contacts		2799 **0022**
$B4_{DS}$ … $B7_{DS}$	1 contact		4159 **0021**

Low level NO/NC auxiliary contacts

Frame size	Position AC	Type	Reference
B4 … B7	1 contact	NO/NC	2799 **0121**
	2 contacts		2799 **0122**
$B4_{DS}$ … $B7_{DS}$	1 contact		4159 **0022**

Terminal screen

Use
Top or bottom protection against direct contact with terminals or connection parts.

Frame size	No. of poles	Position	Pack	Reference
B4	2 P	Top	1 unit	2798 **3021**
	2 P	Bottom	1 unit	2798 **8021**
B5	3 P	Top	1 unit	2798 **3041**
	3 P	Bottom	1 unit	2798 **8041**
B5	4 P	Top or bottom	1 unit	2798 **4041**
B6	4 P	Top or bottom	1 unit	2798 **4061**
$B4_{DS}$	2 P	Top or bottom	1 unit	4158 **3021**
$B5_{DS}$	6 P	Top or bottom	1 unit	4158 **3041**
	8 P	Top or bottom	1 unit	4158 **4041**
$B6_{DS}$	8 P	Top and bottom	2 units	2798 **8061**
$B7_{DS}$	8 P	Top or bottom	1 unit	2798 **4121**


acces_079_a_1_cat

Accessories (continued)

Bridging bars for connecting poles in series

Use

The bridging bars will make easy the connection of the poles in series, allowing the following configurations(1).

(1) Other connections: refer to mounting instructions.

1000 VDC

Switch Reference	Frame size	Rating (A)	Quantity of bridging bar kits to be order per switch		Fig. of one bridging bar kit	Bridging bar kit Reference
			Not connected to earth	Connected to earth		
1 PV circuit						
27PV **2009**	B4	100	N/A	1	1	2709 **1020**
27PV **2019**	B4	200	N/A	1	1	2709 **1020**
27PV **2024**	B4	250	N/A	1	1	2709 **1020**
27PV **2032**	B5	325	N/A	1	2	2709 **1041**
27PV **2039**	B5	400	N/A	2	2	2709 **1041**
27PV **4060**	B6	600	2	3	6	2709 **0062**
27PV **4081**	B7	800	2	3	7	2709 **0081**
27PV **4121**	B7	1200	2	3	8	2709 **0121**
27PV **4201**	$B7_{DS}$	2000	6	6(1)	8	2709 **0121**
2 PV circuits						
27PV **5009**	$B4_{DS}$	100	N/A	2	1	2709 **1020**
27PV **5024**	$B4_{DS}$	250	N/A	2	1	2709 **1020**
27PV **4032**	B5	325	N/A	2	3	2709 **0027**
27PV **4039**	B5	400	N/A	2	4	2709 **0045**
27PV **8060**	$B6_{DS}$	600	4	6	6	2709 **0062**
27PV **8081**	$B7_{DS}$	800	4	6	8	2709 **0121**
27PV **8101**	$B7_{DS}$	1000	4	6	8	2709 **0121**
4 PV circuits						
27PV **8039**	$B5_{DS}$	350	N/A	4	5	2709 **0046**

1500 VDC

Switch Reference	Frame size	Rating (A)	Quantity of bridging bar kits to be order per switch		Fig. of one bridging bar kit	Bridging bar kit Reference
			Not connected to earth	Connected to earth		
1 PV circuit						
27PV **3026**	B5	275	1	2	3	2709 **0027**
27PV **3032**	B5	325	1	2	3	2709 **0027**
27PV **3039**	B5	400	1	2	4	2709 **0045**
27PV **8060**	$B6_{DS}$	600	6	6(2)	6	2709 **0062**
27PV **8081**	$B7_{DS}$	800	6	6(1)	8	2709 **0121**
27PV **8101**	$B7_{DS}$	1000	6	6(1)	8	2709 **0121**
2 PV circuits						
27PV **6026**	$B5_{DS}$	275	2	4	3	2709 **0027**
27PV **6039**	$B5_{DS}$	350	2	4	4	2709 **0045**

(1) Please order paralleling kit to connect back and front switches, see paralleling connection kit.

(2) Paralleling kit is needed to connect back and front switches, please consult us

socomec Innovative Power Solutions

Bridging bars for connecting poles in series (continued)

Figures are showing the content of 1 piece of a bridging bar kit, some configuration will require 2 kits per series and some bridging bar kits are composed of one or several pieces as heat sinks.

acces_391_b_1_x_cat

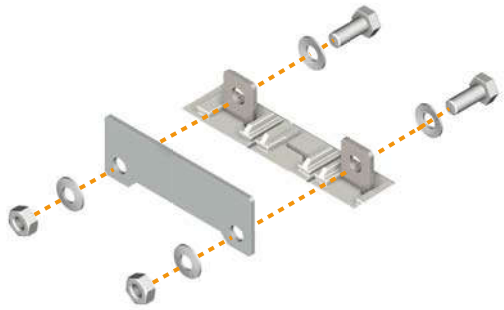


Fig. 1

acces_381_a_1_x_cat

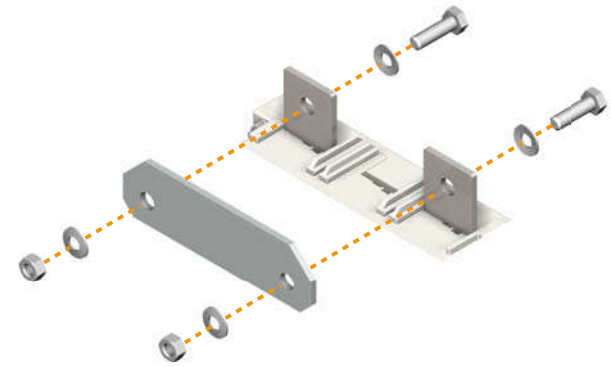


Fig. 2

acces_451_a_1_x_cat

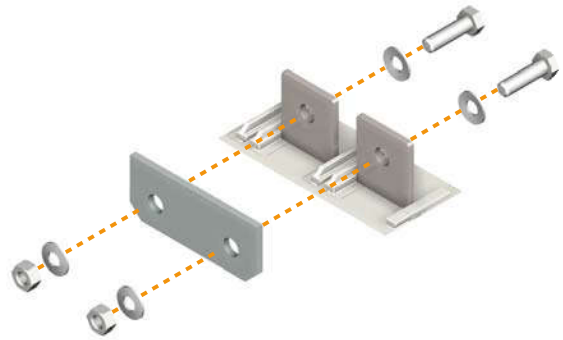


Fig. 3

acces_378_a_1_x_cat

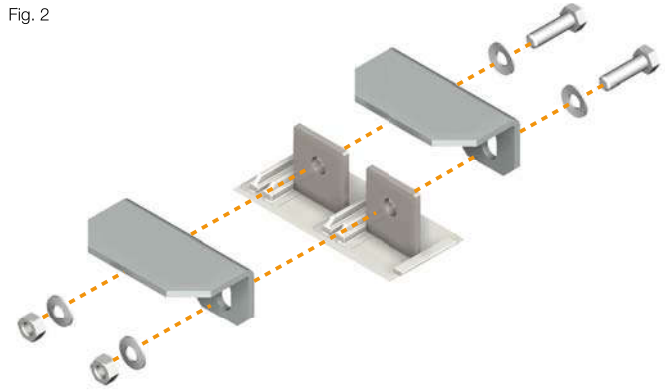


Fig. 4

acces_448_a_1_x_cat

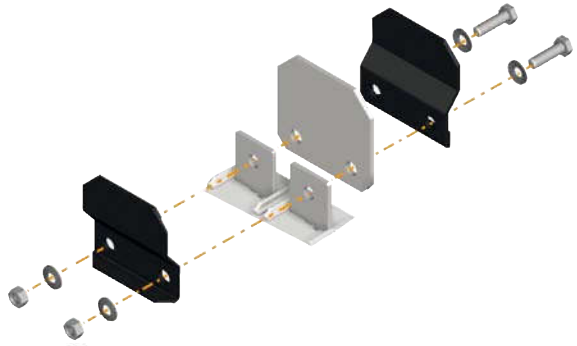


Fig. 5

acces_383_a_1_x_cat

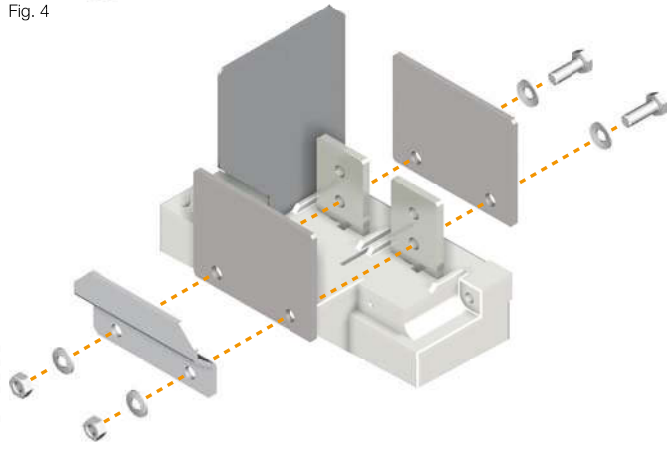


Fig. 6

acces_449_a_1_x_cat

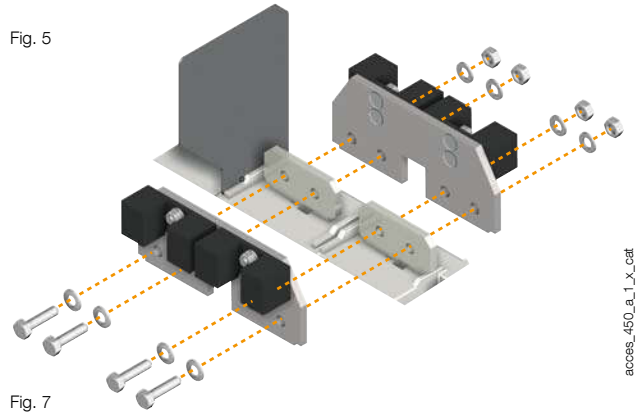


Fig. 7

acces_450_a_1_x_cat

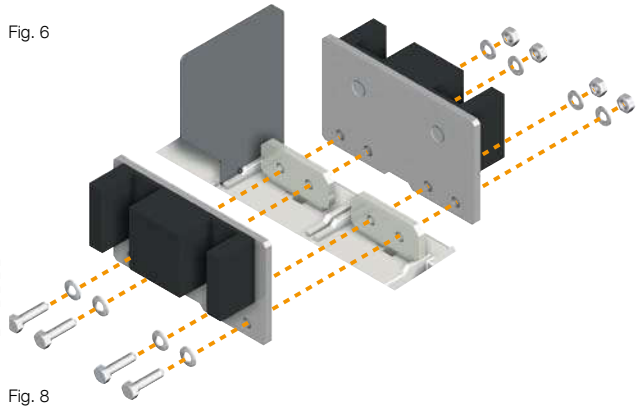


Fig. 8

Accessories (continued)

Cage terminals

Use

Connection of bare copper cables onto the terminals (without lugs).

Optional fan out kit for ratings of 800 to 1200 A for connecting several cables to the switch.

Frame size	Rating max (A)	Numbrer and size of cables	Max. number of connections per terminal	Type of cable	Quantity	Reference
B4 - $B4_{DS}$	100 … 250	1 conductor (#6-300MCM)	1	Cu / Al	2 lugs	3954 **2020**
		2 conductors (#4-2/0)	1	Cu / Al	2 lugs	3954 **2025**
B5 - $B5_{DS}$	325 … 400	1 conductor (#4-600MCM)	1	Cu / Al	2 lugs	3954 **2040**
		2 conductors (#6-350MCM)	1	Cu / Al	2 lugs	3954 **2041**
B6 - $B6_{DS}$	600	2 conductors (#2-600MCM)	1	Cu / Al	2 lugs	3954 **2060**
B7	800 … 1200	2 conductors (#2-600MCM)	2	Cu / Al	2 lugs	3954 **2060**
		2 conductors (#2-600MCM)	3(1)	Cu / Al	3 lugs	3954 **3060**
$B7_{DS}$	2000	2 conductors (#2-600MCM)	2(2)	Cu / Al	2 lugs	3954 **2060**
		2 conductors (#2-600MCM)	3(3)	Cu / Al	3 lugs	3954 **3060**



(1) Order a fan out kit reference 2709 1203 for connecting 3 connectors per terminal (6 in total for the switch).
(2) 2 connectors per terminal with the connection kit 2729 1200.
(3) 3 connectors per terminal with the connection kits 2729 1201 and 2709 1202.

Copper bar connection kits

Use

To allow connection between the two power terminals from a same pole for 2000 A ratings (Fig. 1, Fig. 2 and Fig. 3).

For 600 A, please consult us.

Fig. 1




Fig. 3





Fig. 2





Top or bottom flat connection

Frame size	Rating (A)	Figure	Quantity to order per pole	Number of terminals	Reference
$B7_{DS}$	800 … 1000	1	1	2	2729 **1200**
		2	1	3	2729 **1202**
	2000	1	1	2	2729 **1200**
		2	1	3	2729 **1202**

Top or bottom edgewise connection


Frame size	Rating (A)	Figure	Quantity to order per pole	Number of terminals	Reference
$B7_{DS}$	800 … 2000	3	1	3	2729 **1201**

Pole connections in series


1 PV circuit - 1000 VDC

B4-B5 - 2 P

Connected to earth




Not connected to earth




B6-B7 - 4 P


Connected to earth



Not connected to earth




Not connected to earth




$B7_{DS}$ - 8 P

Connected to earth

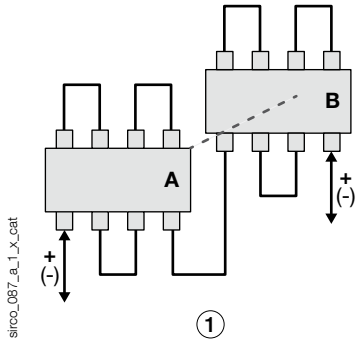

Not connected to earth

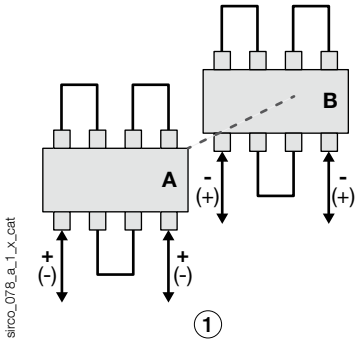


A. Front switch.
B. Rear switch.
1. Circuit 1.


1 PV circuit - 1500 VDC

B4-B5 - 3 P

Connected to earth




Not connected to earth




$B6_{DS}$-$B7_{DS}$- 8 P

Connected to earth

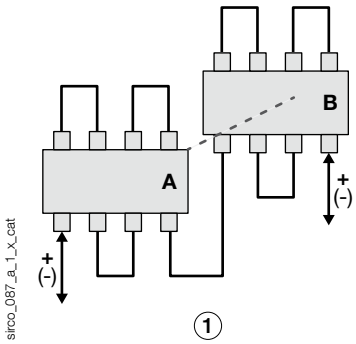

Not connected to earth

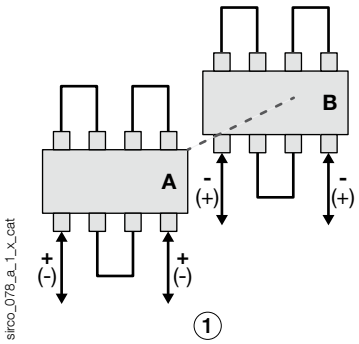


A. Front switch.
B. Rear switch.
1. Circuit 1.

Pole connections in series (continued)

2 PV circuit - 1000 VDC


$B4_{DS}$ - 4P

Connected to earth

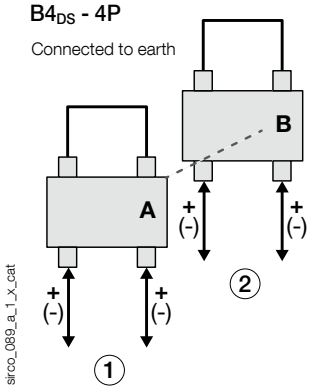

sirco_089_a_1_x_cat


Not connected to earth

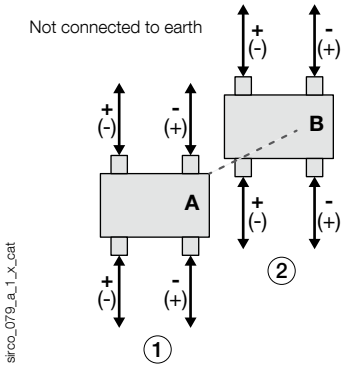

sirco_079_a_1_x_cat


B5 - 4P

Connected to earth



sirco_080_a_1_x_cat


Not connected to earth



sirco_080_a_1_x_cat


$B5_{DS}$-$B7_{DS}$ - 8P

Connected to earth




sirco_078_a_1_x_cat

Not connected to earth

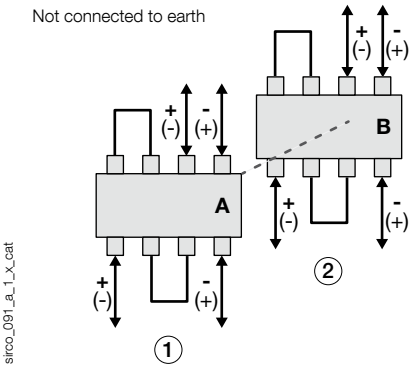

sirco_091_a_1_x_cat

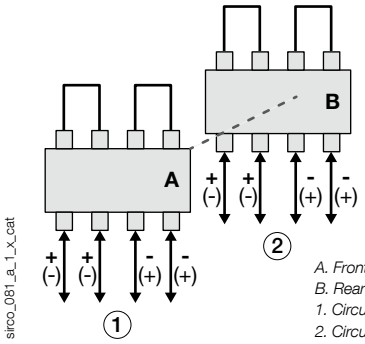


sirco_081_a_1_x_cat

A. Front switch.
B. Rear switch.
1. Circuit 1.
2. Circuit 2.

2 PV circuits - 1500 VDC


$B5_{DS}$ - 6P

Connected to earth

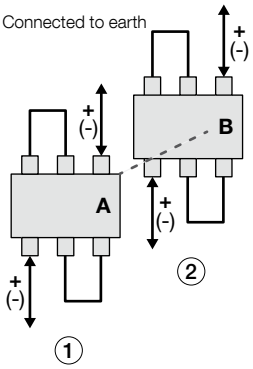

sirco_092_a_1_x_cat

Not connected to earth

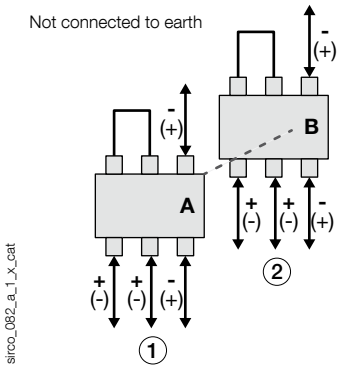


sirco_082_a_1_x_cat

A. Front switch.
B. Rear switch.
1. Circuit 1.
2. Circuit 2.

4 PV circuits - 1000 VDC


$B5_{DS}$ - 8P

Connected to earth



sirco_093_a_1_x_cat

Not connected to earth

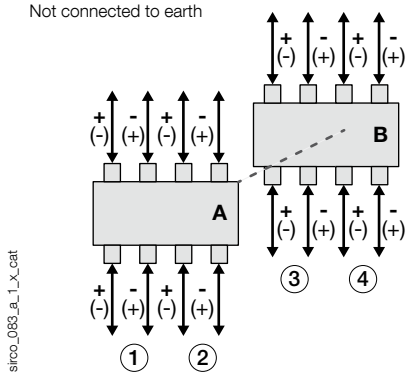

sirco_083_a_1_x_cat

A. Front switch.
B. Rear switch.
1. Circuit 1.
2. Circuit 2.
3. Circuit 3.
4. Circuit 4.

socomec Innovative Power Solutions

Characteristics

Compliance to UL 98B and IEC 60947-3 standards

SIRCO PV UL 98B switches comply with both UL 98B and IEC 60947-3 standards. As acceptance test criteria are different depending on one or the other standard, the same product can be referred to with two different ratings, identified in the characteristic table as follows:

- "Rating" for characteristics as per standard UL 98B.
- "Rated current" for characteristics as per standard IEC 60947-3.

UL 98B									
Rating (A)			**100 A**				**200 A**		
Number of circuits	**Rated voltage**		**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC		100	2 P	2 P	B4	200	2 P	2 P	B4
2 circuits	600 VDC		100	1 P	2 P	B4	130	1 P	2 P	B4
2 circuits	1000 VDC		100	2 P	4 P	$B4_{DS}$	200	2 P	4 P	$B4_{DS}$
4 circuits	600 VDC		100	1 P	4 P	$B4_{DS}$	130	1 P	4 P	$B4_{DS}$
Short-circuit capacity at 1000 VDC (any circuit breaker)									
Prospective short-circuit current (kA rms DC)			10(1)				10(1)			
Connection terminals									
Min. connection wire range/ AWG			#6				#6			
Max. connection wire range/ AWG			300MCM				300MCM			
Mechanical characteristics									
Durability (number of operating cycles)			10 000				10 000			
Operating effort (lbs.in/Nm)			88.5/10				88.5/10			
Auxiliary contact									
Electrical characteristics			A300				A300			
IEC 60947-3									
Rated current In			**160 A**				**250 A**			
Thermal current at 40°C (A)			**160**				**250**			
Thermal current at 50°C (A)			**160**				**250**			
Thermal current at 60°C (A)			**160**				**250**			
Rated insulation voltage U_i (V)			1500				1500			
Rated impulse withstand voltage U_{imp} (kV)			12				12			
Number of circuits	**Rated voltage**	**Utilisation category**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC	DC-21 B	160	2 P	2 P	B4	250	2 P	2 P	B4
1 circuit	1500 VDC	DC-21 B	160	4 P	4 P	$B4_{DS}$	250	4 P	4 P	$B4_{DS}$
2 circuits	1000 VDC	DC-21 B	160	2 P	4 P	$B4_{DS}$	250	2 P	4 P	$B4_{DS}$
4 circuits	600 VDC	DC-21 B	125	1 P	4 P	$B4_{DS}$	160	1 P	4 P	$B4_{DS}$

(1) Wwithout fuse during 50 ms.

Characteristics (continued)

as per standards UL 98B and IEC 60947-3

UL 98B									
Rating			**250 A**				**275 A**		
Number of circuits	**Rated voltage**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC	250	2 P	2 P	B4	275	2 P	2 P	B5
2 circuits	600 VDC	130	1 P	2 P	B4	215	1 P	2 P	B5
2 circuits	1000 VDC	250	2 P	4 P	$B4_{DS}$	275	2 P	4 P	B5
4 circuits	600 VDC	130	1 P	4 P	$B4_{DS}$	215	1 P	4 P	B5
4 circuits	1000 VDC	-	-	-	-	215	2 P	8 P	$B5_{DS}$
6 circuits	600 VDC	-	-	-	-	215	1 P	6 P	$B5_{DS}$
8 circuits	600 VDC	-	-	-	-	215	1 P	8 P	$B5_{DS}$
Short-circuit capacity at 1000 VDC (any circuit breaker)									
Prospective short-circuit current (kA rms DC)			10(1)				10(1)		
Connection terminals									
Min. connection wire range/ AWG			#6				2x#6		
Max. connection wire range/ AWG			300MCM				600MCM		
Mechanical characteristics									
Durability (number of operating cycles)			10 000				6 000		
Operating effort (lbs.in/Nm)			88.5/10				128.3/14.5		
Auxiliary contact									
Electrical characteristics			A300				A300		
IEC 60947-3									
Rated current In			**315 A**				**275 A**		
Thermal current at 40°C (A)			**315**				**275**		
Thermal current at 50°C (A)			**315**				**275**		
Thermal current at 60°C (A)			**315**				**275**		
Rated insulation voltage U_i (V)			1500				1500		
Rated impulse withstand voltage U_{imp} (kV)			12				12		
Number of circuits	**Rated voltage**	**Utilisation category**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC	DC-21 B	315	2 P	2 P	B4	275	2 P	2 P	B5
1 circuit	1500 VDC	DC-21 B	315	4 P	4 P	$B4_{DS}$	275	3 P	3 P	B5
2 circuits	1000 VDC	DC-21 B	315	2 P	4 P	$B4_{DS}$	275	2 P	4 P	B5
4 circuits	600 VDC	DC-21 B	160	1 P	4 P	$B4_{DS}$	275	1 P	4 P	B5
4 circuits	1000 VDC	DC-21 B	-	-	-	-	275	2 P	8 P	$B5_{DS}$
6 circuits	600 VDC	DC-21 B	-	-	-	-	275	1 P	6 P	$B5_{DS}$
8 circuits	600 VDC	DC-21 B	-	-	-	-	275	1 P	8 P	$B5_{DS}$

(1) Without fuse during 50 ms.

as per standards UL 98B and IEC 60947-3

UL 98B									
Rating			**325 A**				**350 A**		
Number of circuits	**Rated voltage**		**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC		325	2 P	2 P	B5	-	-	-	-
2 circuits	600 VDC		215	1 P	2 P	B5	-	-	-	-
2 circuits	1000 VDC		325	2 P	4 P	B5	350	3 P	6 P	$B5_{DS}$
4 circuits	600 VDC		215	1 P	4 P	B5	-	-	-	-
4 circuits	1000 VDC		325	2 P	8 P	$B5_{DS}$	350	2 P	8 P	$B5_{DS}$
6 circuits	600 VDC		215	1 P	6 P	$B5_{DS}$	215	1 P	6 P	$B5_{DS}$
8 circuits	600 VDC		215	1 P	8 P	$B5_{DS}$	215	1 P	8 P	$B5_{DS}$
Short-circuit capacity at 1000 VDC (any circuit breaker)									
Prospective short-circuit current (kA rms DC)			10(1)				10(1)			
Connection terminals									
Min. connection wire range/ AWG			2x#6				2x#6			
Max. connection wire range/ AWG			600MCM				600MCM			
Mechanical characteristics									
Durability (number of operating cycles)			6 000				6 000			
Operating effort (lbs.in/Nm)			128.3/14.5				128.3/14.5			
Auxiliary contact									
Electrical characteristics			A300				A300			
IEC 60947-3									
Rated current In			**400 A**				**500 A**			
Thermal current at 40°C (A)			**400**				**500**			
Thermal current at 50°C (A)			**400**				**500**			
Thermal current at 60°C (A)			**400**				**500**			
Rated insulation voltage U_i (V)			1500				1500			
Rated impulse withstand voltage U_{imp} (kV)			12				12			
Number of circuits	**Rated voltage**	**Utilisation category**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC	DC-21 B	400	2 P	2 P	B5	-	-	-	-
2 circuits	1000 VDC	DC-21 B	400	2 P	4 P	B5	500	3 P	6 P	$B5_{DS}$
4 circuits	600 VDC	DC-21 B	275	1 P	4 P	B5				
4 circuits	1000 VDC	DC-21 B	400	2 P	8 P	$B5_{DS}$	500	2 P	8 P	$B5_{DS}$
6 circuits	600 VDC	DC-21 B	275	1 P	6 P	$B5_{DS}$	275	1 P	6 P	$B5_{DS}$
8 circuits	600 VDC	DC-21 B	275	1 P	8 P	$B5_{DS}$	275	1 P	8 P	$B5_{DS}$

(1) Without fuse during 50 ms.

Characteristics (continued)

as per standards UL 98B and IEC 60947-3

UL 98B									
Rating			**400 A**				**600 A**		
Number of circuits	**Rated voltage**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC	400	2 P	2 P	B5	600	4 P	4 P	B6
2 circuits	600 VDC	215	1 P	2 P	B5	600	3 P	6 P	$B6_{DS}$
2 circuits	1000 VDC	400	2 P	4 P	B5	600	4 P	8 P	$B6_{DS}$
4 circuits	600 VDC	215	1 P	4 P	B5	-	-	-	-
Short-circuit capacity at 1000 VDC (any circuit breaker)									
Prospective short-circuit current (kA rms DC)			10(1)				10(1)		
Connection terminals									
Min. connection wire range/ AWG			2x#6				2x#2		
Max. connection wire range/ AWG			600MCM				2 x 600MCM		
Mechanical characteristics									
Durability (number of operating cycles)			6 000				6 000		
Operating effort (lbs.in/Nm)			128.3/14.5				327.5/37		
Auxiliary contact									
Electrical characteristics			A300				A300		
IEC 60947-3									
Rated current In			**500 A**				**800 A**		
Thermal current at 40°C (A)			**500**				**800**		
Thermal current at 50°C (A)			**500**				**800**		
Thermal current at 60°C (A)			**500**				**800**		
Rated insulation voltage U_i (V)			1500				1200		
Rated impulse withstand voltage U_{imp} (kV)			12				12		
Number of circuits	**Rated voltage**	**Utilisation category**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC	DC-21 B	500	2 P	2 P	B5	800	4 P	4 P	B6
1 circuit	1500 VDC	DC-21 B	500	3 P	3 P	B5	800	8 P	8 P	$B6_{DS}$
2 circuits	1000 VDC	DC-21 B	275	1 P	4 P	B5	800	4 P	8 P	$B6_{DS}$
4 circuits	600 VDC	DC-21 B	275	1 P	4 P	B5	-	-	-	-

(1) Without fuse during 50 ms.
(2) 1200 VDC for B6.

as per standards UL 98B and IEC 60947-3

UL 98B									
Rating			**800 A**			**1200 A**			
Number of circuits	**Rated voltage**		**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC		800	4 P	4 P	B7	1200	4 P	4 P	B7
2 circuits	600 VDC		800	3 P	6 P	$B7_{DS}$	1200	3 P	6 P	$B7_{DS}$
2 circuits	1000 VDC		800	4 P	8 P	$B7_{DS}$	1200	4 P	8 P	$B7_{DS}$
Short-circuit capacity at 1000 VDC (any circuit breaker)									
Prospective short-circuit current (kA rms DC)			10(1)				10(1)			
Connection terminals									
Min. connection wire range/ AWG			4x#2				4x#2			
Max. connection wire range/ AWG			6x 600MCM(2)				6x 600MCM(2)			
Mechanical characteristics									
Durability (number of operating cycles)			3 500				3 500			
Operating effort (lbs.in/Nm)			495.7/56				663.9/75			
Auxiliary contact									
Electrical characteristics			A300				A300			
IEC 60947-3									
Rated current In			**1000 A**				**1400 A**			
Thermal current at 40°C (A)			**1000**				**1400**			
Thermal current at 50°C (A)			**1000**				**1400**			
Thermal current at 60°C (A)			**1000**				**1400**			
Rated insulation voltage U_i (V)			1200				1200			
Rated impulse withstand voltage U_{imp} (kV)			12				12			
Number of circuits	**Rated voltage**	**Utilisation category**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC	DC-21 B	1000	4 P	4 P	B7	1400	4 P	4 P	$B7_{DS}$
1 circuit	1500 VDC	DC-21 B	1000	8 P	8 P	$B7_{DS}$	1000	8 P	8 P	$B7_{DS}$
2 circuits	1000 VDC	DC-21 B	1000	4 P	8 P	$B7_{DS}$	1000	4 P	8 P	$B7_{DS}$

(1) Without fuse during 50 ms.
(2) Maximum 6 x 600MCM with fan out kit 2729 1203.
(3) 1200 VDC for B7.

Characteristics (continued)


as per standards UL 98B and IEC 60947-3

UL 98B						
Rating			**2000 A**			
Number of circuits	**Rated voltage**		**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC		2000	8 P	8 P	$B7_{DS}$
Short-circuit capacity at 1000 VDC (any circuit breaker)						
Prospective short-circuit current (kA rms DC)			10(1)			
Connection terminals						
Min. connection wire range/ AWG			4x#2			
Max. connection wire range/ AWG			6x 600MCM(2)			
Mechanical characteristics						
Durability (number of operating cycles)			3 500			
Operating effort (lbs.in/Nm)			663.9/75			
Auxiliary contact						
Electrical characteristics			A300			
IEC 60947-3						
Rated current In			**2200 A**			
Thermal current at 40°C (A)			**2200**			
Thermal current at 50°C (A)			**1850**			
Thermal current at 60°C (A)			**1600**			
Rated insulation voltage U_i (V)			1200			
Rated impulse withstand voltage U_{imp} (kV)			12			
Number of circuits	**Rated voltage**	**Utilisation category**	**(A)**	**Number of pole(s) in series per polarity**	**Number of pole(s) of the device**	**Frame size**
1 circuit	1000 VDC	DC-21 B	2200	8 P	8 P	$B7_{DS}$

(1) Without fuse during 50 ms.
(2) Maximum 6 x 600MCM with fan out kit 2729 1203.


Dimensions (in/mm)

B4-B5

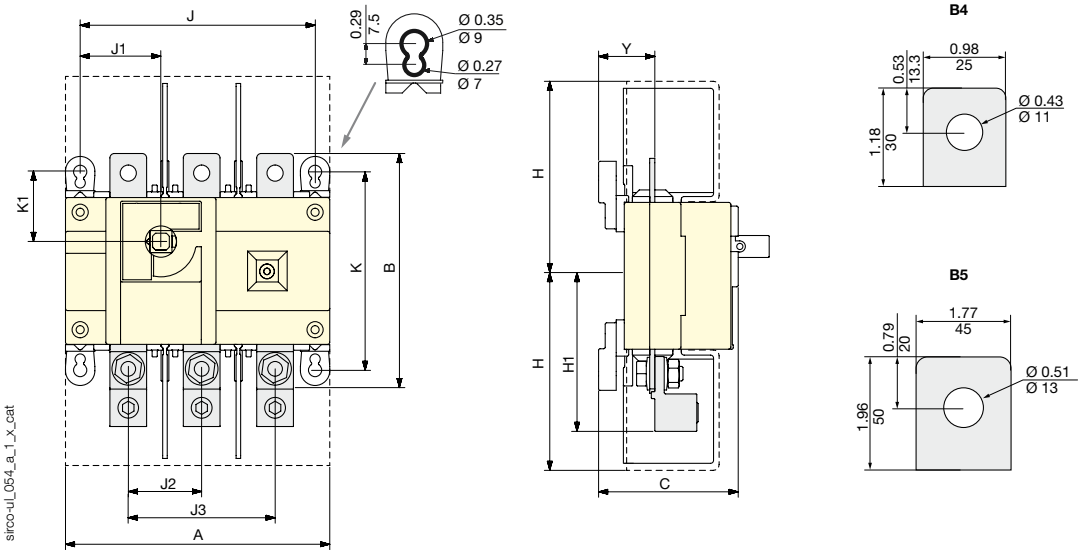

Frame size	No. of poles	Unit	A	B	C	H	H1 max.	J	J1	J2	J3	K	K1	Y
B4	2 P	inches	7.08	6.30	3.74	5.21	4.21	6.30	2.16	-	3.94	5.31	1.89	1.51
		mm	180	160	95	132.5	107	160	55	-	100	135	48	38.5
B5	2 P	inches	9.05	10.23	5.04	8	6.53	8.26	2.95	-	5.12	7.67	2.65	2.08
		mm	230	260	128	203	166	210	75	-	130	195	67.5	53
B5	3 P	inches	9.05	10.23	4.98	8	6.53	8.26	2.95	2.56	-	7.67	2.65	2.02
		mm	230	260	126.5	203	166	210	75	65	-	195	67.5	51.5
B5	4 P	inches	11.41	10.23	4.98	8	6.53	10.63	5.31	2.56	-	7.67	2.65	2.02
		mm	290	260	126.5	203	166	270	135	65	-	195	67.5	51.5


$B4_{DS}$-$B5_{DS}$

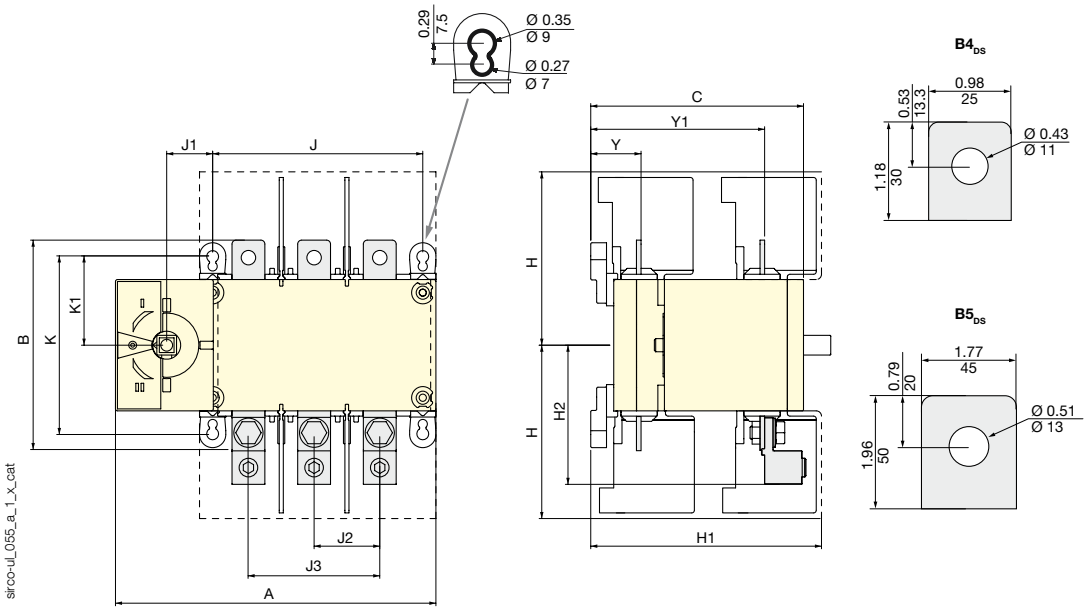

Frame size	No. of poles	Unit	A	B	C	H	H1	H1 max.	J	J1	J2	J3	K	K1	Y	Y1
$B4_{DS}$	4 P	inches	9.60	6.30	6.37	5.08	6.93	4.21	6.30	1.37	-	3.93	5.31	2.65	1.51	5.21
		mm	244	160	162	129	176	107	160	35	-	100	135	67.5	38.5	132.5
$B5_{DS}$	6 P	inches	11.85	10.23	9.39	8	6.51	6.53	6.26	1.37	2.56	-	7.67	2.70	2.02	7.44
		mm	301	260	238.5	203	165.5	166	210	35	65	-	195	68.5	51.5	189
$B5_{DS}$	8 P	inches	14.21	10.23	9.39	8	6.51	6.53	10.63	1.37	2.56	-	7.67	2.70	2.02	7.44
		mm	361	260	238.5	203	165.5	166	270	35	65	-	195	68.5	51.5	189


Dimensions (in/mm) (continued)

B6

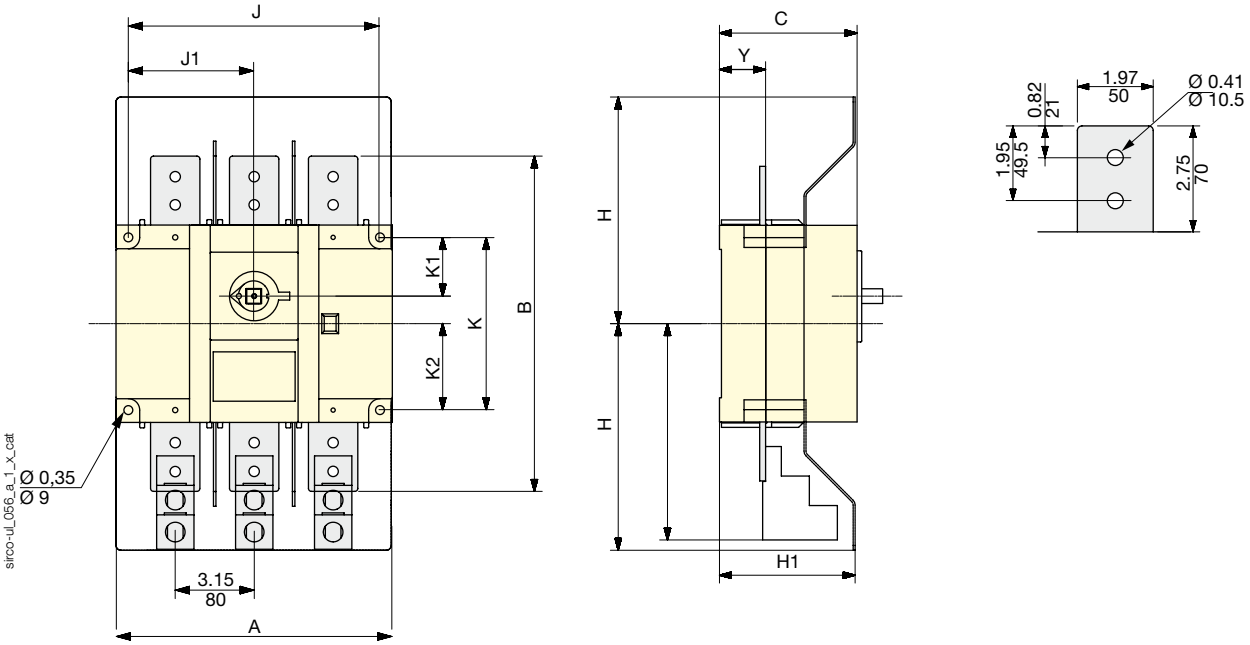


Frame size	No. of poles	Unit	A	B	C	H	H1	J	J1	K	K1	K2	Y
B6	4 P	inches	24.80	13.38	5.47	10.63	5.70	13.19	6.59	6.88	2.34	1.10	1.83
		mm	630	340	139	270	145	335	167.5	175	59.5	28	46.5

B6$_{DS}$

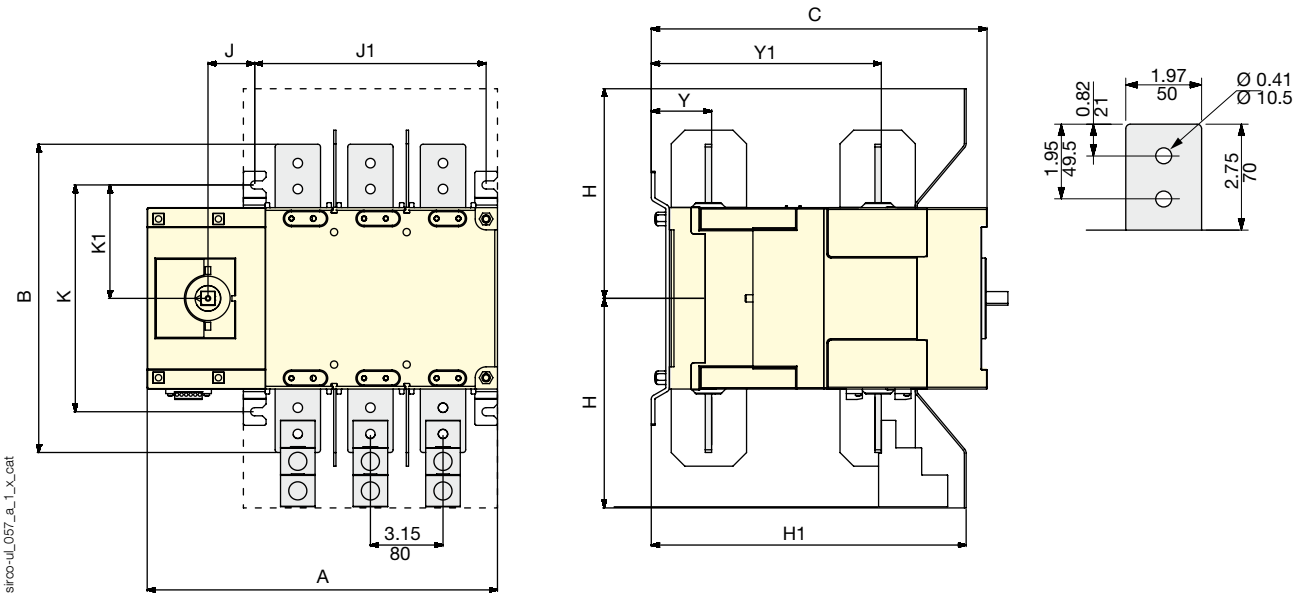


Frame size	No. of poles	Unit	A	B	C	H	H1	J	J1	K	K1	Y	Y1
B6$_{DS}$	8 P	inches	18.34	13.38	14.56	10.63	13.66	13.18	2.02	9.84	4.92	2.61	9.98
		mm	466	340	370	270	347	335	51.5	250	125	66.5	253.5

B7

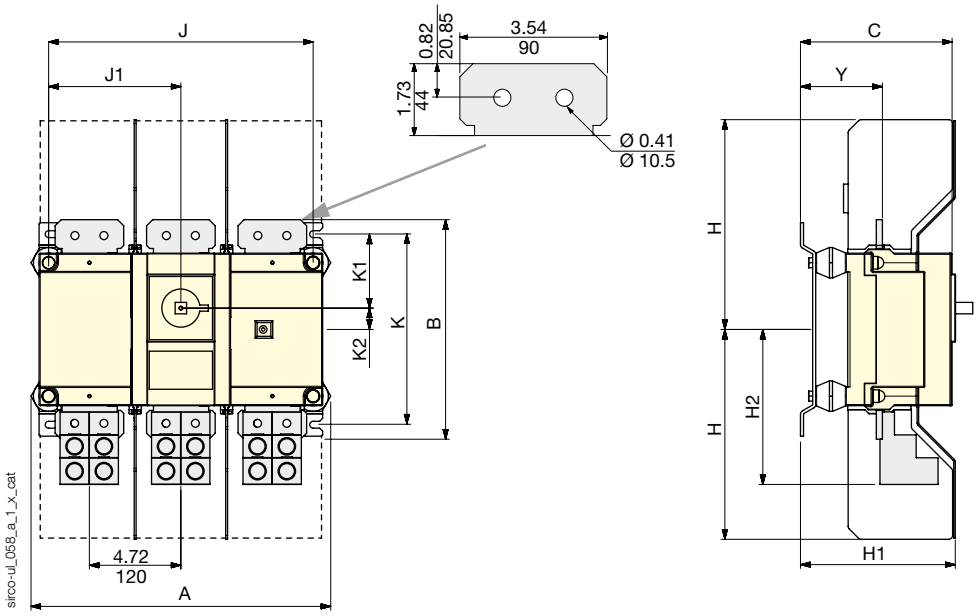

Frame size	No. of poles	Unit	A	B	C	H	H1	H2	J	J1	K	K1	K2	Y
B7	4 P	inches	20.19	11.33	7.97	11.89	8.30	8.01	18.38	9.19	9.84	3.82	1.10	4.23
		mm	513	288	200	302	211	203.5	467	233.5	250	97	28	107.5




B7$_{DS}$

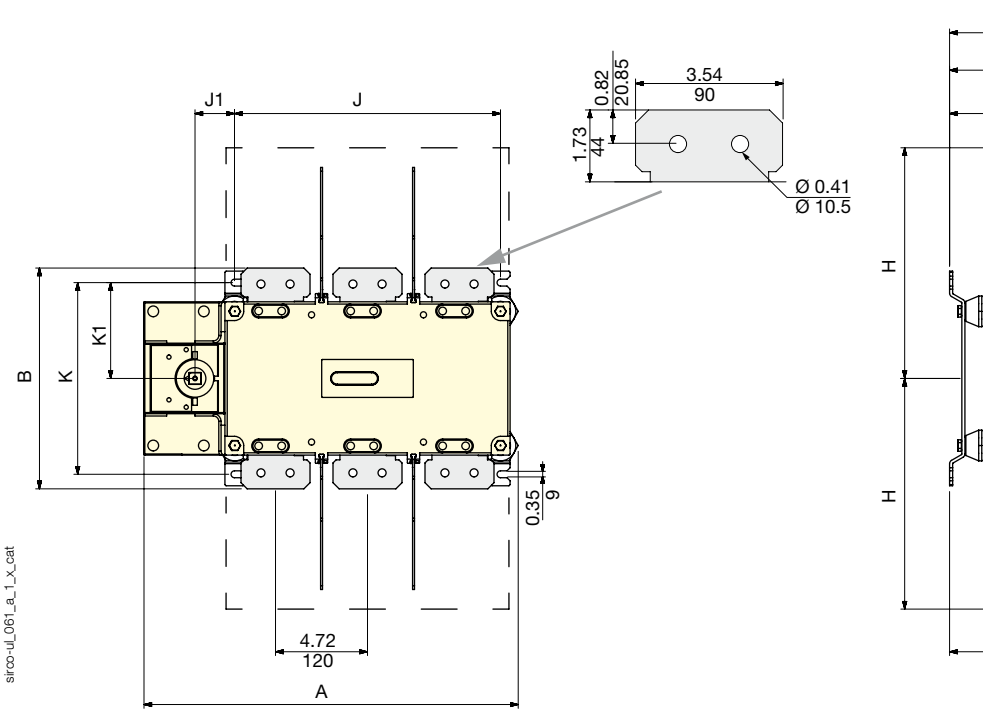




Frame size	No. of poles	Unit	A	B	C	H	H1	J	J1	K	K1	Y	Y1
B7$_{DS}$	8 P	inches	23.95	11.33	13.11	11.85	15.31	18.38	2.02	9.84	4.92	4.23	11.55
		mm	608.5	288	333	301	389	467	51.5	250	125	107.5	293.5

Dimensions for external handles (in/mm)




B4 - $B4_{DS}$ - B5

Handle type	Front operation Direction of operation	Door drilling
S2 type 		




$B5_{DS}$ - B6

Handle type	Front operation Direction of operation	Door drilling
S3 type 		

B7

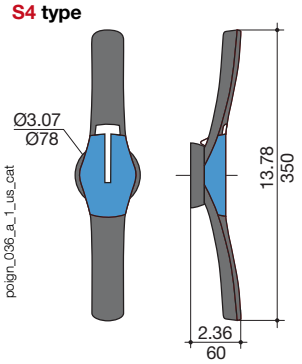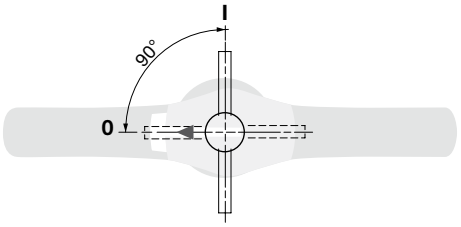Handle type	Front operation Direction of operation	Door drilling
S4 type 		


B6DS - B7DS

Handle type	Front operation Direction of operation	Door drilling
V1 type 		

Bridging bars (in/mm)


B4 - B4$_{DS}$

2709 1020

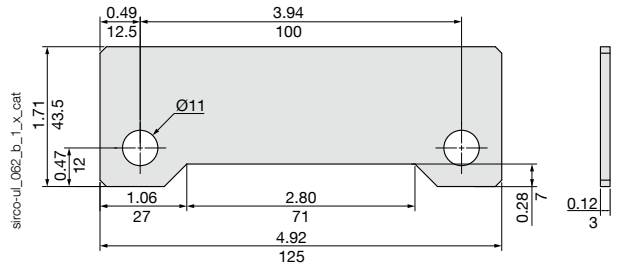


B5 - B5$_{DS}$

2709 1041

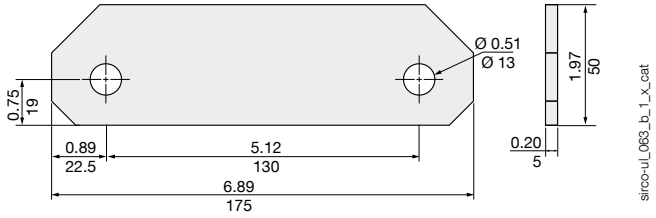


B6 - B6$_{DS}$


2709 0062

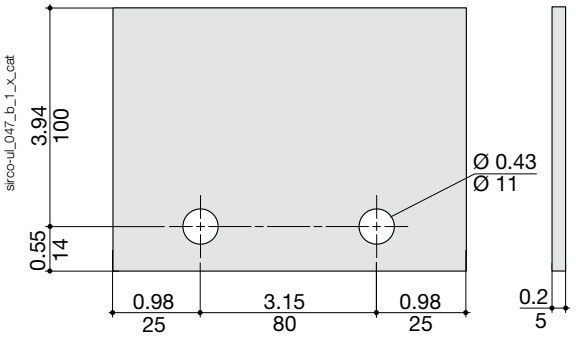


2709 0045

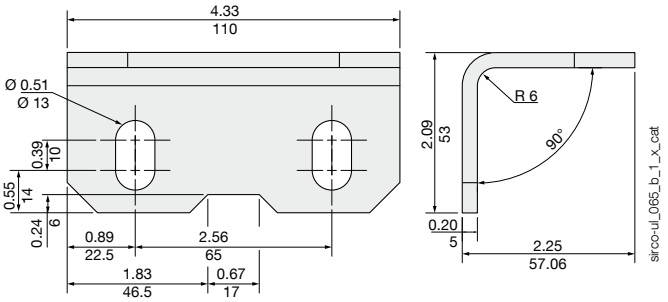


2709 0027



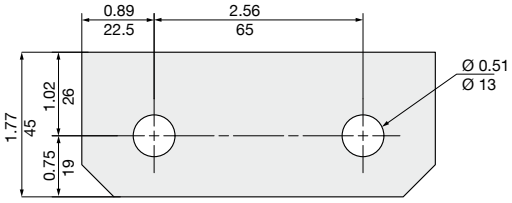


B7

2709 0081

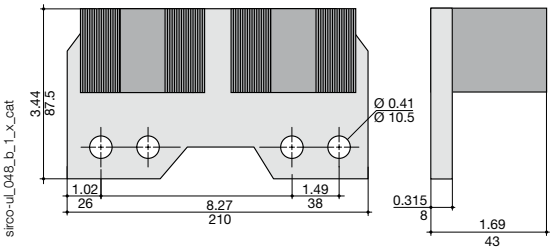


B7 - B7$_{DS}$

2709 0121

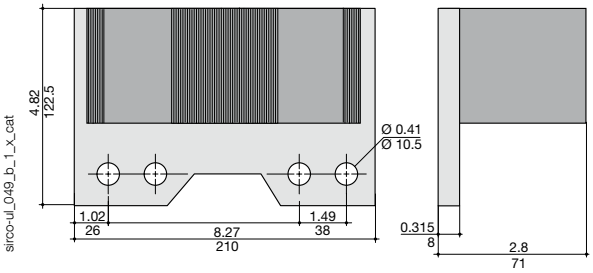


Mounting orientation


All frames



$B4_{DS}$ - $B5_{DS}$




$B6_{DS}$ - $B7_{DS}$




Terminal lugs (in/mm)

100 to 250 A

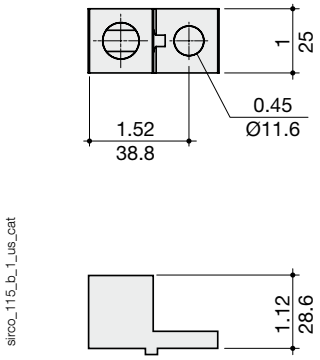


300MCM

100 to 250 A

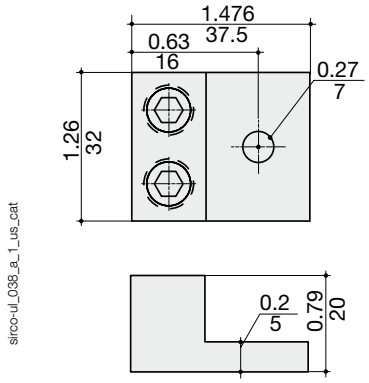


2/0

400 A

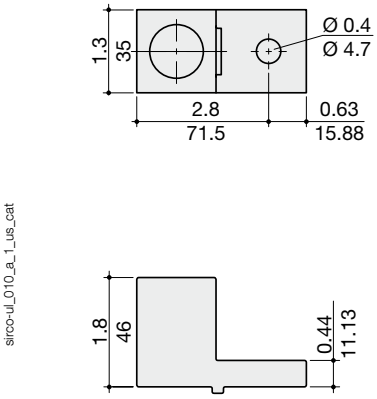


600MCM

400 A

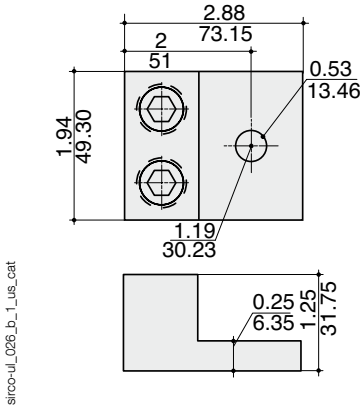

2 x 350MCM

600 to 2000 A

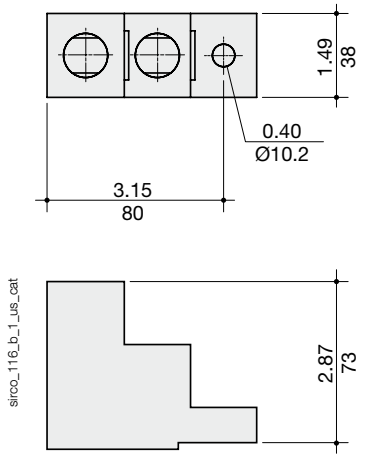

2 x 600MCM