LINEAR HALL EFFECT FINGER JOYSTICK

2 & 4-WAY LINEAR HALL EFFECT FINGER JOYSTICK



HTL4 with Castle Style Button

The HTL series provides all of the performance of a full size, dual axis joystick in a miniature package that can be mounted in control handles, armrests and panels. The Hall effect sensors are immune to electromagnetic and radio frequency interference up to 100V/M. Programmable sensors with built-in temperature compensation ensure consistent and repeatable operation. The HTL series has excellent tactile feel for improved operator control and is available with either dusttight or IP68S watertight seal. A wide variety of output configurations are available to satisfy different applications.

Features:

- **Designed for grip, armrest & panel mounting**
- **Proven contactless analog output Hall effect technology**
- **Redundant outputs available**
- **1 million cycles**
- **Electronics watertight to IP68S**
- **Outstanding EMI/RFI immunity**
- **Variety of button styles**
- **RoHS/WEEE/Reach compliant**

Standard Characteristics/Ratings:

MECHANICAL:

Mechanical Life:	1,000,000 all directions
Travel Angle:	23° min to 27° max
Operating Force with Boot:	16 oz typical to 20 oz max (at top of button) @ 25°C
Max Allowable Vertical & Radial Force on Button:	25.0 lbs.
Max Allowable Torque on Button:	7.5 lbs.

ELECTRICAL RATINGS:

HTL2: Rated at Vcc = 5V @ 20°C Load = 1mA (4.7KΩ)

Electrical	Units	Min	Typ	Max
Supply Voltage	VDC	4.5	5	5.5
Output Voltage Tolerance at Center *(see graph for output values)*	VDC @ 5V Vcc	-0.25	N/A	+0.25
Output Voltage Tolerance at Full Travel *(see graph for output values)*	VDC @ 5V Vcc	-0.25	N/A	+0.25
Supply Current per Sensor	mA	N/A	N/A	10
Output Source Current	mA	-1	N/A	1
Output Resistance (Io ≤ 2mA)	Ω	N/A	1	10

HTL4: Rated at Vcc = 5V @ 20°C Load = 1mA (4.7KΩ)

Electrical	Units	Min	Typ	Max
Supply Voltage	VDC	4.5	5	5.5
Output Voltage Tolerance at Center *(see graph for output values)*	VDC @ 5V Vcc	-0.25	N/A	+0.25
Output Voltage Tolerance at Full Travel *(see graph for output values)*	VDC @ 5V Vcc	-0.25	N/A	+0.25
Supply Current per Sensor	mA	N/A	8	10
Output Source Current Limit	mA	-1	N/A	+1

ELECTRONICS

Seal Integrity:	Electronics IP68S

ENVIRONMENTAL:

Operating Temp Range:	-40°C to +85°C
Storage Temp Range:	-40°C to +85°C
RFI:	Withstand 100V/M, 14Hz to 1GHz
EMI:	Withstand per MIL-STD-461D/SAE J1113-22 at 50Hz and 60Hz

MATERIALS:

Boot:	Elastomer
Button:	Thermoplastic, black
Case:	Thermoplastic, black
Flange:	Thermoplastic, black
Wires:	22 or 24 AWG
Mounting Hardware:	Panel fastener assembly

LINEAR HALL EFFECT FINGER JOYSTICK

2 & 4-WAY LINEAR HALL EFFECT FINGER JOYSTICK

HTL2 PART NUMBER CODE

HTL2 – X X X X 1 X XX X X

Button Style	Case Style	Seal	Travel	Operating Force	Output 1 ①	Output 2 ②	Termination	Button Color
1. Castle	**1.** 0.970" SQ.	**1.** Dusttight	**1.** 25°	**1.** 16 oz	**AA.** 2.5 +/- 2.0VDC	NONE	**1.** Wire Leads 22 AWG, UL 1569	**2.** Black
2. External Castle Boot		**2.** Watertight *			**BB.** 2.5 +/- 2.0VDC	2.5 +/- 2.0VDC	**2.** Pins	
3. Short Double Stadium					**CC.** 2.5 +/- 2.0VDC	2.5 -/+ 2.0VDC	**3.** Wire Leads 24 AWG, SAE AS22759	
4. Tall Concave Stadium					**DD.** 2.5 +/- 1.5VDC	NONE		
5. External Bat Handle Boot					**EE.** 2.5 +/- 1.5VDC	2.5 +/- 1.5VDC		
6. External Smooth Boot					**FF.** 2.5 +/- 1.5VDC	2.5 -/+ 1.5VDC		
7. Long Concave Y Axis Button					**GG.** 0.5 - 4.5VDC	0.5 - 4.5VDC		
8. Low Profile Button					**HH.** 1.0 - 4.0VDC	1.0 - 4.0VDC		

***** Watertight sealed option available with button styles 2, 5 and 6.

① Outputs are from the center to the full travel position. Options "AA," "BB," "CC," "DD," "EE," and "FF" provide increased voltage in +Y; and decreasing voltage in -Y direction from one output per axis. Options "GG" and "HH" provide increasing voltages in all directions (+Y, -Y) from 2 outputs per axis.

② Options "BB" and "EE" provide redundant output 2 which duplicates output 1. Options "CC" and "FF" provide redundant output 2 which is inverse of output 1.

HTL4 PART NUMBER CODE

HTL4 – X X X X X X XX X X

Button Style	Case Style	Seal	Travel	Gating	Operating Force	Output 1 ①	Output 2 ②	Termination	Button Color
1. Castle	**1.** 0.970" SQ.	**1.** Dusttight	**1.** 25°	**1.** Omnidirectional; Square on Axis Guided Feel**	**1.** 16 oz	**AA.** 2.5 +/- 2.0VDC	NONE	**1.** Wire Leads 22 AWG UL 1569	**2.** Black
2. External Castle Boot		**2.** Watertight *		**2.** Gated; Dual Axis Return to Center		**BB.** 2.5 +/- 2.0VDC	2.5 +/- 2.0VDC	**2.** Pins	
3. Short Double Stadium				**3.** Omnidirectional; Round: Smooth Feel		**CC.** 2.5 +/- 2.0VDC	2.5 -/+ 2.0VDC	**3.** Wire Leads 24 AWG SAE AS22759	
4. Tall Concave Stadium						**DD.** 2.5 +/- 1.5VDC	NONE	**4.** Wire Leads 22 AWG, UL 1569 shared powers and grounds (see schematic)	
5. External Bat Handle Boot						**EE.** 2.5 +/- 1.5VDC	2.5 +/- 1.5VDC	**5.** Wire Leads 24 AWG, SAE AS22759 shared powers and grounds (see schematic)	
6. External Smooth Boot						**FF.** 2.5 +/- 1.5VDC	2.5 -/+ 1.5VDC		
7. Long Concave Y Axis Button						**GG.** 0.5 - 4.5VDC	0.5 - 4.5VDC		
						HH. 1.0 - 4.0VDC	1.0 - 4.0VDC		

***** Watertight sealed option available with button styles 2, 5 and 6.

① Outputs are from the center to the full travel position in each direction. Options "AA," "BB," "CC," "DD," "EE," and "FF" provide increased voltage in +X, +Y; and decreasing voltage in -X, -Y direction from one output per axis. Options "GG" and "HH" provide increasing voltages in all directions (+X, +Y, -X, -Y) from 2 outputs per axis.

② Options "BB" and "EE" provide redundant output 2 which duplicates output 1. Options "CC" and "FF" provide redundant output 2 which is inverse of output 1.

**Positive tactile feel when moved off X and Y axis positions.

Gating Icons



Omnidirectional
Square On-Axis-
Guided Feel***



Gated
Dual Axis
Return to Center



Omnidirectional
Round
Smooth Feel



Single Axis
(HTL2 version)

***Feel defined by shading.

Specifications Subject To Change Without Notice

LINEAR HALL EFFECT FINGER JOYSTICK

2 & 4-WAY LINEAR HALL EFFECT TOGGLE



PINS NOT PRESENT
IN ALL CONFIGURATIONS





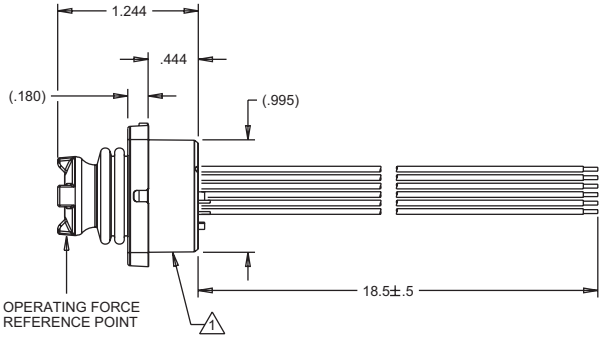

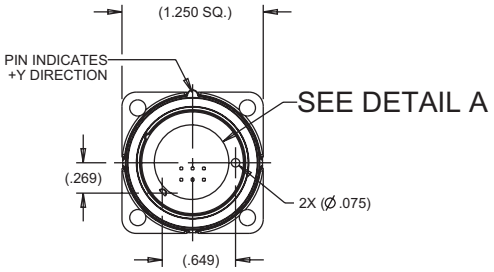

HTL2 FOOTPRINT

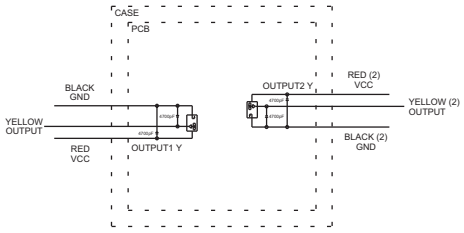



SUGGESTED PANEL
OPENING

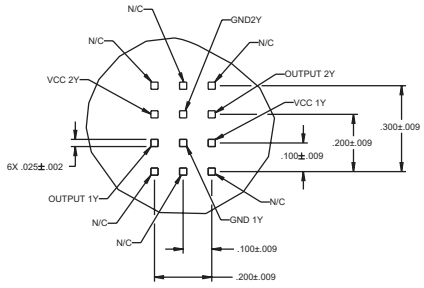

DETAIL A
ALL PINS NOT PRESENT
IN ALL CONFIGURATIONS

HTL4 FOOTPRINT

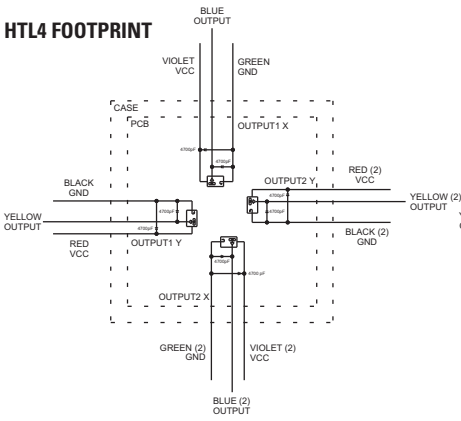

TERMINATION STYLE 1, 2, AND 3

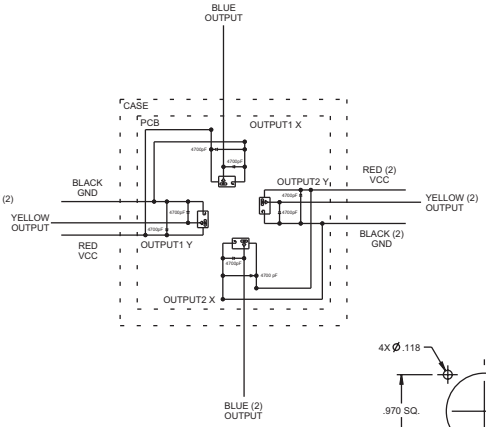

TERMINATION STYLE 4 AND 5



SUGGESTED PANEL
OPENING

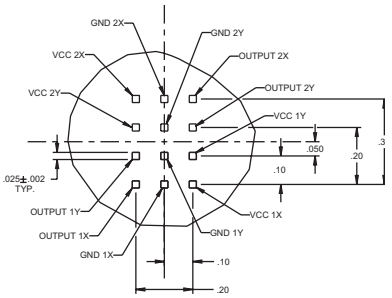

DETAIL A
ALL PINS NOT PRESENT
IN ALL CONFIGURATIONS

ALL WIRES NOT PRESENT IN ALL CONFIGURATIONS
OUTPUT 2 NOT PRESENT IN ALL CONFIGURATIONS

2 & 4-WAY LINEAR HALL EFFECT TOGGLE

HTL4 OUTPUTS

OPTION AA

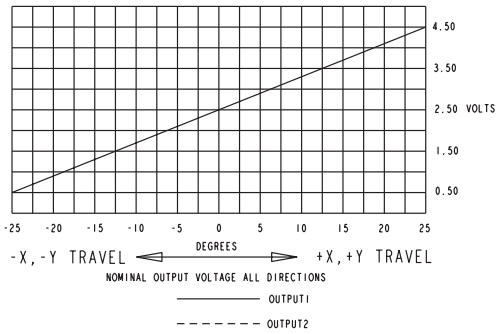

OPTION BB

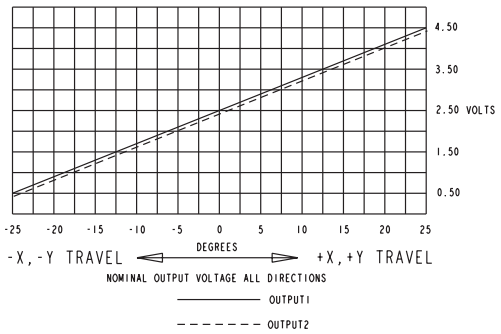

OPTION CC

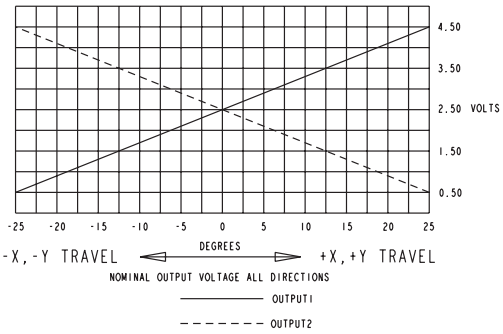

OPTION DD

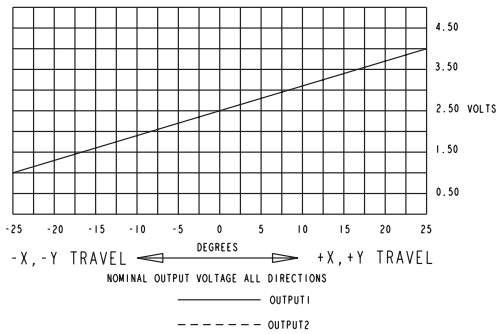

OPTION EE

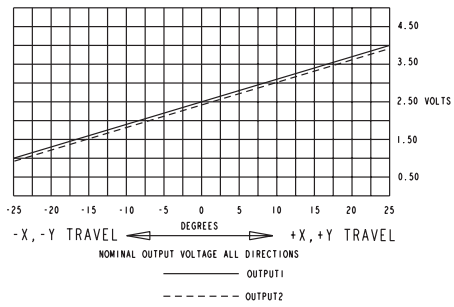

OPTION FF

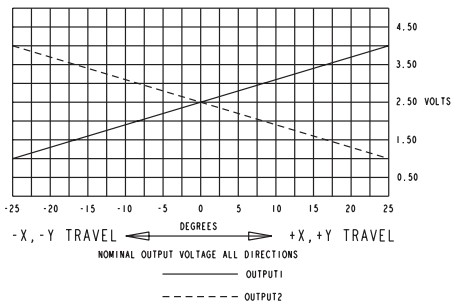

OPTION GG

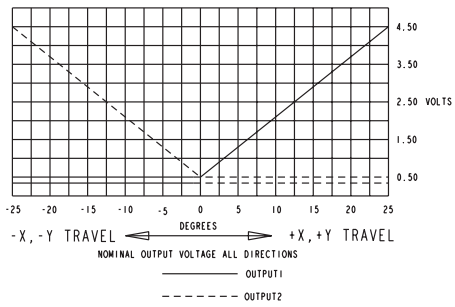

OPTION HH

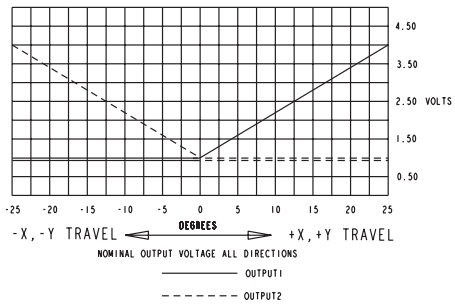

LINEAR HALL EFFECT FINGER JOYSTICK

BUTTON STYLES





BUTTON STYLE 1
(CASTLE)





BUTTON STYLE 2
(EXTERNAL CASTLE BOOT)





BUTTON STYLE 3
(SHORT DOUBLE STADIUM)





BUTTON STYLE 4
(TALL CONCAVE STADIUM)





BUTTON STYLE 5
(EXTERNAL BAT
HANDLE BOOT)





BUTTON STYLE 6
(EXTERNAL SMOOTH BOOT)





BUTTON STYLE 7
(LONG CONCAVE Y AXIS BUTTON)





BUTTON STYLE 8
(LOW PROFILE BUTTON)
(AVAILABLE FOR HTL2 ONLY)

Specifications Subject To Change Without Notice