
PG2453

PG-025-REB12-MFRKG/US/ /P

Pressure sensors

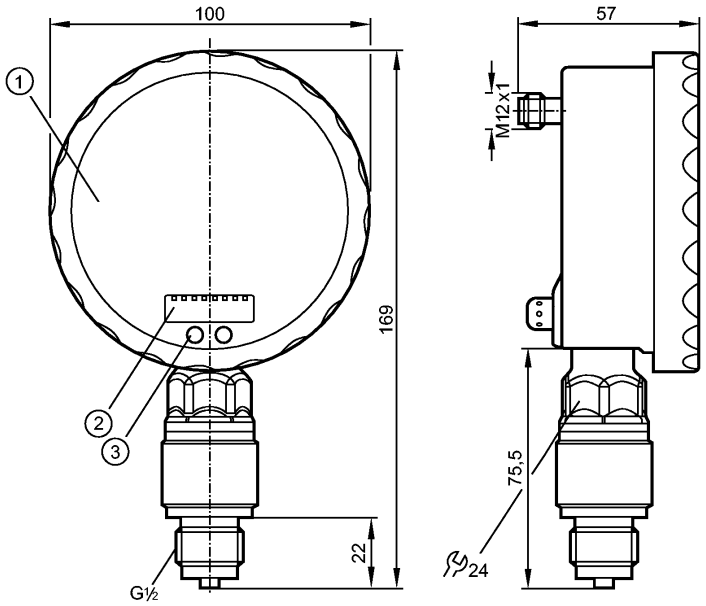

1: Analogue display
2: 4-digit alphanumeric display
3: Touch button (programming button)

Made in Germany

Product characteristics			
Electronic pressure sensor with analogue display			
Connector			
Analogue display 0...350° rotatable			
Resolution 0.25%			
Pointer not visible when unit disconnected			
Process connection: G ½			
2 outputs OUT1 = switching output OUT2 = analogue output			
analogue display, 4-digit alphanumeric display			
Measuring range: -1...25 bar / -14.5...362.5 psi			
Application			
Application		Type of pressure: relative pressure Liquids and gases	
Pressure rating		100 bar	1450 psi
Bursting pressure min.		300 bar	5070 psi
Medium temperature	[°C]	-25...80	
Electrical data			
Electrical design		DC PNP/NPN	
Operating voltage	[V]	18...32 DC	
Current consumption	[mA]	70; (24 V)	
Insulation resistance	[MΩ]	> 100 (500 V DC)	
Protection class		III	
Reverse polarity protection		yes	
Outputs			

efectorsoo

PG2453

PG-025-REB12-MFRKG/US/ /P

Pressure sensors

Output		2 outputs OUT1 = switching output OUT2 = analogue output	
Output function		1 x normally open / closed programmable + 1 x analogue (4...20 / 20...4 mA, scalable)	
Current rating	[mA]	250	
Voltage drop	[V]	< 2	
Short-circuit protection		pulsed	
Overload protection		yes	
Switching frequency	[Hz]	75	
Analogue output		I: 4...20 mA (Ineg: 20...4 mA)	
Max. load	[Ω]	I / Ineg: max. (Ub - 10 V) x 50	
Measuring / setting range			
Measuring range		-1...25 bar	-14.5...362.5 psi
Setting range			
Set point, SP		-0.90...40.00 bar	-13.0...580.0 psi
Reset point, rP		-1.00...39.90 bar	-14.5...578.5 psi
Analogue start point, ASP		-1.00...33.75 bar	-14.5...489.5 psi
Analogue end point, AEP		5.25...40.0 bar	76.0...580.0 psi
in steps of		0.05 bar	0.5 psi
Accuracy / deviations			
Accuracy / deviations (in % of the span) Turn down 1:1			
Switch point accuracy		< ± 0.5	
Characteristics deviation *)		< ± 0.25 (BFSL) / < ± 0.5 (LS)	
Hysteresis		< ± 0.25	
Repeatability **)		< ± 0.1	
Long-term stability ***)		< ± 0.1	
Temperature coefficients (TEMPCO) in the temperature range 0...70° C (in % of the span per 10 K)			
Greatest TEMPCO of the zero point		< ± 0.2	
Greatest TEMPCO of the span		< ± 0.2	
Reaction times			
Power-on delay time	[s]	6	
Min. response time switching output	[ms]	9	
Damping for the switching output (dAP)	[s]	0.01...30	
Damping for the analogue output (dAA)	[s]	0.01...30	
Step response time analogue output	[ms]	28	
Integrated watchdog		yes	
Environment			
Ambient temperature	[°C]	-20...80	
Storage temperature	[°C]	-40...100	
Protection		IP 67 / IP 69K	
Tests / approvals			
EMC		EN 61000-4-2 ESD: EN 61000-4-3 HF radiated:	4 kV CD / 8 kV AD 10 V/m

		EN 61000-4-4 Burst: EN 61000-4-5 Surge: EN 61000-4-6 HF conducted:	2 kV 0.5/1 kV 10 V
Shock resistance		DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance		DIN IEC 68-2-6:	20 g (10...2000 Hz)
MTTF	[Years]	103	

Mechanical data

Process connection		G ½	
Materials (wetted parts)		ceramics (Al2 O3); FPM; stainless steel 316L / 1.4404	
Housing materials		stainless steel 316L / 1.4404; PA; FPM (Viton); PTFE; viewing glass: laminated safety glass 4 mm	
Switching cycles min.		100 million	
Weight	[kg]	0.609	

Displays / operating elements


Display		Display unit Switching status Switch points Function display Measured values	2 x LED green LED yellow LED ring 4-digit alphanumeric display analogue display, 4-digit alphanumeric display
Extended display range (max.)		40 bar	580 psi


Electrical connection

Connection		M12 connector; Gold-plated contacts

Wiring







Remarks

Remarks		*) BFSL = Best Fit Straight Line switch point accuracy in the extended display range: 1.5 % of the span **) with temperature fluctuations < 10 K ***) in% of the span / 6 months
Pack quantity	[piece]	1