PERFORMANCE MADE SMARTER



2-wire level transmitter

5343A


– Potentiometer or Ohmic input
– Programmable sensor error value
– High measurement accuracy
– Unique process calibration function
– Programmable via standard PC

Application
- Conversion of resistance variation to standard analog current signals, e.g. from Ohmic level sensors or valve positions.
- User-defined linearization function can be activated.

Technical characteristics
- Within a few seconds the user can program PR5343A to measure within the defined Ohmic values.
- Continuous check of vital stored data for safety reasons.
- The transmitter is protected against polarity reversal.
- PR5343A is configured to the current task by way of a PC, the PReset software and the communications interface Loop Link.
- The PRelevel configuration tool included in the PReset software has been developed specifically for the configuration of level applications. Among other things, it contains a function for ”on line” measurement of input span as well as a linearization function for volume linear output from horizontal cylindrical tanks.

Mounting / installation
- For DIN form B sensor head or DIN rail mounting with a special fitting.

Connections

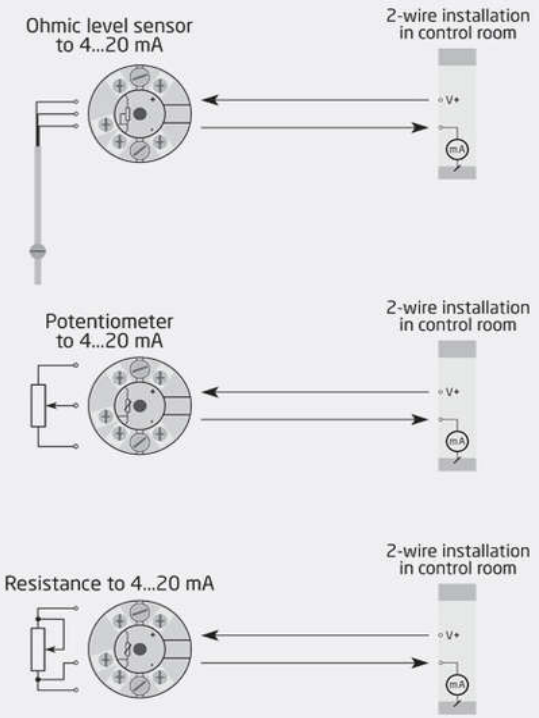

This page is automatically generated on the basis of information provided on www.prelectronics.com and affiliated websites. It is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability

Order:

Type
5343A

Environmental Conditions

Specifications range	-40°C to +85°C
Calibration temperature	20...28°C
Relative humidity	< 95% RH (non-cond.)
Protection degree (encl./terminal)	IP68 / IP00

Mechanical specifications

Dimensions	Ø 44 x 20.2 mm
Weight approx.	50 g
Wire size	1 x 1.5 mm^2 stranded wire
Screw terminal torque	0.4 Nm
Vibration	IEC 60068-2-6 : 2007
Vibration: 2...25 Hz	±1.6 mm
Vibration: 25...100 Hz	±4 g

Common specifications

Supply

Supply voltage	8.0...35 VDC

Response time

Response time (programmable)	0.33...60 s
Internal consumption	25 mW…0.8 W
Voltage drop	8.0 VDC
Warm-up time	5 min.
Programming	Loop Link
Signal / noise ratio	Min. 60 dB
Accuracy	Better than 0.1% of selected range
Signal dynamics, input	19 bit
Signal dynamics, output	16 bit
Effect of supply voltage change	< 0.005% of span / VDC
EMC immunity influence	< ±0.5% of span

Input specifications

Common input specifications

Max. offset	50% of selected max. value

Linear resistance input

Measurement range / min. range (span)	0...100 kΩ / 1 kΩ
Cable resistance per wire (max.)	100 Ω
Sensor current	> 25 µA, < 120 µA
Effect of sensor cable resistance (3-wire)	< 0.002 Ω / Ω
Sensor error detection, lin. R	Yes
Min. measurement range	1 kΩ

Output specifications

Current output

Signal range	4…20 mA
Min. signal range	16 mA
Load (@ current output)	≤ (Vsupply - 8) / 0.023 [Ω]
Load stability	≤ 0.01% of span / 100 Ω
Sensor error indication	Programmable 3.5…23 mA
NAMUR NE 43 Upscale/Downscale	23 mA / 3.5 mA

Common output specifications

Updating time	135 ms
*of span	= of the presently selected range

Observed authority requirements

EMC	2014/30/EU

Approvals

ATEX 2014/34/EU	KEMA 10ATEX0004 X
IECEx	DEK 13.0036X
INMETRO	DEKRA 13.0002 X
EAC	TR-CU 020/2011
DNV-GL Marine	Stand. f. Certific. No. 2.4
GL	V1-7-2