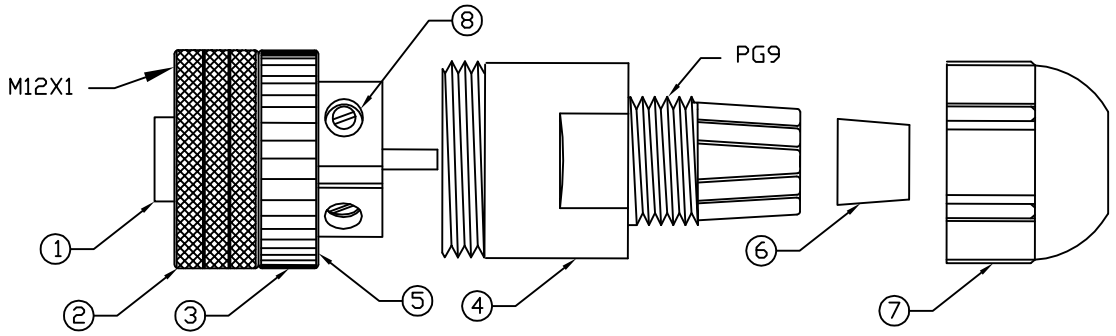

NOTES:

MATERIALS:

MOLDED BODY:	BLACK POLYAMIDE
COUPLING NUT:	NI PLATED BRASS
COMPRESSION NUT:	BLACK POLYAMIDE
GROMMETT	NITRILE RUBBER
CONTACTS:	GOLD/NICKEL OVER COPPER ALLOY
INSERT:	BLACK NYLON
INSERT HOUSING:	BLACK POLYAMIDE
SET SCREWS:	NI PLATED BRASS

ELECTRICAL:

CURRENT RATING:	4AMP MAX
VOLTAGE RATING:	250V

MECHANICAL:

TEMPERATURE RANGE:	-20° TO 80°C
INGRESS PROTECTION:	IP 67

AGENCY CERTIFICATIONS:

AGENCY:	cCSAus FILE LR6837

TABLE 2 - COMPONENT INFORMATION

ITEM	QTY	DESCRIPTION
1	1	INSULATOR
2	1	COUPLNG NUT
3	1	INSERT BODY
4	1	CONNECTOR BODY
5	1	O-RING
6	1	GROMMET
7	1	COMPRESSION NUT
8	4	SCREW, M3 x 5

UPDATE PER JM
EC NO: WNA2009-0313 2008/10/27
DRWN: LHARTMAN 2008/11/07
CH'KD: VOU
APPR: JFMURPHY 2008/11/10
DESCRIPTION
B
REV

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±---	±.010
1 PLACE	±---	±.020
ANGULAR ±1°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: ----
SCALE: 1:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY LHARTMAN DATE 2008/10/27
CHECKED BY VOU DATE 2008/10/27
APPROVED BY JFMURPHY DATE 2008/10/27

TITLE: MICRO-CHANGE FIELD ATTCH 4 POLE FEMALE ST FF PG9 FITTING SCREW

MOLEX INCORPORATED

MATERIAL NO. 1200710036
DOCUMENT NO. SD-130044-003
SHEET NO. 1 OF 1
SIZE A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION