

Inductive sensor
Ni50U-CK40-AP6X2-H1141 W/BS4

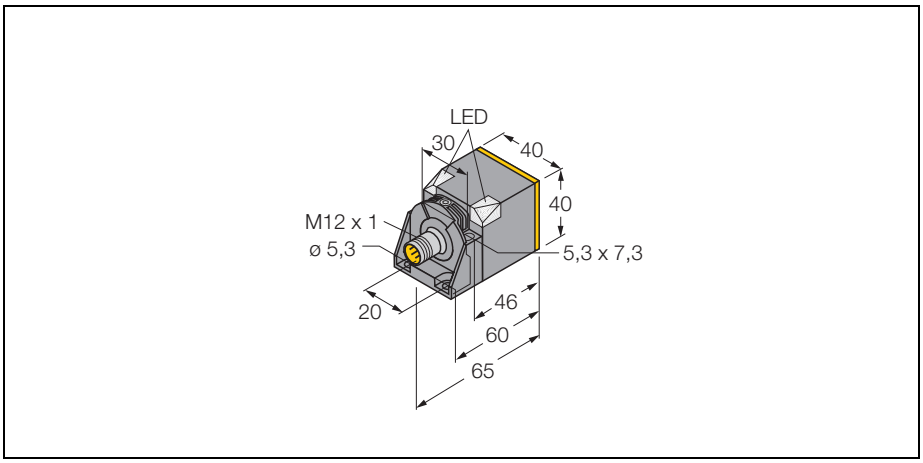

Type	Ni50U-CK40-AP6X2-H1141 W/BS4
Ident-No.	1625868
Rated operating distance Sn	50 mm
Mounting condition	non-flush, flush mounting possible
Assured sensing range	≤ (0,81 x Sn) mm
Repeatability	≤ 2 %
Temperature drift	≤ ± 10 %
	≤ ± 20 %, ≤ -25 °C v ≥ +70 °C
Hysteresis	3… 15 %
Ambient temperature	-30…+ 85 °C
Operating voltage	10… 30VDC
Residual ripple	≤ 10 % U_{ss}
DC rated operational current	≤ 200 mA
No-load current I_0	≤ 15 mA
Residual current	≤ 0.1 mA
Rated insulation voltage	≤ 0.5 kV
Short-circuit protection	yes / cyclic
Voltage drop at I_e	≤ 1.8V
Wire breakage / Reverse polarity protection	yes / complete
Output function	3-wire, NO, pnp
Insulation class	⧈
Switching frequency	≤0.25kHz
Housing	rectangular, CK40
Dimensions	65 x 40 x 40 mm
	variable orientation of active face in 5 directions
Housing material	plastic, PBT-GF20-V0, black
Material active face	plastic, PA6-GF30-X, yellow
Connector housing	metal, CuZn, nickel-plated
Connection	Connectors, M12 x 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30g (11 ms)
Degree of protection	IP68
Operating voltage display	2 x LEDs green
Display switch state	2 x LED yellow
Included in scope of supply	BS4-CK40

- **Rectangular, height 40 mm**
- **Variable orientation of active face in 5 directions**
- **Plastic, PBT-GF30-V0**
- **High luminance corner LEDs**
- **Optimum visibility of operating-voltage display and switching state in any installation position**
- **Factor 1 for all metals**
- **extended switching distance**
- **Degree of protection IP68**
- **Magnetic field immune**
- **Predamping protection through self-compensation**
- **partial embedding possible**
- **3-wire DC, 10…30 VDC**
- **normally open, pnp output**
- **connector, M12 x 1**

Wiring diagram

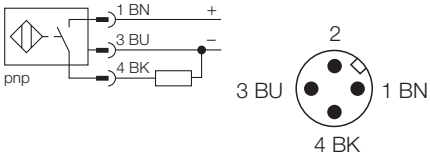

Functional principle


Inductive sensors are designed for wear-free and non-contact detection of metal objects. uprox+ sensors have considerable advantages due to their patented multi-coil system. They excel in highest switching distances, maximum flexibility and operational reliability as well as efficient standardisation.


• Edition: • 11.08.2009


This Document Was Officially Certified By TURCK Inc. On 8/11/2009 2:00:45 PM


Inductive sensor
Ni50U-CK40-AP6X2-H1141 W/BS4


Mounting instructions	minimum distances
Distance D	240 mm
Distance W	105 mm
Distance S	60 mm
Distance G	300 mm
Distance N	30 mm
Width of the active face B	40 mm






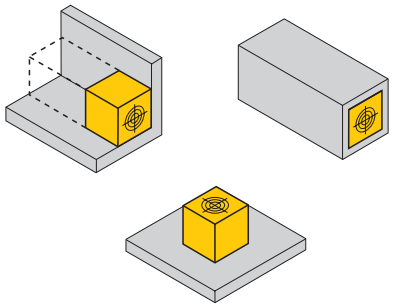







Up to 4-side flush mounting possible
1-side mounting: Sr = 35 mm; D = 240 mm
mounting 2-side: Sr = 25 mm; D = 240 mm
mounting 3-side: Sr = 20 mm; D = 80 mm
mounting 4-side: Sr = 15 mm; D = 60 mm

back-mounting as well as recessed mounting with switching distance reduction possible

recessed sensor mounting on metal:
x = 10 mm: Sr = 20 mm
x = 20 mm: Sr = 20 mm
x = 30 mm: Sr = 20 mm
x = 40 mm: Sr = 20 mm

cantilever sensor on metal:
y = 10 mm: Sr = 40 mm
x = 20 mm: Sr = 50 mm
y = 30 mm: Sr = 40 mm
x = 20 mm: Sr = 50 mm


mounting in aperture plate:
T = 150 mm:
sensor with twisted turning angle
on metal base Sr = 50 mm
based on metal and one-side embedding Sr = 25 mm
based on metal and two-side embedding Sr = 15 mm
based on metal and three-side embedding Sr = 12 mm

The values stated relate to 1 mm thick steel plate.

• Edition: • 11.08.2009

This Document Was Officially Certified By TURCK Inc. On 8/11/2009 2:00:45 PM

Accessories

Type code	Ident-No.	Short text	Dimension drawing
BSS-CP40	6901318	fixing clamp; material: polypropylene	

• Edition: • 11.08.2009

This Document Was Officially Certified By TURCK Inc. On 8/11/2009 2:00:45 PM