sifam tinsley
PRECISION INSTRUMENTATION

MULTIFUNCTION METER
ND40
www.sifamtinsley.co.uk

CE

DATASHEET Issue 1.0



Electrical Safety CAT III

Multifunction Meters

Transducers & Isolators

Temperature Controllers

Converters & Recorders

Digital Panel Meters

Current Transformers

Analogue Panel Meters

Shunts

Digital Multimeters

Clamp Meters

Insulation Testers

ND40

POWER NETWORK ANALYZER / RECORDER

Features

- Measurement and recording of over 500 electric energy quality parameters acc. to EN 50160, EN 61000-4-30, EN 6100-4-7 standards
- Measuring class A - for 3 second aggregation. 10 minute and 2 hour aggregation - class S
- Operation in 3 or 4-wire, 3-phase, balanced or unbalanced power networks
- Analysis of current and voltage harmonics up to the 51 st for class I (acc. to EN 61000-4-7)
- Configurable archives of actual values and event recording
- Data archiving on an SD card - memory up to 32 GB
- Web Server, FTP Server
- Interfaces: RS-485 Modbus Slave, Ethernet 100 Base-T (Modbus TCP Server), USB Device & Host
- Colour touch screen: LCD TFT 5.6", 640 x 480 pixels
- IP65 protection grade from the frontal side
- Synchronization of RTC clock with the NTP time server.

SUBJECT TO CHANGE WITHOUT NOTICE
This manual superseded all previous versions – please keep for future reference

Example of Application

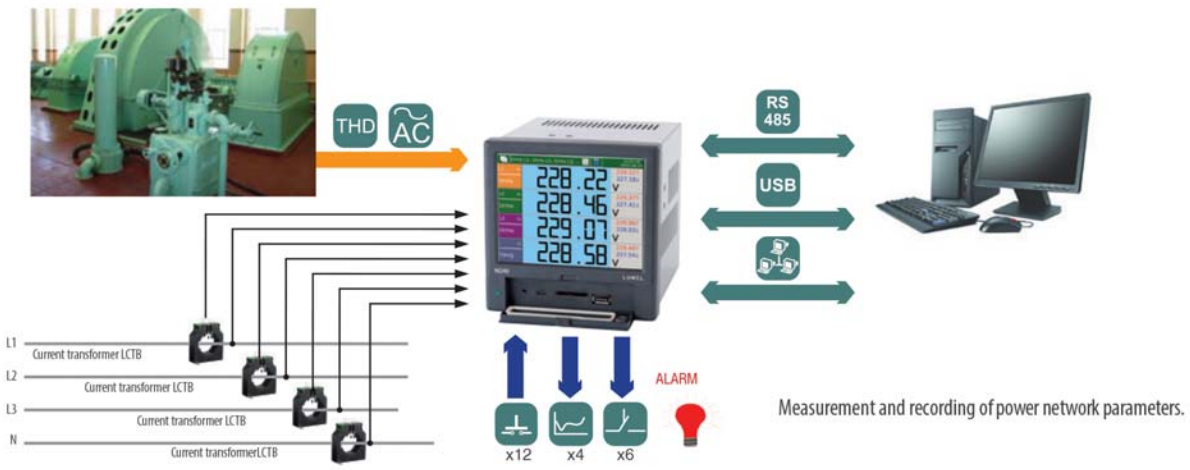

Measurement and Visualization of Power Network Parameters

Aggregated values for 3 seconds, 10 minutes and two hours:

- Phase voltages U_1, U_2, U_3, U_{123}avg
- Phase current I_1, I_2, I_3, I_{123}avg
- Active phase powers P_1, P_2, P_3, ΣP_{123}, P_{123}avg
- Reactive phase powers Q_1, Q_2, Q_3, ΣQ_{123}, Q_{123}avg
- Apparent phase powers S_1, S_2, S_3, ΣS_{123}, S_{123}avg
- Active power factors PF_1, PF_2, PF_3, PF_{123}avg
- Power factor distortion dPF_1, dPF_2, dPF_3, dPF_{123}avg
- Reactive/active power factors $tg\varphi_1$, $tg\varphi_2$, $tg\varphi_3$, $tg\varphi_{123}$avg
- Phase-to-phase voltages U_{12}, U_{31}, U_{23}, U_{123}avg
- Current in neutral wire In
- The angle between the voltage and current φ_1, φ_2, φ_3, φ_1, φ_{123}avg (degrees and radians)
- Voltage phase-to-phase angle $\sphericalangle U_{12}$, $\sphericalangle U_{31}$, $\sphericalangle U_{23}$, $\sphericalangle U_{123}$avg

Other parameters:

- Frequency (aggregation for 1 and 10 seconds)
- Temperature/ resistance values (two channels)
- Demand values: P, Q , S , U , I (15-minute, 30-minute or 1 hour)
- Energy: active imported/exported, reactive imported/exported and apparent
  All energies are calculated for each phase and 3-phase parametres
- Factors: THD, THDS, THDG, PWHD. Calculated for currents and voltages of each phase and 3-phase parameters
- Harmonics from 1 up to 51st for each phase of currents and voltages
- The half wave voltage of each phase
- Recording of dips, swells and overvoltages
- Storage of minimun and maximum of measured values.

Features



Inputs



Outputs



Galvanic Isolation



Technical Data

Inputs

Input type	Measuring range	Parameters	Basic error
Voltage input	230/400 V	0.05..1.2 Un	± 0.1%
Current input	1A or 5A	0.005..1.2 In	± 0.1%
Logic input	6 logic inputs: 0/5..24 V d.c.	switching frequency up to 50 Hz	

Outputs

Output type	Properties
Analog output	3 programmable current outputs 0/4...20 mA, load resistance < 500 Ω
Relay output	8 programmable electromagnetic relays, voltageless NO contacts, load capacity 250 V a.c./1 A a.c.

Digital Interfaces

Interface type	Properties
RS-485	2 interfaces: MODBUS Slave and Master, baud rate 300...115200 bit/s, transmission mode ASCII/RTU
USB	2 interfaces: Device & Host, USB v.2.0
Ethernet	10 Base-T, RJ45 socket, Modbus TCP Server

Rated Operating Conditions

Supply voltage	85 V..240 V a.c., 40...400Hz	90 V..320 V d.c.	power consumption: 15 VA , 35 VA (when loading)
Ambient temperature	work: 0 up to 50°C		storage: - 20...50°C
Relative humidity	< 75%		Condensation inadmissible
Reaction against	supply decays supply recovery		Data and device state preservation Continuation of device work
Short term load (5s)	2 Un (max. 1000 V)		10 In
Casing protection grade	IP 65		
Safety requirements	Installation category III Pollution grade 2		EN 61010-1
Maximum phase-to-earth operating voltage	RS485, temperature/resistance input, USB: 50V measuring circuit, relays, supply: 300 V		EN 61010-1 Measuring ranges

Measuring Ranges and Admissible Basic Conversion Errors

Measuring quantity	Measurement method	Range	Basic error
Voltage U RMS	U RMS averaged values: 1 s class: B 3 s class: A 10 min class: S 2 hrs class: S	U RMS L-N (150% Un) Un = 230 V - 23.0..46..345.0 V (Ku=1) ..480.0 kV (Ku≠1) U RMS L-L (150% Un): Un = 400 V - 40.0..80.. 600.0 V (Ku=1) ..1020.0 kV (Ku≠1)	class A acc. to EN 61000-4-30:2008 U RMS L-N (10% Udin - 150% Udin): ±0.1% Udin.
Current I RMS	I RMS: averaged values: 1 s class: B 3 s class: A 10 min class: S 2 hrs class: S	I RMS (150% In): In = 1 A - 0.010..0.1..1.5 A (Ki=1) In = 5 A - 0.050..0.5..7.5 A (Ki=1) ..480.0 kA (Ki≠1)	I RMS (10% In - 150% In): ±0.1% of measurement
Frequency	Class S appointed from 10 or 12 cycles in 200 ms.	42.5 up to 57.5 Hz for 50 Hz 51.0 up to 69.0 Hz for 60 Hz	a.c. of supply Class S acc. to EN 61000-4-30:2008 a.c. of supply ±0.050 Hz
	Class A appointed from 100 or 120 cycles in 10 s.	 ±0.010 Hz	Class A acc. to EN 61000-4-30:2008
Active, reactive and apparent power	Active power: Measured every 10 cycles (50 Hz) or 12 cycles (60 Hz) Reactive power: appointed from apparent and active power. Apparent power: appointed from value U RMS and I RMS.	Depends on voltage and actual ratio value. Apparent power: ± 0.5% Sn	acc. to EN 61557-12: Active power: ± 0.5% Pn Reactive power: ± 1% Qn

Measuring Ranges and Admissible Basic Conversion Errors - Continued

Measuring quantity	Measurement method	Range	Basic error
Active imported/ exported energy, reactive imported/ exported energy, apparent energy	Measured every 10 cycles (50 Hz) or 12 cycles (60 Hz). Separate measurement for exporten, imported active and reactive energy.	Depends on voltage and actual ratio value.	acc. to EN 61557-12: Active power: ± 0,5% Reactive power: ± 1% Apparent power: ± 2%
Active power factor Power distortion factor	Active power factor : depends on U RMS, I RMS and active power. Power distortion factor depends on THD I.	-1,000 .. 0 .. 1,000	Power factor PF ± 0.01% Power distortion factor PFdist ± 0.05%
Harmonics of voltages and current	acc. to EN 61000-4-7:2007, up to 51st harmonic Window: 10 cycles (for 50 Hz), 12 cycles (for 60 Hz). FFT: 4096 points	Voltage harmonics: 0.00 .. 100.00 % Current harmonics: 0.00 .. 100.00 %	Voltage harmonics – class II ± 5% Urdg if Urdg > 1% ± 0.05% Un if Urdg < 1% Current harmonics – class II ± 5% Urdg if Urdg > 3% ± 0.5% Un if Urdg < 3%
THD U, THD I, THDG U, THDG I, THDS U, THDS I, PWHD U, PWHD I	acc. to EN 61000-4-7:2007, up to 51st harmonic Window: 10 cycles (for 50 Hz), 12 cycles (for 60 Hz). FFT: 4096 points	THD U: 0.00 .. 100.00 % THD I: 0.00 .. 100.00 % THDG U: 0.00 .. 100.00 % THDG I: 0.00 .. 100.00 % THDS U: 0.00 .. 100.00 % THDS I: 0.00 .. 100.00 % PWHD U: 0.00 .. 100.00 % PWHD I: 0.00 .. 100.00 %	THD U: ±5% (50/60Hz) THD I: ±5% (50/60Hz) THDG U: ±5% (50/60Hz) THDG I: ±5% (50/60Hz) THDS U: ±5% (50/60Hz) THDS I: ±5% (50/60Hz) PWHD U: ±5% (50/60Hz) PWHD I: ±5% (50/60Hz)

where:
Ku - voltage transformer ratio
Ki - current transformer ratio
Udin - declared input voltage
Urdg, Irdg - measurement values
Un, In, Pn, Qn - nominal values

Examples of Measuring Data Presentation



Examples of Measuring Data Presentation

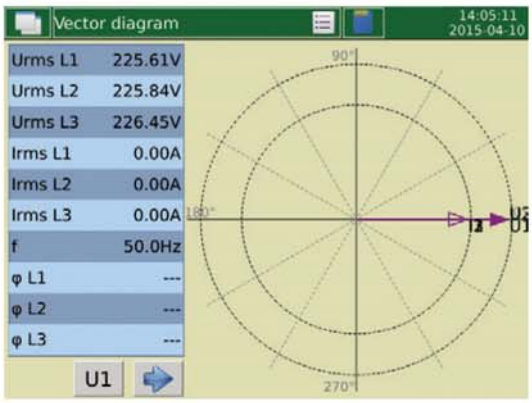

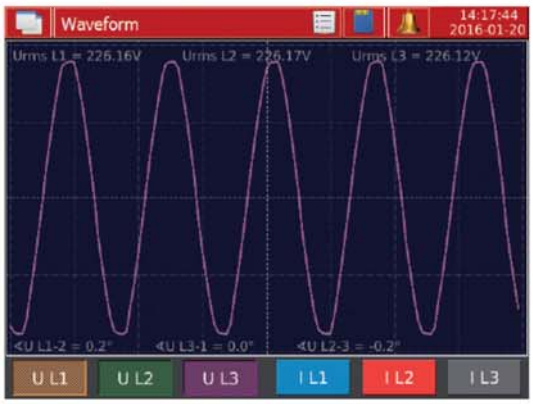

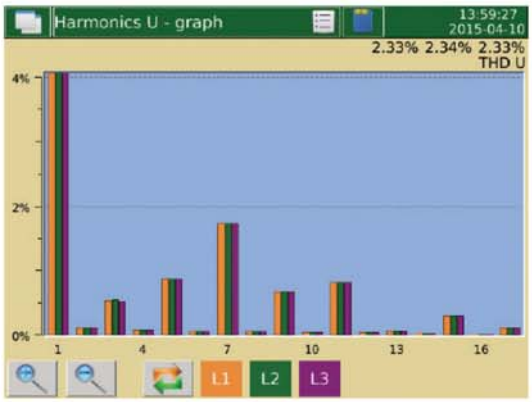

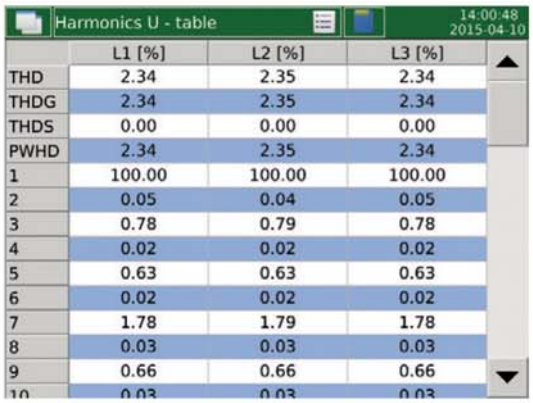

	L1 [%]	L2 [%]	L3 [%]
THD	2.34	2.35	2.34
THDG	2.34	2.35	2.34
THDS	0.00	0.00	0.00
PWHD	2.34	2.35	2.34
1	100.00	100.00	100.00
2	0.05	0.04	0.05
3	0.78	0.79	0.78
4	0.02	0.02	0.02
5	0.63	0.63	0.63
6	0.02	0.02	0.02
7	1.78	1.79	1.78
8	0.03	0.03	0.03
9	0.66	0.66	0.66
10	0.03	0.03	0.03

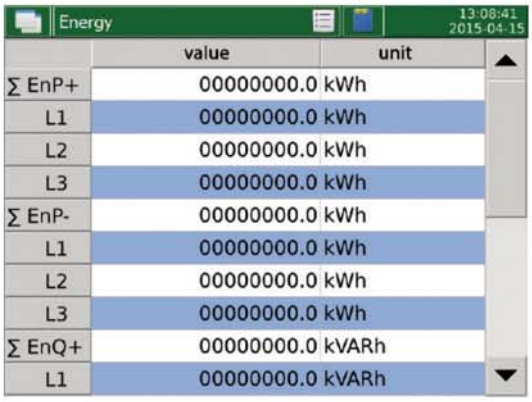

	value	unit
∑ EnP+	00000000.0	kWh
L1	00000000.0	kWh
L2	00000000.0	kWh
L3	00000000.0	kWh
∑ EnP-	00000000.0	kWh
L1	00000000.0	kWh
L2	00000000.0	kWh
L3	00000000.0	kWh
∑ EnQ+	00000000.0	kVARh
L1	00000000.0	kVARh

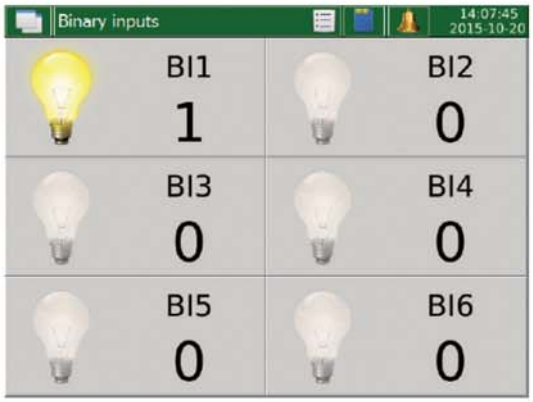

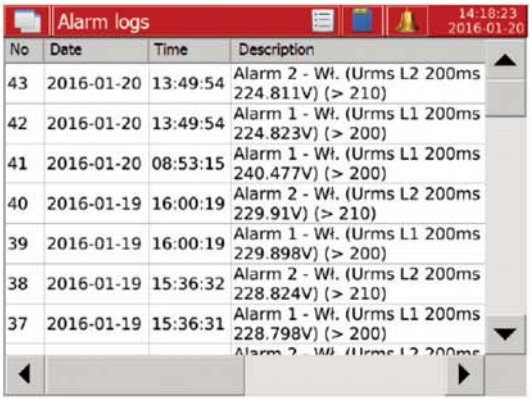

No	Date	Time	Description
43	2016-01-20	13:49:54	Alarm 2 - Wł. (Urms L2 200ms 224.811V) (> 210)
42	2016-01-20	13:49:54	Alarm 1 - Wł. (Urms L1 200ms 224.823V) (> 200)
41	2016-01-20	08:53:15	Alarm 1 - Wł. (Urms L1 200ms 240.477V) (> 200)
40	2016-01-19	16:00:19	Alarm 2 - Wł. (Urms L2 200ms 229.91V) (> 210)
39	2016-01-19	16:00:19	Alarm 1 - Wł. (Urms L1 200ms 229.898V) (> 200)
38	2016-01-19	15:36:32	Alarm 2 - Wł. (Urms L2 200ms 228.824V) (> 210)
37	2016-01-19	15:36:31	Alarm 1 - Wł. (Urms L1 200ms 228.798V) (> 200)

Ethernet:WWW, SERVER, FTP

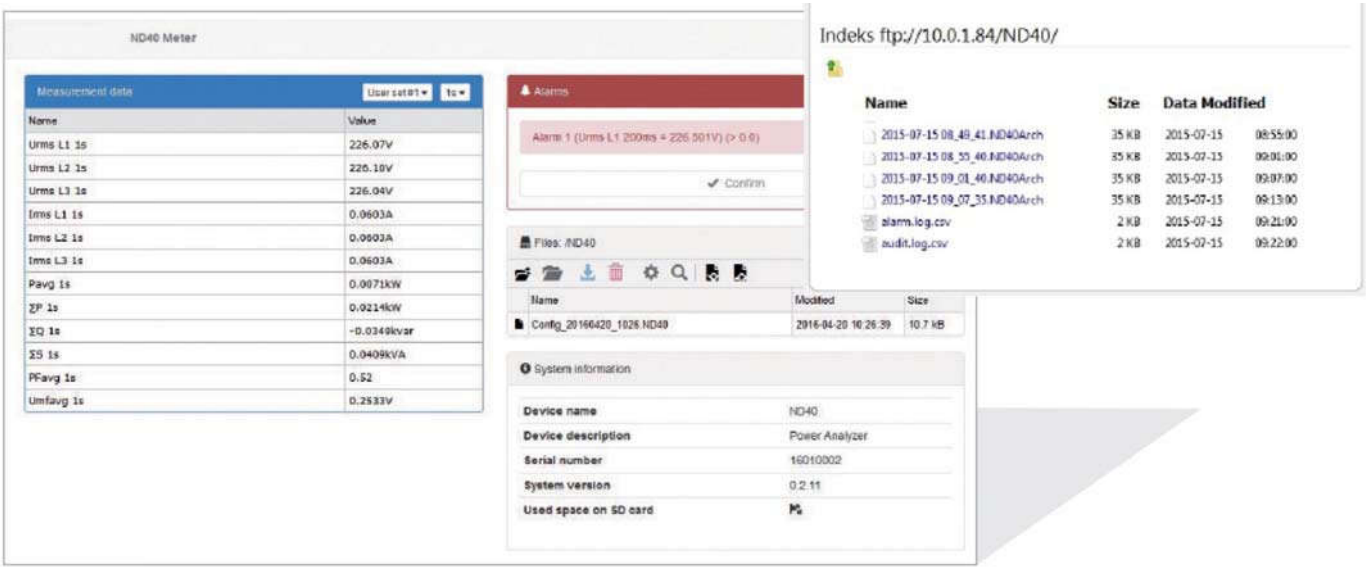

Dimensions and Assembly

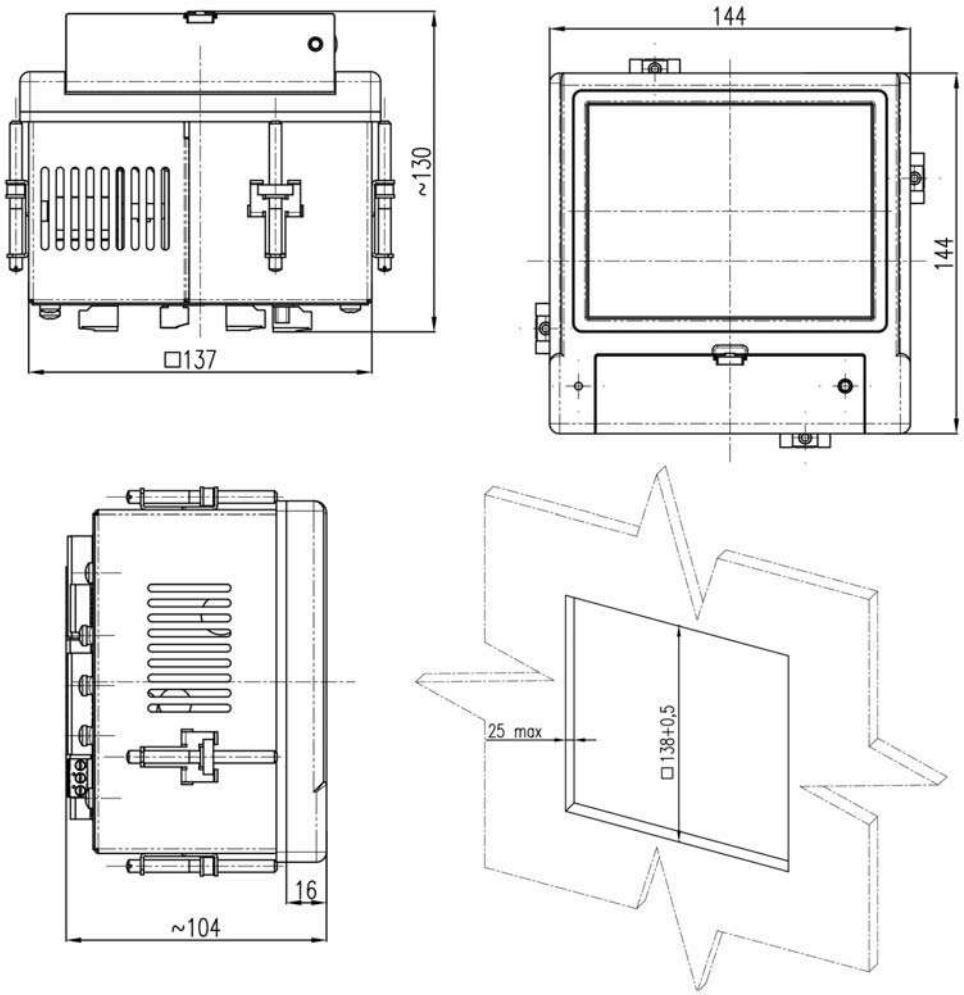

Analyzer/recorder ND40 -	X	X	XX	X	X
Class:					
class S	0				
class A/S	1				
Inputs / outputs:					
whitout		0			
8 relay outputs		1			
6 logic inputs, 4 relay outputs		2			
6 logic inputs, 3 analog outputs		3			
Version:					
standard			00		
custom-made*			XX		
Language:					
English				U	
German				D	
Russian				R	
other*				X	
Acceptance tests:					
without additional quality requirements					0
with an extra quality inspection certificate					1
acc.to customer's request*					X

* - after agreeing with the manufacturer

EXAMPLE OF ORDER:
The code: **ND40 - 0 1 00 E 0** means:
ND40 - analyzer/ recorder ND40
0 - class S
1 - 8 relay outputs
00 - standard version
U - user's manual in English
0 - without additional quality requirements.

See Also



Contact

Sifam w Instrumentation Ltd

1 Warner Drive
Springwood Industrial Estate
Braintree, Essex
CM7 2YW

Tel: 01376 335271
E-mail: sales@sifamtinsley.com

www.sifamtinsley.co.uk