Datasheet

iCF
1ME2 series

- CF 6.0 standard compatible
- supporting PIO 0-6/UDMA 0-6 in True-IDE mode
- Write protection security
- Read disturb management
- Secure Erase
- iPowerGuard
- iDataGuard



Introduction

The Innodisk Industrial CompactFlash® 1ME2 Memory Card (iCF 1ME2) products provide high capacity solid-state flash memory that electrically complies with the True IDE Mode that is electrically compatible with an IDE disk drive. The original CF form factor card can be used in any system that has a CF slot.

Designed to replace traditional rotating disk drives, Innodisk Industrial CompactFlash® 1ME2 Memory Cards are embedded solid-state data storage systems for mobile computing and the industrial work place. The Industrial CompactFlash® features an extremely lightweight, reliable, low-profile form factor. Industrial CompactFlash® 1ME2 (iCF 1ME2) support advanced PIO (0-4), Ultra DMA (0-6) transfer mode, multi-sector transfers, and LBA addressing. Furthermore, the 1ME2 series support iPowerDuard with voltage power-down detection for full power-down robustness

iCF
1ME2 series

Contact us for more information about the iCF 1ME2

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Headquarters (Taiwan)
5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan (R.O.C.)

Tel: +886-2-77033000
Email: sales@innodisk.com


Branch Offices:
USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-40-3045-400
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689


www.innodisk.com

© 2021 Innodisk Corporation.
All right reserved. Specifications are subject to change without prior notice.

20210706

Drawing



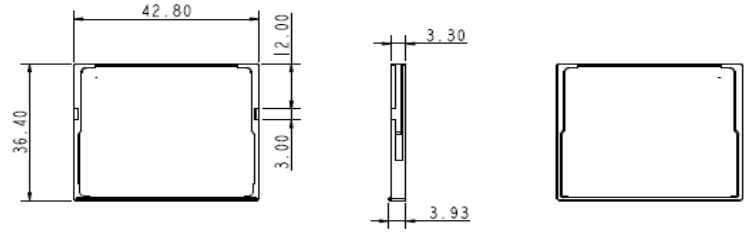

Specifications

Interface	PATA
Flash Type	MLC
Capacity	8GB~256GB
Max. Channels	2
Sequential R/W (MB/sec, max.)	90/60
Max. Power Consumption	0.86 W
Thermal Sensor	√
H/W Write Protect	Optional
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	42.8X 36.4 X 3.3 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -40°C ~ +85°C MTBF: 3 million hours

Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB	128GB	256GB
Standard Grade (0°C ~ +70°C)	DECFC-08GYA2BC1SC(W)	DECFC-16GYA2BC1DC(W)	DECFC-32GYA2BC1DC(W)	DECFC-64GYA2BC1DC(W)	DECFC-A28YA2BC1DC(W)	DECFC-B56YA2BC1DC(W)
Industrial Grade (-40°C ~ +85°C)	DECFC-08GYA2BW1SC(W)	DECFC-16GYA2BW1DC(W)	DECFC-32GYA2BW1DC(W)	DECFC-64GYA2BW1DC(W)	DECFC-A28YA2BW1DC(W)	DECFC-B56YA2BW1DC(W)

*H/W write protect function is optional.
For the write protect demand, please place the order by PN: DECFC-xxxYA2Bx1xC**W**