VARIMETER
Current Relay
BA 9053, MK 9053N

DOLD

0221540



BA 9053



MK 9053N

Your Advantages
- Preventive maintenance
- For better productivity
- Quicker fault locating
- Precise and reliable

Features
- According to IEC/EN 60 255-1, IEC/EN 60 947-1
- to: monitor DC and AC
- BA 9053 with measuring ranges from 2 mA to 25 A
- BA 9053 optionally with 3 measuring ranges 0.1 up to 25 A
- MK 9053N with measuring ranges from 2 mA up to 10 A
- High overload possible
- Input frequency up to 5 kHz
- Galvanic separation between auxiliary circuit - measuring ciruit
- Auxiliary supply AC/DC; BA 9053 with AC
- BA 9053 optionally with start-up delay (MK = standard)
- with time delay, up to max. 100 sec
- BA 9053 optionally with safe separation to IEC/EN 61140
- MK 9053N optionally with remote potentiometer
- As option with manual reset
- Option with fixed settings possible
- LED indicators for operation and contact position
- MK 9053N as option with pluggable terminal blocks for easy exchange of devices
  - with screw terminals
  - or with cage clamp terminals
- Width BA 9053: 45 mm
  Width MK 9053N: 22.5 mm

Circuit Diagrams



BA 9053



BA 9053/4_ _ z. B.:
Terminals i1/k: 0.1 ... 1 A
Terminals i2/k: 0.5 ... 5 A
Terminals i3/k: 1 ... 10 A



MK 9053N



MK 9053N/1_ _

Approvals and Markings

CE | c UL us Canada / USA * | A025518

* see variants

Applications
- Monitoring current in AC or DC systems
- For industrial and railway applications

Function

The relays measure the arithmetic mean value of the rectified measuring current. The AC units are adjusted to the r.m.s value. They have settings for response value and hysteresis. The units work as overcurrent relays but can also be used for undercurrent detection. The hysteresis is dependent on the response value.

2 time delays are possible in different variants:
The start up delay t_a operates only when connecting the auxiliary supply. It disables tripping e.g. caused by an increased starting current of a motor. The response delay t_v is active after exceeding a response value. On overcurrent relays the delay is active when the current goes over the tripping value, on undercurrent relays when the current drops below the hysteresis value.

Indicators

green LED: on, when auxiliary supply connected
yellow LED: on, when output relay acitvated

Connection Terminals

Terminal designation	Signal description
A1, A2	Auxiliary voltage
i, k	Current measuring input
11, 12, 14	1st changeover contact
21, 22, 24	2nd changeover contact
at MK 9053/1_ _: Z1, Z2, Z3	Remote potentiometer for response value

Safety Notes

Please observe when connecting a remote potentiometer to MK 9053N/1_ _:

WARNUNG

Measuring circuit and remote potentiometer not galvanically separated. The voltage on on measuring circuit i, k / PE has connection to the remote potentiometer. The remote potentiometer has to be connected volt- and ground-free.

All technical data in this list relate to the state at the moment of edition. We reserve the right for technical improvements and changes at any time.

Function Diagram without Start-up Delay

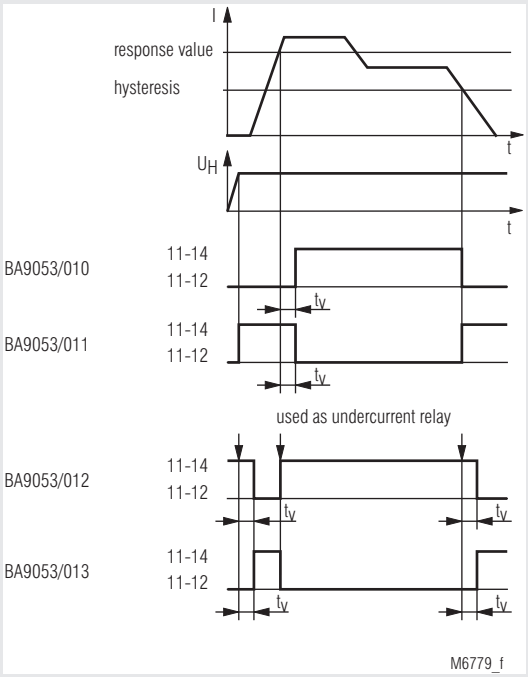

Function Diagram with Start-up Delay

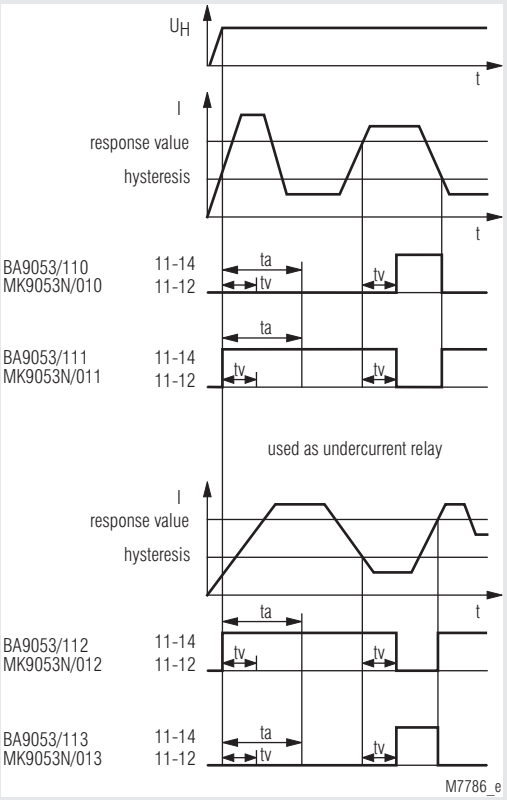

On model BA 9053/6_ _ with manual reset the contacts remain in the fault state after detecting a fault or after to has elapsed. The contacts are reset by disconnecting the supply voltage.

Input (i, k)

BA 9053 for AC **a n d** DC				
Measuring range*)		RM (internal measu-ring resistor (shunt)	max. perm. cont. current	max. permiss. current 3 s On, 100 s Off
AC	DC		Device mounted without distance	
2 - 20 mA	1.8 - 18 mA	1.5 Ω	0.7 A	1 A
20 - 200 mA	18 - 180 mA	0.15 Ω	2 A	4 A
30 - 300 mA	27 - 270 mA	0.1 Ω	2.5 A	8 A
50 - 500 mA	45 - 450 mA	0.1 Ω	2.5 A	8 A
80 - 800 mA	72 - 720 mA	40 mΩ	4 A	12 A
0.1 - 1 A	0.09 - 0.9 A	30 mΩ	4 A	12 A
0.5 - 5 A	0.45 - 4.5 A	6 mΩ	10 A	30 A
1 - 10 A	0.9 - 9 A	3 mΩ	20 A	40 A
1.5 - 15 A	1.35 - 13.5 A	3 mΩ	25 A	40 A
2 - 20 A	1.8 - 18 A	3 mΩ	25 A	40 A
2.5 - 25 A	2.25 - 22.5 A	3 mΩ	25 A	40 A
* DC or AC current 50 ... 5000 Hz (other frequency ranges of 10 ... 5000 Hz, e.g. 16 $^2/_3$ Hz on request)				

BA 9053/4_ _ with 3 measuring ranges:			
Range:	**Terminals i1/k**	**Terminals i2/k**	**Terminals i3/k**
AC 20 mA / 200 mA / 1A:	AC 2.0 ... 20 mA	AC 20 ... 200 mA	AC 0.1 ... 1 A
	DC 1.8 ... 18 mA	DC 18 ... 180 mA	DC 0.09 ... 0.9 A
AC 1 / 5 / 10A:	AC 0.1 ... 1 A	AC 0.5 … 5 A	AC 1.0 ... 10 A
	DC 0.09 ... 0.9 A	DC 0.45 ... 4.5 A	DC 0.9 ... 9 A
AC 5 / 10 / 25A:	AC 0.5 ... 5 A	AC 1.0 ... 10 A	AC 2.5 ... 25 A
	DC 0.45 ... 4.5 A	DC 0.9 ... 9 A	DC 2.25 ... 22.5 A

MK 9053N with 1 Measuring range for AC **a n d** DC					
Measuring range*)		RM (internal measu-ring resistor (shunt)	max. perm. cont. current		max. permiss. current 3 s On, 100 s Off
AC	DC		Device mount. without distance	with 5 mm dis-tance	
2 - 20 mA	1.8 - 18 mA	1.5 Ω	0.5 A	0.7 A	1 A
20 - 200 mA	18 - 180 mA	0.15 Ω	1.5 A	2 A	4 A
30 - 300 mA	27 - 270 mA	0.1 Ω	2 A	2.5 A	8 A
50 - 500 mA	45 - 450 mA	0.1 Ω	2 A	2.5 A	8 A
0.1 - 1 A	0.09 - 0.9 A	30 mΩ	3 A	4 A	8 A
0.5 - 5 A	0.45 - 4.5 A	6 mΩ	8 A	11 A	20 A
1 - 10 A	0.9 - 9 A	3 mΩ	12 A	15 A	20 A
* DC or AC current 50 ... 5000 Hz (Other frequency ranges of 10 ... 5000 Hz, e.g. 16 $^2/_3$ Hz on request)					

Extending of measuring range: For DC-current higher then the highest measuring range the current relay BA 9053 or MK 9053N measuring range 15 ... 150 mV or 6 ... 60 mV can be used with external Shunt. For AC current higher then the highest measuring range can be used a current transformer e. g. with secondary winding of 1 A or 5 A togehter with BA 9053 or MK 9053N. The nominal load of the CT should be ≥ 0.5 VA.

Measuring principle: arithmetic mean value

Adjustment: The AC - devices can also monitor DC current. The scale offset in this case is: (I = 0.90 I_{eff})

Temperature influence: < 0.05 % / K

Setting Ranges

Setting

Response value: infinite variable 0.1 I_N ... 1 I_N relative scale

Hysteresis

at AC: infinite variable 0.5 ... 0.98 of setting value

at DC: infinite variable 0.5 ... 0.96 of setting value

Accuracy:

Response value at

Potentiometer right stop (max): 0 .... + 8 %

Potentiometer left stop (min): - 10 .... + 8%

Repeat accuracy: ≤ ± 0.5 %

Recovery time

at devices with manual reset (Reset by braking of the auxiliary voltage)

BA 9053/6_ _; MK 9053N/6_ _: ≤ 1 s (dependent to function and auxiliary voltage)

Time delay t_v: infinite variable at logarythmic scale from 0 ... 20 s, 0 ... 30 s, 0 ... 60 s, 0 ... 100 s setting 0 s = without time delay

Start-up delay t_a:

BA 9053/1 _ _: 1 ... 20 s; 1 ... 60 s; 1 ... 100 s, adjustable on logarithmic scale. t_a is started when the supply voltage is connected. During elapse of time the output contact is in good state

MK 9053N: 0.1 ... 20 s; 0.1 ... 60 s; 0.1 ... 100 s

Auxiliary Circuit BA 9053 and MK 9053N

Auxiliary voltage U_H (A1, A2)

BA 9053, Nominal voltages: AC 24, 42, 110, 127, 230, 400 V

Voltage range: 0.8 ... 1.1 U_H

Nominal frequency: 50 / 60 Hz

Frequency range: ± 5 %

Nominal consumption: 2.5 VA

BA 9053:		
Nominal voltage	**Voltage range**	**Frequency range**
AC/DC 24 ... 80 V	AC 18 ... 100 V	45 … 400 Hz; DC 48 % W
	DC 18 ... 130 V	W ≤ 5 %
AC/DC 80 ... 230 V	AC 40 ... 265 V	45 … 400 Hz; DC 48 % W
	DC 40 ... 300 V	W ≤ 5 %
DC 12 V	DC 10 ... 18 V	battery voltage

MK 9053N:		
Nominal voltage	**Voltage range**	**Frequency range**
AC/DC 24 ... 80 V	AC 18 ... 100 V	45 … 400 Hz; DC 48 % W
	DC 18 ... 130 V	W ≤ 5 %
AC/DC 80 ... 230 V	AC 60 ... 265 V	45 … 400 Hz; DC 48 % W
	DC 60 ... 300 V	W ≤ 5 %

Nominal consumption: 4 VA; 1.5 W at AC 230 V Rel. energized
1 W at DC 80 V Rel. energized

Technical Data

Output

Contacts

BA 9053:	2 changeover contacts	
MK 9053N:	2 changeover contacts	
Thermal current I_{th}:		
BA 9053:	2 x 5 A	
MK 9053N:	2 x 4 A	
Switching capacity		
BA 9053		
to AC 15:		
NO contact:	2 A / AC 230 V	IEC/EN 60 947-5-1
NC contact:	1 A / AC 230 V	IEC/EN 60 947-5-1
MK 9053N		
to AC 15:	1.5 A / AC 230 V	IEC/EN 60 947-5-1
BA 9053, MK 9053N		
to DC 13:	1 A / DC 24 V	IEC/EN 60 947-5-1
Electrical life		
BA 9053		
to AC 15 at 3 A, AC 230 V:	5 x 10^5 switch. cycl.	IEC/EN 60 947-5-1
MK 9053N		
to AC 15 at 3 A, AC 230 V:	10^5 switching cycles	IEC/EN 60 947-5-1
Short-circuit strength		
max. fuse rating:	6 A gG (gL)	IEC/EN 60 947-5-1
Mechanical life		
BA 9053:	50 x 10^6 switching cycles	
MK 9053N:	30 x 10^6 switching cycles	

General Data

Operating mode:	Continuous operation	
Temperature range:		
BA 9053 (operation):		
≤ 10 A:	- 40 ... + 60°C	
≥ 15 A:	- 40 ... + 50°C (higher temperature with limitations on request)	
MK 9053N (operation):	- 20 ... + 50°C (higher temperature with limitations on request)	
BA 9053, MK 9053N (storage):	- 40 ... + 70°C	
Altitude:	< 2,000 m	
Clearance and creepage distances		
rated impulse voltage / pollution degree		
BA 9053 meas. range ≤ 10 A:	6 kV / 2	IEC 60 664-1
BA 9053 meas. range ≥ 15 A:	4 kV / 2	IEC 60 664-1
MK 9053N:	4 kV / 2	IEC 60 664-1
EMC		
Electrostatic discharge:	8 kV (air)	IEC/EN 61 000-4-2
HF irradiation		
80 MHz ... 1 GHz:	20 V/m	IEC/EN 61 000-4-3
1 GHz ... 2.7 GHz:	10 V/m	IEC/EN 61 000-4-3
Fast transients:	4 kV	IEC/EN 61 000-4-4
Surge voltages between		
wires for power supply:	2 kV	IEC/EN 61 000-4-5
between wire and ground:	4 kV	IEC/EN 61 000-4-5
HF wire guided:	10 V	IEC/EN 61 000-4-6
Interference suppression:	Limit value class B	EN 55 011
Degree of protection		
Housing:	IP 40	IEC/EN 60 529
Terminals:	IP 20	IEC/EN 60 529
Housing:	Thermoplastic with V0 behaviour according to UL subject 94	
Vibration resistance:	Amplitude 0.35 mm frequency 10 ... 55 Hz	IEC/EN 60 068-2-6
Climate resistance		
BA 9053		
≤ 10 A:	40 / 060 / 04	IEC/EN 60 068-1
≥ 15 A:	40 / 050 / 04	IEC/EN 60 068-1
MK 9053N:	20 / 060 / 04	IEC/EN 60 068-1
Terminal designation:	EN 50 005	

Technical Data

Wire connection

BA 9053:	2 x 2.5 mm^2 solid or 2 x 1.5 mm^2 stranded wire with sleeve
MK 9053N:	
Screw terminals (integrated):	1 x 4 mm^2 solid or 1 x 2.5 mm^2 stranded ferruled (isolated) or 2 x 1.5 mm^2 stranded ferruled (isolated) or 2 x 2.5 mm^2 solid
Insulation of wires or sleeve length:	8 mm
Plug in with screw terminals	
max. cross section for connection:	1 x 2.5 mm^2 solid or 1 x 2.5 mm^2 stranded ferruled (isolated)
Insulation of wires or sleeve length:	8 mm
Plug in with cage clamp terminals	
max. cross section for connection:	1 x 4 mm^2 solid or 1 x 2.5 mm^2 stranded ferruled (isolated)
min. cross section for connection:	0.5 mm^2
Insulation of wires or sleeve length:	12 $^{\pm 0.5}$ mm
Wire fixing:	
BA 9053:	Plus-minus terminal screws M3.5 with self-lifting clamping piece IEC/EN 60 999-1
MK 9053N:	Plus-minus terminal screws M3.5 box terminals with wire protection or cage clamp terminals
Stripping length:	10 mm
Fixing torque:	0.8 Nm
Mounting:	DIN-rail IEC/EN 60 715
Weight	
BA 9053:	AC-device: 280 g AC/DC-device: 200 g
MK 9053N:	150 g

Dimensions

Width x height x depth	
BA 9053:	45 x 75 x 120 mm
MK 9053N:	22.5 x 90 x 97 mm

Classification to DIN EN 50155 for BA 9053

Vibration and shock resistance:	Category 1, Class B	IEC/EN 61 373
Ambient temperature:	T1, T2 compliant T3 and TX with operational limitations	
Protective coating of the PCB:	No	

UL-Data

Auxiliary voltage U_H(A1, A2)		
BA 9053:	AC 24, 42, 48, 110, 115, 120 V	
Thermal current I_{th}:		
BA 9053:	2 x 5 A	
MK 9053N:	2 x 4 A	
Clearance and creepage distances		
BA 9053, MK 9053N:	4 kV / 2	IEC 60 664-1
HF irradiation		
BA 9053 (80 MHz ... 2.7 GHz)	10 V/m	IEC/EN 61 000-4-3
Switching capacity:	Pilot duty B150	
Ambient temperature:	- 40 ... + 60°C	

Technical data that is not stated in the UL-Data, can be found in the technical data section.

CCC-Data

Switching capacity		
to AC 15:	1.5 A / AC 230 V	IEC/EN 60 947-5-1
to DC 13:	1 A / DC 24 V	IEC/EN 60 947-5-1

Technical data that is not stated in the CCC-Data, can be found in the technical data section.

Standard Type

BA 9053/010 AC 0.5 ... 5 A AC 230 V
Article number: 0053128
- for Overcurrent monitoring
- Measuring range: AC 0.5 ... 5 A
- Auxiliary voltage U_H: AC 230 V
- Time delay by I_{an}: 0 ... 20 s
- Width: 45 mm

BA 9053/012 AC 0.5 ... 5 A AC 230 V
Article number: 0053192
- for Undercurrent monitoring
- Measuring range: AC 0.5 ... 5 A
- Auxiliary voltage U_H: AC 230 V
- Time delay by I_{ab}: 0 ... 20 s
- Width: 45 mm

MK 9053N.12/010 AC 0.5 ... 5 A AC/DC 80 ... 230 V t_v 0 ... 20 s t_a 0.1 ... 20 s
Article number: 0063176
- for Overcurrent monitoring
- Measuring range:: AC 0.5 ... 5 A
- Auxiliary voltage U_H: AC/DC 80 ... 230 V
- Time delay by t_v: 0 ... 20 s
- Start up delay t_a: 0.1 ... 20 s
- Width: 22.5 mm

Ordering Example for Variants

BA 9053 / _ _ _ /61 AC 1 ... 10 A AC 24 V 0 ... 20 s 1 ... 100 s

- Start up delay t_a
- Time delay t_v
- Auxiliary voltage
- Measuring range
- With UL-approval
- 10 Overcurrent relay energized on trip time delay at setting value
- 11 Overcurrent relay de-energized on trip time delay at setting value
- 12 Undercurrent relay de-energized on trip time delay at hysteresis value
- 13 Undercurrent relay energized on trip time delay at hysteresis value
- 0 Standard version
- 1 With start up delay t_a
- 2 With safe electrical separation of input- and output circuit accroding to DIN 61140
  Meas. range up to ≤ 10 A: DIN EN 60947-1; 4 kV/2 in relation of over-voltage category III with basic insulation to DIN EN 60664-1 of 4 kV;
  Meas. range up to ≥ 15 A: overvoltage category II with basic insulation of 2.5 kV
- 3 With 5 µm gold plated contacts
- 4 With 3 current ranges 1 C/O contact
- 431 With 3 current ranges 1 C/O contact, with safe separation up to 10 A
- 5 With forcibly guided contacts
- 6 With manual reset, resetting by disconnecting the power supply
- Type

MK 9053N _ _ / _ _ _ AC 0,1 ... 1 A AC 230 V 0 ... 20 s 0,1 ... 20 s

- Start up delay t_a
- Time delay t_v
- Auxiliary voltage
- Measuring range
- 10 Overcurrent relay energized on trip
- 11 Overcurrent relay de-energized on trip
- 12 Undercurrent relay de-energized on trip
- 13 Undercurrent relay energized on trip
- 0 Standard version without remote potentiometer
- 1 Standard version with remote potentiometer (response-value) Z1, Z2, Z3 for 470 kΩ **at this version there is no potentiometer for the response value**
- 6 With manual reset, resetting by disconnecting the power supply
- Type of terminals
  Without indication: terminal blocks fixed, with screw terminals
  PC (plug in cage clamp): pluggable terminal blocks with cage clamp terminals
  PS (plug in screw): pluggable terminal blocks with screw terminals
- Type

Options with Pluggable Terminal Blocks



Screw terminal
(PS/plugin screw)



Cage clamp
(PC/plugin cage clamp)

Notes

Removing the terminal blocks with cage clamp terminals

1. The unit has to be disconnected.
2. Insert a screwdriver in the side recess of the front plate.
3. Turn the screwdriver to the right and left.
4. Please note that the terminal blocks have to be mounted on the belonging plug in terminations.

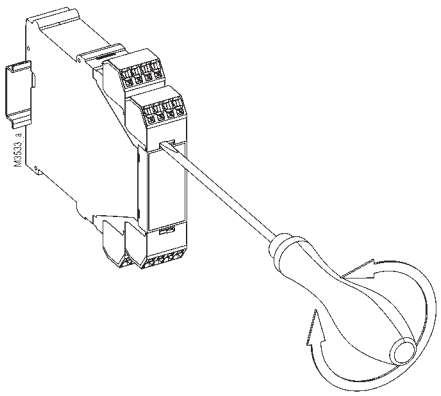

Accessories

AD 3:	Remote potentiometer 470 KΩ Article number: 0050174

Setting

Example:
Current relay BA 9053 / MK 9053N AC 0.5 ... 5 A

AC according to type plate:
i.e. the unit is calibrated for AC
0.5 ... 5 A = measuring range

Response value AC 3 A
Hysteresis AC 1.5 A

Settings:

upper potentiometer:	0.6	(0.6 x 5 A = 3 A)
lower potentiometer:	0.5	(0.5 x 3 A = 1.5 A)

The AC - devices can also monitor DC current. The scale offset in this case is: $\overline{I} = 0.90 \times I_{eff}$

AC 0.5 ... 5 A is equivalent to DC 0.45 ... 4.5 A

Response value DC 3 A
Hysteresis DC 1.5 A

Settings:

upper potentiometer:	0.66	(0.66 x 4.5 A = 3 A)
lower potentiometer:	0.5	(0.5 x 3 A = 1.5 A)

Characteristic

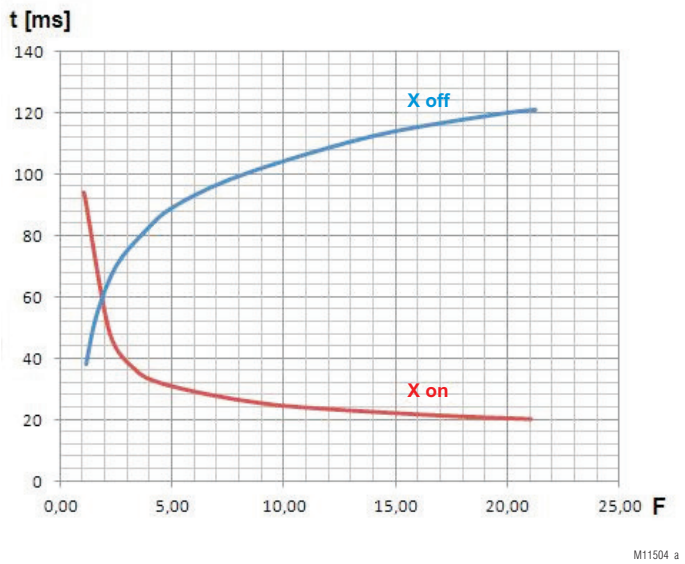

Time delay of measuring circuit

X on: Measured value rise $F = \frac{\text{Measured value (after rise of measured value)}}{\text{Setting value}}$

X off: Measured value drops $F = \frac{\text{Mesaured value (befor measured value drops)}}{\text{Setting value (hysteresis)}}$

The diagram shows the typical delay of a standard devices depending on the measured values "X on and X off" at sudden rise or drop of the signal. At slow change of the measured value the delay is shorter.
The total reaction time of the device results from the adjustable delay t_v and the delay created by the measuring circuit.

The diagram shows an average delay. The delay times could differ on the different variants.

Example for "X on" (overcurrent detection with BA9053/010):
Adjusted setting value X on = 2 A.
Due to a stalled motor the current rises suddenly to 10 A.

$$F = \frac{\text{Measured value (after rise of measured value)}}{\text{Setting value}} = \frac{10\ \text{A}}{2\ \text{A}} = 5$$

Reading from the diagram:
The output relay switches on after 31 ms at a setting t_v=0.

Example for "X off" (undercurrent detection with BA9053/012):
Adjusted hysteresis setting value is 10 A.
The current drops suddenly from 23 A to 0 A.

$$F = \frac{\text{Mesaured value (befor measured value drops)}}{\text{Setting value (hysteresis)}} = \frac{23\ \text{A}}{10\ \text{A}} = 2.3$$

Reading from the diagram:
The output relay switches off after 70 ms at a setting t_v=0.