MTL4511 – MTL5511 SWITCH/ PROXIMITY DETECTOR INTERFACE

1-channel, with line fault detection

The MTLx511 enables a safe-area load to be controlled by a switch or proximity detector located in a hazardous-area. When selected, open or short circuit conditions in the field wiring are detected by the line-fault-detect (LFD) facility and also indicated on the top of the module. Phase reversal for the channel is selected by a switch on the side of the module and output is provided by changeover relay contacts.

SPECIFICATION

See also common specification

Number of channels
One

Location of switches
Zone 0, IIC, T6 hazardous area
Div. 1, Group A hazardous location

Location of proximity detector
Zone 0, IIC, T4–6 hazardous area if suitably certified
Div. 1, Group A hazardous location

Hazardous-area inputs
Inputs conforming to BS EN60947–5–6:2001 standards for proximity detectors (NAMUR)

Voltage applied to sensor
7 to 9V dc from 1kΩ ±10%

Input/output characteristics
Normal phase
Outputs closed if input > 2.1mA (< 2kΩ in input circuit)
Outputs open if input < 1.2mA (> 10kΩ in input circuit)
Hysteresis: 200µA (650Ω) nominal

Line fault detection (LFD) (when selected)
User-selectable via switches on the side of the unit. A line fault is indicated by an LED. The channel output relay is de-energised if an input line fault is detected.
Open-circuit alarm on if I_{in} < 50µA
Open-circuit alarm off if I_{in} > 250µA
Short-circuit alarm on if R_{in} < 100Ω
Short-circuit alarm off if R_{in} > 360Ω
Note: Resistors must be fitted when using the LFD facility with a contact input
500Ω to 1kΩ in series with switch
20kΩ to 25kΩ in parallel with switch

Safe-area output
Single pole relay with changeover contacts
Note: reactive loads must be adequately suppressed

Relay characteristics

	MTL4511	MTL5511
Response time:	10ms maximum	10ms maximum
Contact rating (Safe Area):	10W, 0.5A, 35V dc	250V ac, 2A, cosØ >0.7, 40V dc, 2A, resistive load
Contact rating (Zone 2):	10W, 0.5A, 35V dc	35V, 2A, 100VA.

MTL4511

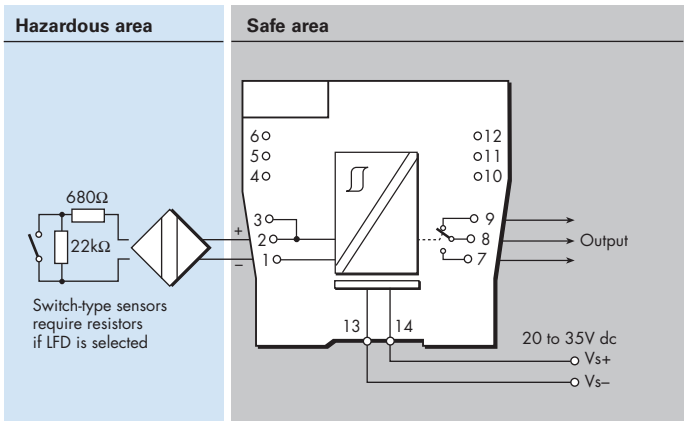

MTL5511

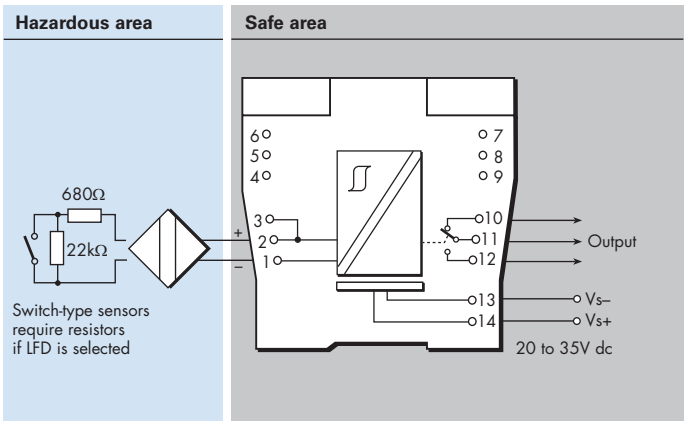

LED indicators
Green: power indication
Yellow: channel status, on when output energised
Red: LFD indication, on when line fault detected

Maximum current consumption
25mA at 24V

Power dissipation within unit
0.6W at 24V

Safety description (each channel)
U_o=10.5V I_o=14mA P_o=37mW U_m = 253V rms or dc

SIL capable
These models have been assessed for use in IEC 61508 functional safety applications.
SIL2 capable for a single device (HFT=0)
SIL3 capable for multiple devices in safety redundant configurations (HFT=1)
See data on MTL web site and refer to the safety manual.

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee.
In the interest of further technical developments, we reserve the right to make design changes.

Powering Business Worldwide

Eaton Electric Limited,
Great Marlings, Butterfield, Luton
Beds, LU2 8DL, UK.
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283
E-mail: mtlenquiry@eaton.com
www.mtl-inst.com

© 2016 Eaton
All Rights Reserved

Publication No.
EPSx511 Rev6 010916

EUROPE (EMEA):
+44 (0)1582 723633 mtlenquiry@eaton.com
THE AMERICAS:
+1 800 835 7075 mtl-us-info@eaton.com
ASIA-PACIFIC:
+65 6 645 9888 sales.mtlsing@eaton.com