THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	RELEASED	09/01/09	DFP
B	ECN4728: .31 WAS .32. .070 WAS .06	05/06/10	DFP
C	ECN 8014: OVERALL DIMENSION WAS 1.42, ADDED NOTES	7/13/15	D.FRISIELLO

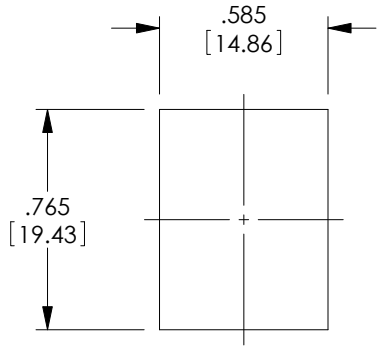

RECOMMENDED
PANEL OPENING

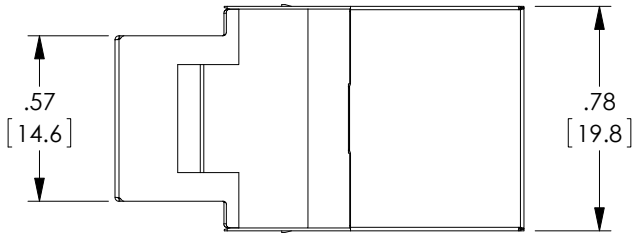

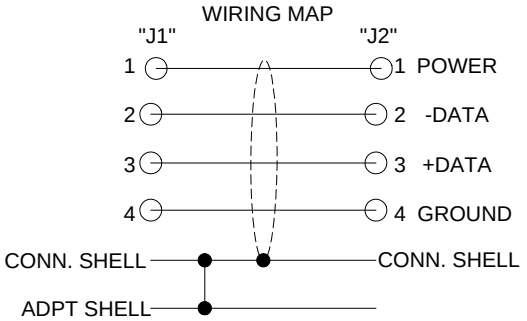



"J1"
USB TYPE B JACK
30u" SELECTIVE GOLD PLATED CONTACT
NICKEL PLATED SHELL

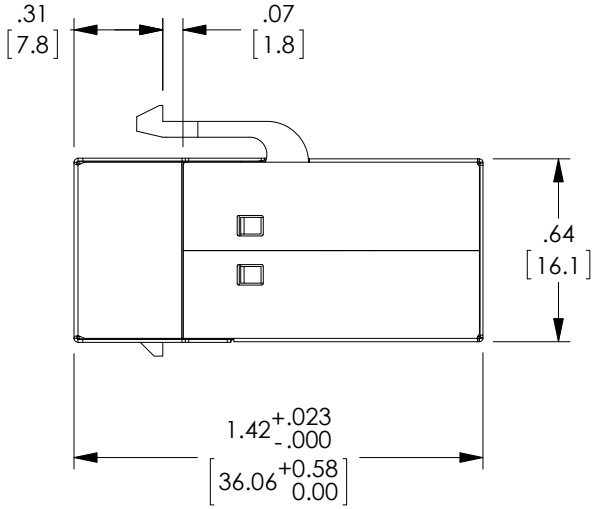



"J2"
USB TYPE A JACK
30u" SELECTIVE GOLD PLATED CONTACT
NICKEL PLATED SHELL

NOTES:

1. ADAPTER HOUSING: ABS, UL94V-0 RATED
2. ADAPTER SHIELDING: BRASS, NICKEL PLATED
3. PCB: GLASS FIBER EPOXY; FR-4,UL94 V-0
4. USB CONNECTORS MEET USB2.0 STANDARD
5. OPERATING TEMPERATURE: -20°C~+60°C
6. ADAPTER SHALL BE TESTED FOR CONTINUITY.
7. ADAPTER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS	DATE
DRAWN BY D. PARHAM	09/01/2009
CHECKED BY ENG	09/02/2009
APPROVED BY S. SMITH	09/02/2009

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
USB

PRODUCT DESCRIPTION
ADPT, USB KEYSTONE B-A

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	UADKEY-BA	C

SCALE: NONE | CAD FILE: UADKEY-BA.SLDDRW | SHEET 1 OF 1