NSB - 1/2" drive long-reach metric thin-wall 6-point impact sockets



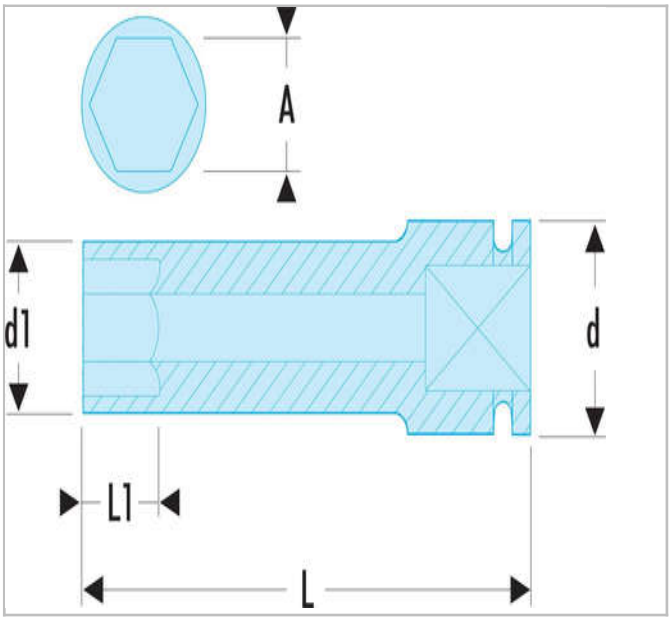

Standards:

NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33

Description:

- For your safety, use impact sockets and accessories with the appropriate rings and pins.
- Thin wall for better access.
- 6-point convex pattern for increased resilience.

© FACOM 2020

	A [mm]	Diameter [mm]	Diameter D1 [mm]	Length L [mm]	Length L1 [mm]	Weight [g]	Hex Size [mm]	Height H3 [mm]
NSB.10	10.0	24.0	17.0	80.0	78.0	170.0	6.0	10.0
NSB.13	13.0	24.0	21.0	80.0	78.0	210.0	6.0	13.0
NSB.15	15.0	24.0	24.0	80.0	78.0	220.0	6.0	15.0
NSB.16	16.0	24.0	24.0	80.0	78.0	230.0	6.0	16.0
NSB.17	17.0	26.0	26.0	80.0	78.0	245.0	6.0	17.0
NSB.18	18.0	25.0	28.0	80.0	78.0	245.0	6.0	18.0
NSB.19	19.0	25.0	28.0	80.0	78.0	240.0	6.0	19.0
NSB.21	21.0	25.0	30.0	80.0	78.0	245.0	6.0	22.0
NSB.22	22.0	30.0	32.0	85.0	78.0	250.0	6.0	23.0
NSB.24	24.0	30.0	34.0	85.0	78.0	280.0	6.0	24.0
NSB.27	27.0	30.0	38.0	85.0	78.0	325.0	6.0	27.0
NSB.30	30.0	30.0	42.0	85.0	78.0	330.0	6.0	30.0
NSB.32	32.0	30.0	44.0	85.0	78.0	335.0	6.0	32.0

© FACOM 2020