Twilight switches, Wall mounting or mast installation



LUNA 127 star S

Description

- Twilight switch with integrated light sensor
- Cable feed from the back and from below possible
- Test function
- Teach-in function
- Timer function (1 hour on)
- Switchable brightness range: 2-100 / 100-2000 lux
- Captive screws
- Large terminal area
- Brightness value can be set without opening the device
- Large light exposure angle
- Freely adjustable switching brightness

Product selection

Brightness setting range	On/off switching delay	Switching capacity at 230 V AC	Type	Item no.
2–2000 lx	2–100 s	16 (10) A AX	LUNA 127 star S	1270900

Technical data

LUNA 127 star S			
Operating voltage	230 V AC	Switching capacity	16 A (at 250 V AC, cos φ = 1), 10 AX (fluorescent lamp load)
Frequency	50–60 Hz	Incandescent/halogen lamp load	2300 W
Standby output	0.7 W	LED lamp < 2 W	50 W
Brightness setting range	2–100 lx / 100–2000 lx	LED lamp > 2 W	600W
Switch-on delay	2–100 s	Ambient temperature	–35 °C ... +55 °C
Switch-off delay	2–100 s	Protection class	II

Accessories

LUNA star bezel plate
↳ Item no.: 9070486

LUNA star adapter for mast installation
↳ Item no.: 9070793

Scale drawings

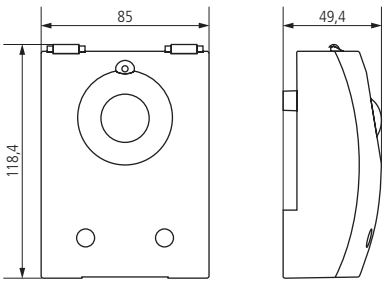

Connection example

