HIRSCHMANN® Test & Measurement
A BRAND OF SKS

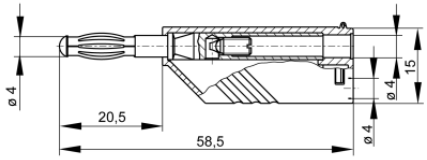
SKS Kontakttechnik GmbH

Plugs

LAS N WS Au



CE

Product	LAS N WS Au
description	Connector for tower construction with screw connection for leads from 0.5 mm² to 1.5 mm², outer diameter of lead max. 4.2 mm. Plug 4 mm with gold-plated caged spring, not contact-protected. Simple assembly by Click-System.
operating instruction	BA415
article-no. / *colour	9341007xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 05 brown · 06 gray · 07 white · 09 violet Au
drawing	
	
technical data	
connection	screw terminal
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (2)
rated current (consider derating curve)	24 A
material plug	brass, gold plated
housing material	PA
temperature range acc. To IEC61010(1)	-15 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

4 mm system

(1) contact the manufacturer for applications at deviating temperature ranges
(2) without rated measurement category, for other circuits that are not directly connected to mains
stand: 21.06.2022

stand: 21.06.2022