

GS4

For R4N

Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
35 mm rail mount
acc. to PN-EN 60715
or on panel mounting
67 x 30,8 x 30(~63,7) mm ❼
Four poles
6 A, 300 V AC



Connection diagram




Accessories


GS4-0036


GS4-0035


Dimensions

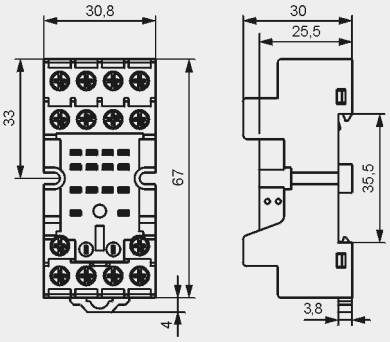


SU4D

For R4N

For PCB
29,6 x 21,5 x 11 mm
Four poles
6 A, 250 V AC




Pinout



Accessories


G4 1053


Dimensions

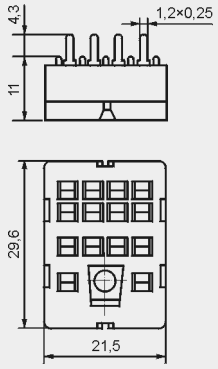


SU4L

For R4N

Solder terminals
29,6 x 21,5 x 18,1 mm
Four poles
6 A, 250 V AC



Dimensions of opening on panel mounting




Accessories


G4 1053


G4 1040


Dimensions

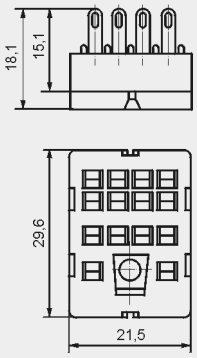


G4

For R4N

Solder terminals
40,5 x 21,5 x 18,1 mm
Four poles
6 A, 250 V AC




Pinout of openings on panel mounting



Accessories


G4 1053

Dimensions

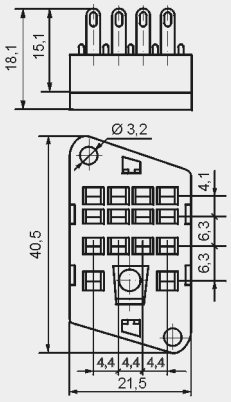

❼ In the bracket the height of socket with spring wire clip is shown.