Stego, Inc.
95 Chastain Road NW
Suite 200
Kennesaw, GA 30144, USA
Toll-Free: (888) 783-4611 • **Phone:** (770) 984-0858
Email: info@stegousa.com • **Website:** www.stego-usa.com

Part # 01140.9-00, Small Thermostat



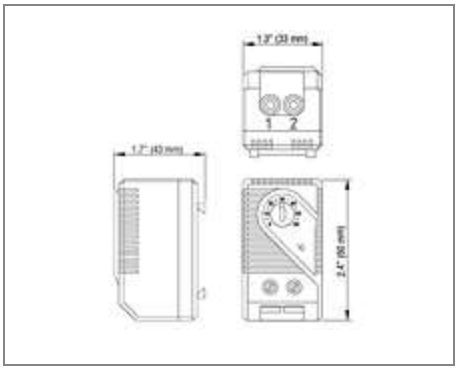

Specifications | Technical Data

Specifications

Contact Type	NC / open on rise
Scale / Range	32 to 140 °F
Voltage	250 VAC max.
Agency Approvals	UL, CSA

Technical Data

Sensor Element	Thermostatic bi-metal
Switching Difference (Hysteresis)	12.6 °F ± 7 °F (7 °C ± 4 K)
Service LIfe	100,000 cycles
Switching Capacity (Max. Load)	15 A resistive/2 A inductive at 120 VAC 10 A resistive/2 A inductive at 250 VAC DC 30W

Minimum Load	20 mA (all voltages)
EMI/EMC Compliance	EN 55014-1-2, EN 61000-3-2, EN 61000-3-3
Connection	2-pole terminal for AWG 14 max. (2.5 mm^2)
Mounting	Clip for 35 mm DIN rail (EN 60 715)
Dimensions (H x W x D)	2.4 x 1.3 x 1.7 inches (60 x 33 x 43 mm)
Housing	Plastic, UL 94V-0, light gray
Weight	1.4 oz (40 g)
Operating/Storage Temperature	-49 to 158 ºF (-45 to 70 ºC)
Protection Type	IP20