
U.232 - 2-leg sliding-leg pullers



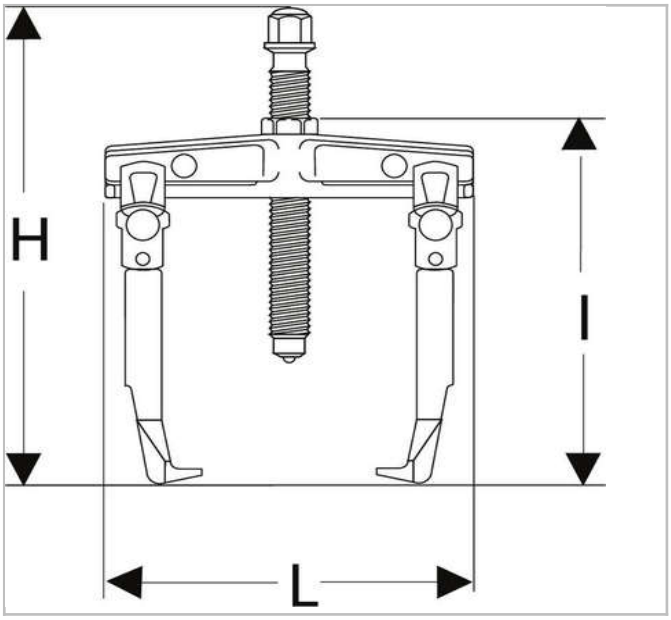

Description:

● Versatile: conversion possible in inside or outside grip with the same leg.
● Safety: - Stops to prevent legs from falling. - Under pressure, the legs are set to overhang to avoid sliding.

© FACOM 2020

	Depth Maxi [mm]	Length L [mm]	Height H [mm]	Length [mm]	Hex Size [mm]	Screw Size ["]	Screw Size Multi [mm]	Tonnes []	t []	Weight [Kg]
U.232-130	100.0	186.0	182.0	155.0	21.0	U.35SE1	17.0	3.0	30.0	1.0
U.232-160	145.0	247.0	283.0	233.0	27.0	U.53S2A07	17.0	4.0	40.0	2.8
U.232-210	145.0	297.0	283.0	233.0	27.0	U.53S2A07	17.0	4.0	40.0	3.0
U.232-270	190.0	379.0	345.0	303.0	36.0	U.53S3-07	32.0	5.0	50.0	7.5
U.232-340	190.0	449.0	345.0	303.0	36.0	U.53S3-07	36.0	5.0	50.0	8.2
U.232-65	65.0	115.0	133.0	105.0	16.0	U.35P01	13.0	1.5	15.0	0.4
U.232-90	100.0	146.0	182.0	155.0	21.0	U.35SE1	17.0	3.0	30.0	0.9

© FACOM 2020