
BU-4150028-@

(Cable Assembly Coaxial BNC to SMA Male to Male RG-316)



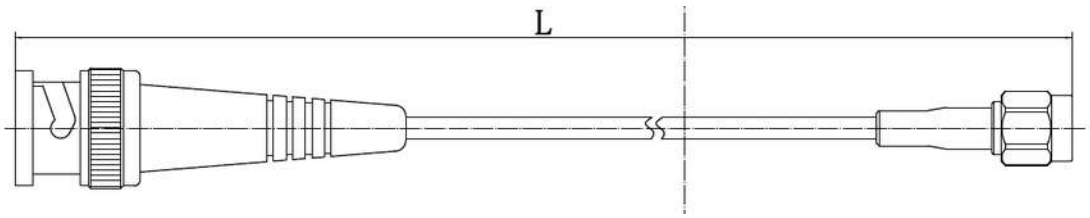

Mueller Electric Company
2850 Gilchrist Rd. Bld 5A
Akron, OH 44305

www.muellerelectric.com

Toll Free: 800.955.2629
Phone: 330.780.2525
Fax: 330.780.2524

Electrical Ratings

Electrical ratings of a cable assembly are determined by the limiting connector type and cable size.

Connector	Cable	Connector Impedance (Ohms)	Frequency (GHz)	VSWR	Working Voltage (At Sea Level)
BNC/SMA	RG-316	50	0-3	1.4 MAX	335V

Product Attributes

Gender	Male to Male
Style	BNC to SMA
1st Connector	BNC Male Plug
2nd Connector	Gold Plated SMA Male Plug
Features	Shielded
Operating Temperature	-65°C (-85°F) to 150°C (302°F)
BU-4150028006 BU-4150028012 BU-4150028018 BU-4150028024 BU-4150028036 BU-4150028048 BU-4150028M1.0 BU-4150028M1.5 BU-4150028M2.0 BU-4150028MM150 BU-4150028MM250 BU-4150028MM500 BU-4150028MM750	6" (152.40 mm) 12" (304.8 mm) 18” (457.2 mm) 24" (609.6 mm) 36” (914.4 mm) 48" (1219.2 mm) 1M (39.4”) 1.5M (59.1”) 2M (78.7”) 150mm (5.9”) 250mm (9.8”) 500mm (19.7”) 750mm (29.5”)
RoHS 3 Compliant	