

- Through-hole (TH) or surface mount (SMD)
- 50mA/24VDC
- Single pole/momentary
- 10,000,000 operations lifetime
- Temperature range:
  - High temp: -40/+160C
- IP 67 sealing
- Actuation force: 3.5N
- Most caps in the catalogue have a version for mounting on 3F switch as well. Contact MEC for further information.

All dimensions in mm *Tolerances -/+0.2mm*

3C (TH, SMD & RAS)

TH

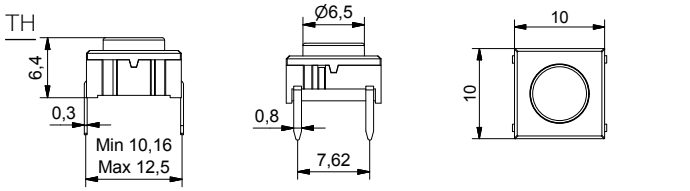

SMD

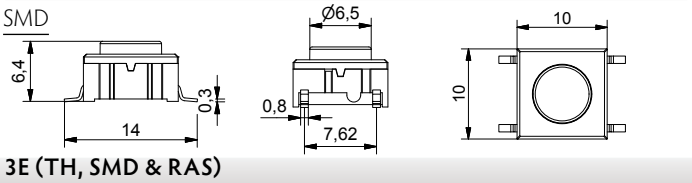

RAS

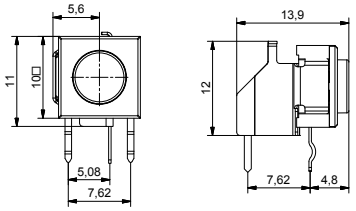

3E (TH, SMD & RAS)

TH

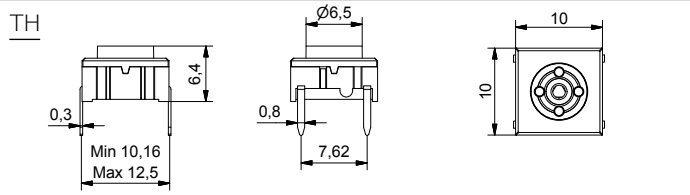

SMD

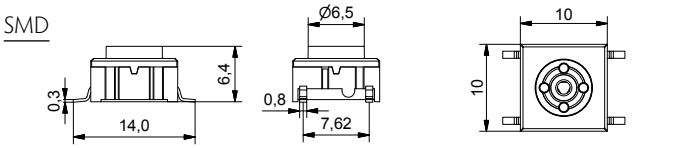

RAS

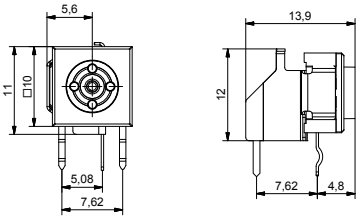

3F (TH, SMD & RAS W/LED)

TH

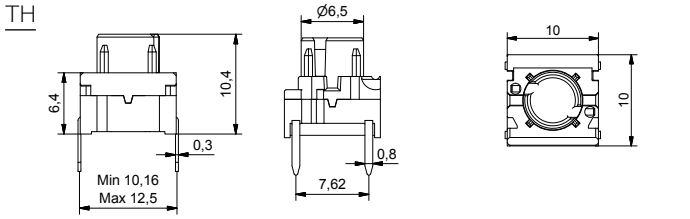

SMD

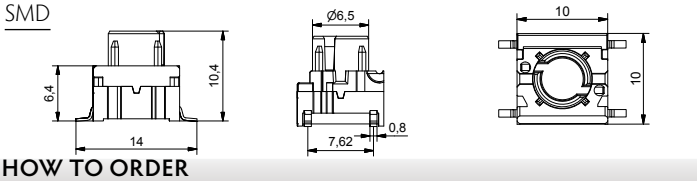

RAS w/LED

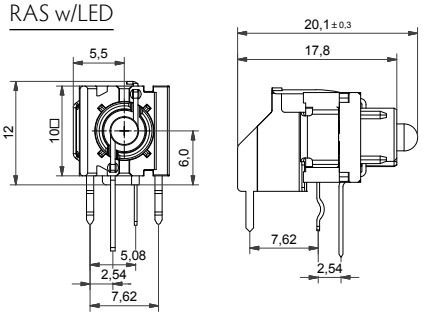

PCB LAYOUT

Through-hole



Surface mount



Through-hole RAS



Through-hole illuminated RAS



HOW TO ORDER

Switch

3C
3E
3F

Mounting

T through-hole
S surface mount

Temperature range

H9 high temp.

LED (onyl for 3F)

00 blue
20 green
40 yellow
60 white
80 red
2040 green/yellow
8020 red/green
8040 red/yellow

Right angle support

RAS optional

3FTH9RAS with LED can be used with the 3 series keycaps: 1D, 1E, 1F, 1K, 1N, 1Q, 1R, 1S, 1T, 1U, 1V, 1WA, 1WD, 1WP, 1X. Ask further information on caps from MEC.

Ordering example: 3CTH9, 3ESH9, 3FTH9RAS *Please see colour codes, updates of products and changes of specifications on www.mec.dk*