

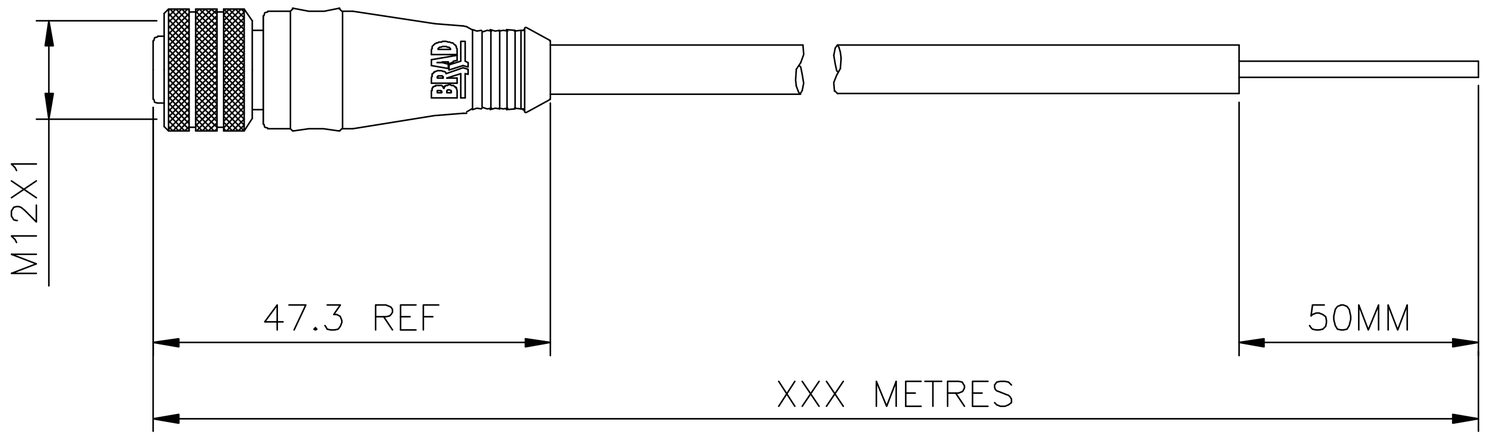

8 WIRE



Pin No.	Wire
1	White
2	Brown
3	Green
4	Yellow
5	Grey
6	Pink
7	Blue
8	Red

PART No MATRIX

OPTIONS

8	0	8	0	0	0	P	0	2	X	X	X	X	X	X

- 8=Micro Change
- 0=Portable
- 8=8 Core
- 000 = Female Straight
- Cable–PUR, 8 x 0.25mm
- M=Metres, F=Feet
- LENGTH: 020=2 METRES, 050=5 METRES, 200=20 METRES
- Coupling Nut Material: Blank=Standard, 1=Stainless Steel, 5=Delrin
- Blank=Yellow (Standard), A=Grey

Specification.

(See alternative variations in matrix key)
Insert Material - PUR (30% Glass Filled)
Contact Material - Brass (CuZn36)
Contact Plating - 2um Ni, 0.70um Gold
Coupling Nuts - Nickel Plated Brass
Seal - Viton O-Ring
Protection Class - IP68
Voltage Rating - 30 VAC / 36 VDC
Contact Current Rating - 4 Amps
Overmoulding - PUR

ECN	Rev	By	Descriptions	Date	Approved
N/A	A	GG	First issue	13.05.04	GG

Third Angle Projection

This drawing and its contents are the proprietary and confidential property of Woodhead Industries Inc. and/or its subsidiaries and may not be used or disclosed to others without the express prior written consent of Woodhead Industries Inc. and/or its subsidiaries.

Applicable Standards ASME Y14.5M ISO 1660

	NAME	DATE
Drawn	G.GREEN	13.05.04
Checked	N.WITTS	13.05.04
Approved	N.WITTS	13.05.04

Material: SEE SPECIFICATION
Finish: SEE SPECIFICATION
Dimensions In MM: 0.0 ± 0.25mm, 0.00 ± 0.10mm, 0.000 ± 0.025mm, Angles ± 1°

Part No. 808000P02MXXX
Size A4
Description: MICRO CHANGE 8 SERIES CONNECTOR LEAD
Drawing No. 808000P02MXXX
Rev A
Scale NTS
SHEET 1 OF 1

Template #: WT